
·		
	·	
	 	. <u></u>


CHEVROLET



1987

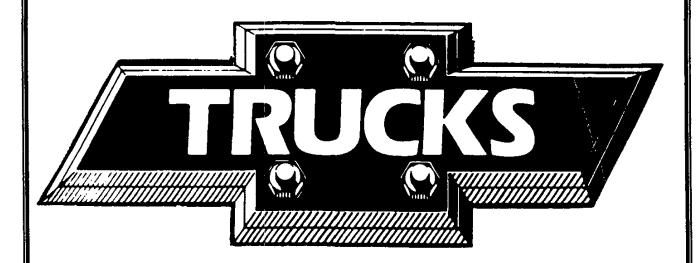

1 9 8 7 --- O R I G I N A L

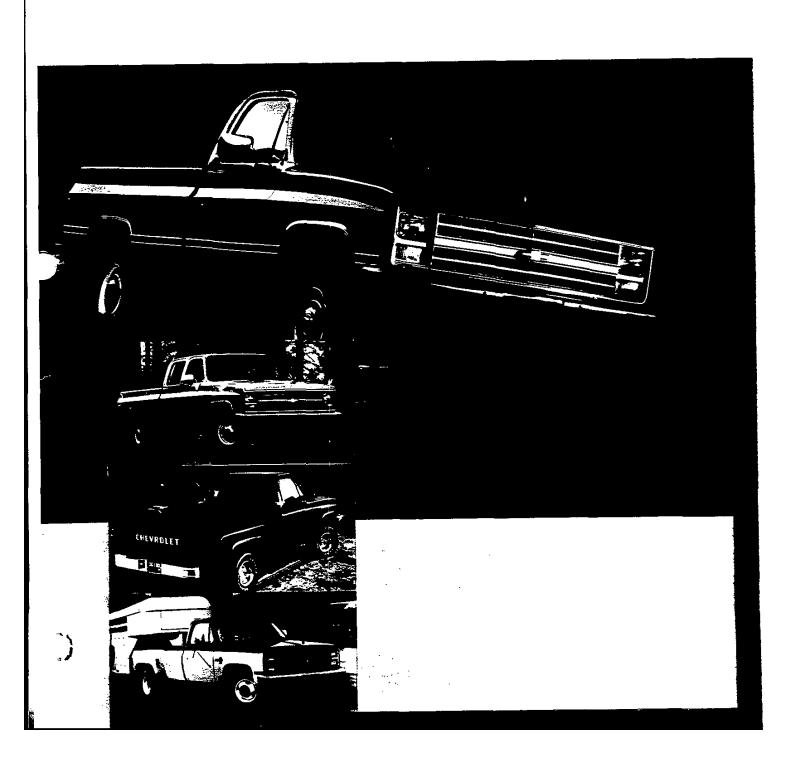



EXTERIOR

- ☐ All paint colors and placements are carryover for 1987.
 ☐ The use of windshield and rear quarter window moldings with bright bead in Scottsdale, RPO Z62, and Silverado, RPO YE9, has been discontinued.
 ☐ New "Fuel Injection" nameplate is located on LH side of tailgate for Fleetside models; RH side for Stepside models.
 - **CAB**
- ☐ Precise seat-back angle and thoughtfully designed bench seat cushion result in comfortable seating positions.

- □ Wet-arm windshield wiper/ washer system provides for a precise spray and good cleaning of the windshield.
 □ Large fuse block provides
- ☐ Large fuse block provides good serviceability.


CHASSIS AND POWER TEAM

☐ Vortec 4.3 Liter V6 gasoline


engine—modern, even-firing V6 with swirl-port combustion chambers and Electronic Fuel Injection—is standard on R10, R20 and V10 models.

☐ Impressive horsepower for the 6.2 Liter Diesel on vehicles over 8,500 lbs. GVWR—148 net HP.

☐ Manual locking hubs are standard on all V models while automatic locking hubs are available on V10 models only.

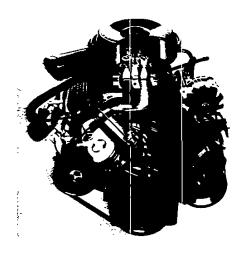



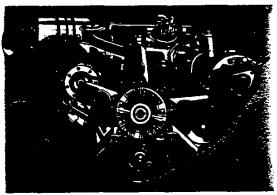

- Delcotron generator capacities have been increased for all gas engine applications. The base capacity increases from 37 amps to 66 amps. Those models equipped with air conditioning, auxiliary heater or rear defogger have a 94-amp unit.
- ☐ All gas engines feature a 5-ribbed poly-vee generator accessory belt drive for greater

belt durability and more positive drive.

☐ All-season tread design tires are standard on all R10 and V10 models. These steel-betted radial tires are designed for foul-weather traction, low noise level and long tread life. ☐ Self-adjusting hydraulic clutch control system provides smooth operation and good


OPTIONS

drivability.

- ☐ Deluxe Front Appearance Option RPO V22 standard on Silverado. Highlights include dual rectangular headlamps and grille with body-color paintcenter-bar treatment.
- ☐ Value Decor Package combines solid color paint with a stripe configuration. Available

- only on Fleetside Pickups with regular cab and single rear wheels.
- ☐ Custom Vinyl and Custom Cloth seat fabric for upper trim levels.
- ☐ Special mounting system for camper-type mirror to reduce vibration.
- ☐ All optional 15" highwaytread steel-belted radial tires feature all-season tread.
- Front tow hooks are available on all models.
- ☐ Cast aluminum wheels for pleasing appearance include four 15" x 7" wheels and center hub covers.

REGULAR CAB STANDARD VALUE FEATURES

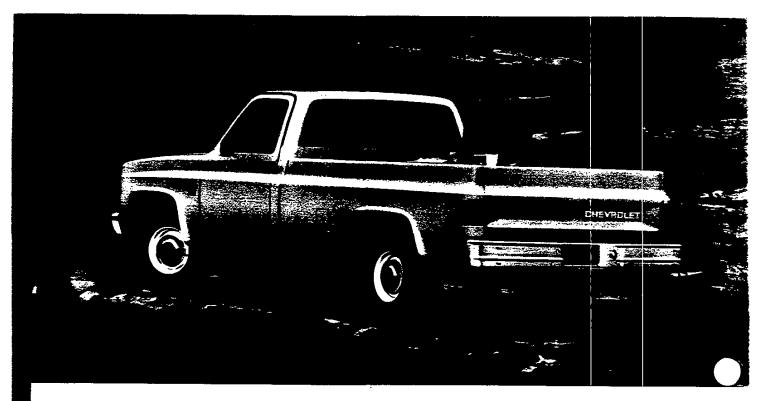

ALL THIS AT NO EXTRA COST:

- Girder beam independent front suspension with contoured control arms, coil springs and hydraulic shock absorbers helps maintain a smooth, steady ride (R10 models only).
- ☐ Two-stage multileaf rear suspension offers progressive support for heavier loads.
- ☐ Counter-angled rear shock absorbers help reduce power hop.
- ☐ Carbon steel ladder-type frame for a strong foundation.
- ☐ Rubber-bushed cab mounts help isolate road noise.

- Self-adjusting hydraulic clutch control for smooth operation with manual transmission.
- ☐ Sealed clutch housing on 4-wheel-drive models with manual transmission.
- ☐ Semi-metallic front and nonasbestos rear linings on most R/V10-20 models.
- ☐ Heavy-duty shift controls for four-speed, manual overdrive transmissions.
- ☐ Front bumper-mounted air dam on R10-20 models up to 8,500 lbs. GVWR contributes
- to fuel economy.


 Alf-season tread design
- steel-betted radial tires standard.

 Low-drag front disc brakes contribute to fuel economy and
- reduce rolling resistance.

 Audible wear sensors on
- ☐ Audible wear sensors on front brakes signal when to replace front brake pads.

- ☐ High Energy Ignition system for quick starts, reduced maintenance.
- ☐ New lightweight "flat top" Freedom battery never needs water.
- Double-wall hood, doors, fender and pickup-box construction adds to structural rigidity.
- ☐ Bright metal roof drip moldings direct water away from door openings.
- ☐ Chromed front bumper and bright metal hubcaps for attractive appearance.
- ☐ Baked-on acrylic enamel paint.
- ☐ Bright exterior mirrors, both sides.

REGULAR CAB STANDARD VALUE FEATURES

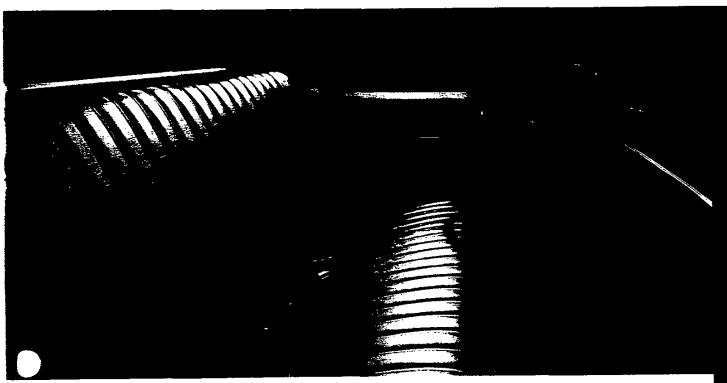

-wide choice to suit preference. ☐ Color-keyed door trim panels. ☐ Seat trim materials of standard vinvl. ☐ Multi-function switch on steering column for turn signals, wiper/washer and headlamp dimmer. □ Counterbalanced hood for easy opening and closing. ☐ Inside hood release for increased theft protection. ☐ Dual 16" electric 2-speed wipers for large wipe area. ☐ Wet-arm windshield wiper/ washer system for precise fluid spray and efficient coverage. ☐ Large padded armrests and sunshades for convenience.

☐ Five cab-interior trim colors

- ☐ Large front windshield glass area. A total of 1,421 square inches for excellent visibility ☐ Adjustable side-door ventipanes for draft-free ventilation. ☐ Day/night inside rearview mirror. ☐ Fully padded instrument panel for safety and appearance. ☐ Front-removable instrument cluster is easy to service. ☐ Theft-deterrent steering column. □ Full-foam seat cushion. -☐ Folding seat-back with inertiatype latch. ☐ Standard seat belt retractors incorporate an automatic comfort feature. ☐ Molded resinated cotton floor and toe panel insulators for improved floor-mat fit and noise reduction.
- Deluxe air heater and defroster for comfort. ☐ Cab interior light. Coat hooks. ☐ Stowage compartment with door in instrument panel for convenience. ☐ Large fuse block for easy serviceability. ☐ Keyless door locking for easy vehicle locking. ☐ Two-key system for theft protection. ☐ Impressive corrosion protection with two-sided galvanized steel in critical areas. ☐ Full front wheelhousings with engine compartment shields for splash protection. ☐ Zincrometal® hood inner panel.

BONUS AND CREW CAB STANDARD VALUE FEATURES



- ☐ Wide-opening cab doors. Easy entrance and exit.
- ☐ Lockable rear cargo space.
- 55.8 cubic feet on Bonus Cabs. ☐ Large front windshield. A total of 1,421 square inches of glass
- area for excellent visibility.

 Double-wall hood, doors,
- fender and pickup-box construction adds to structural rigidity.
- ☐ New lightweight "flat top" Freedom battery never needs water.
- ☐ Self-adjusting hydraulic clutch-control for smooth operation with manual transmission.


- ☐ Low-drag front disc brakes —designed to help contribute to fuel economy and reduce rolling resistance.
- ☐ Audible wear sensors on front disc brakes.
- ☐ Chromed front bumper standard.
- ☐ Bright metal hubcaps for neat appearance.
- ☐ Baked-on acrylic enamel paint.
- ☐ Bright exterior mirrors on both sides.
- ☐ Day/night inside rearview mirror.
- ☐ Three cab-trim interior colors.

- ☐ Fully padded instrument
 panel for safety and appearance.
 ☐ Counterbalanced hood for
- easy opening and closing.

 Inside hood release for
- inside nood release for increased theft protection.
- ☐ Dual 16" electric 2-speed wipers for large wipe area.
- ☐ Wet-arm windshield wiper/ washer system for precise fluid spray and efficient coverage.
- spray and efficient coverage.

 Large padded armrests and sunshades for convenience.
- ☐ Adjustable front side-door ventipanes for draft-free ventilation.

BONUS AND CREW CAB STANDARD VALUE FEATURES

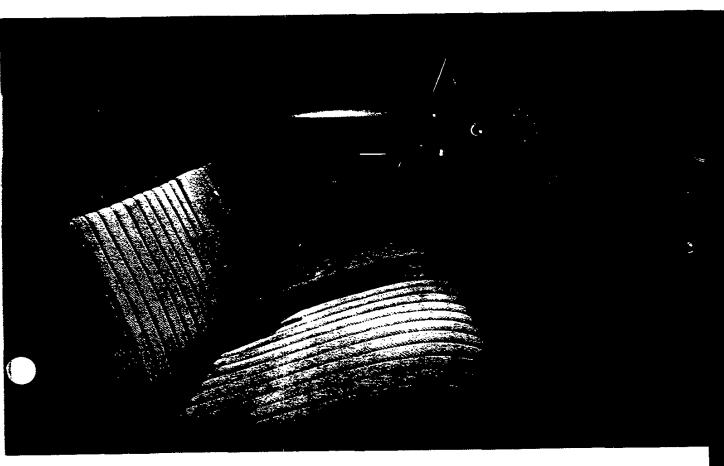


- ☐ Convenient four-door access from either side.
 ☐ Keyless door locking for easy.
- ☐ Keyless door locking for easy vehicle locking.
- ☐ Two-key system for theft protection.
- Front-removable instrument cluster is easy to service.
- ☐ Easy-to-reach instrument controls.
- ☐ Theft-deterrent steering column.

- ☐ Cab interior light.
- ☐ Coat hooks.
- Deluxe air heater and defroster for comfort.
- ☐ Full-foam seat cushion (front and rear in Crew Cabs, front only on Bonus Cabs).
- ☐ Folding seat-back with inertiatype latch (rear seat Crew Cabonly).
- Two-tone leather-grain vinyl material on standard bench seat.
- Shoulder belt retractors incorporate an automatic comfort feature.

- Crew Cabs only: 2 full-width bench seats for up to 6 passengers.
- ☐ Large fuse box for easy serviceability.
- ☐ Full front wheelhousings with engine compartment shields for splash protection.
- ☐ Impressive corrosion protection with two-sided galvanized steel in critical areas.

FLEETSIDE PICKUP BOX VALUE FEATURES

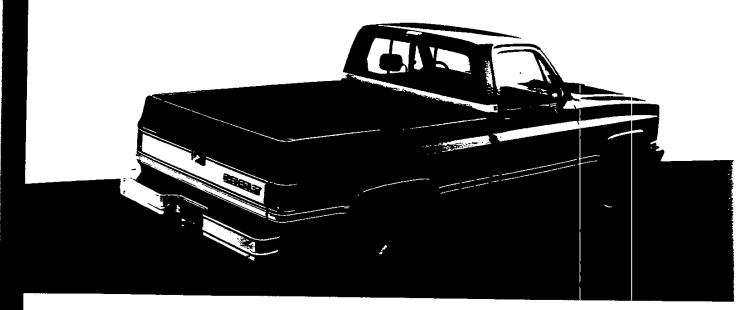

FLEETSIDE

- ☐ 6½- or 8-ft. body length.☐ Ribbed steel floor standard.
- ☐ Integral stake pockets with cargo tie-down provision.
- ☐ Two stake pockets each side on 6½-ft. box.
- ☐ Three stake pockets each side on 8-ft. box.
- ☐ All inner panels embossed
- for structural rigidity.

 Width between wheel-
- housings: 50."
- floor: 72."
- ☐ Inside depth of box: 197" front and 193" rear.
- Impact-resistant wraparound Lexan® tail-lamp lenses.
- ☐ Galvanized high-strength, low-alloy steel for pickup box front-end panel.

STEEL CARGO FLOOR

☐ Standard steel cargo floor with stamped skid ribs for easy loading.



- □ No exposed bolt heads for better appearance.
- Embossed for added rigidity without added weight.
- ☐ Two-sided galvanized steel for corrosion protection.

DOUBLE-WALL CARGO BOX

- ☐ Cargo dents inside don't show outside.
- ☐ Helps Fleetside retain its good looks year after year.
- Extensive use of 2-sided galvanized steel and Zincrometal.®

ELPO (ELECTRO-DEPOSITION) PROCESS

- ☐ Thoroughly primes major pickup box steel parts and tailgate for rust protection.
- Panels immersed in electrically charged primer.



☐ Paint emulsion penetrates all hidden crevices for corrosion protection.

FLAT-TOPPED WHEELHOUSINGS

Permit more effective utilization of entire box loading area.

DOUBLE-WALL TAILGATE

- ☐ One-hand operation.
- Quick-release feature for easy removal, especially helpful to campers. Simply release retaining straps, lift up at right-hand trunnion and pull out from left-hand trunnion (see illustrations). To reinstall, just reverse the procedure.
- "Hemmed" construction to improve corrosion protection.

STEPSIDE PICKUP BOX VALUE FEATURES



STEPSIDE

- \square 6½- or 8-ft. body length.
- ☐ Convenient side step.
- ☐ Wood floor standard.
- ☐ Smooth inner sidewalls.
- ☐ Full-width tailgate with antirattle tailgate latches.
- ☐ Vinyl-covered tailgate chains.
- ☐ Lexan® tail-lamp lenses.

PICKUP BOX

- ☐ Full 50" between sidewalls, holds 4-ft.-wide materials easily.
- ☐ Floor supported by heavy steel cross sills for added strength.
- ☐ Two-sided galvanized steel used for cross sills, skid strips, front panel, side panels, tailgate.

- ☐ Vinyl-covered tailgate chains with wedge-type anti-rattle latches.
- ☐ Two stake pockets each side on 6½-ft. box.
- ☐ Three stake pockets each side on 8-ft, box.
- ☐ ELPO electrocoating process primes Stepside cargo box front panel, sidewalls and tailgate for added corrosion protection.

STEEL SKID STRIPS

- ☐ They hold floor planks securely, yet allow for expansion during changes in temperature and humidity.
- ☐ Flush strip mounting, recessed bolt heads help prevent cargo damage while loading, unloading.



CONVENIENT SIDE STEP

Located between door and rear fender on both sides. The side step provides good footing and easy access to pickup box cargo from either side.

ENGINE VALUE FEATURES



□ Note: for 1987, all gasoline engines in these models will be certified using light-duty ernissions test procedure. This will require the use of a catalylic converter, unleaded fuel and limit the GVWR to a maximum of 10,000 lbs. Because of this, all Series 30 Chassis-Cab models with GVWR of 10,500 lbs. and 11,000 lbs. are discontinued.

☐ THE 4.8 LITER (292 CU. IN.) L6 ENGINE is

discontinued.


☐ All gasoline engines have Electronic Fuel Injection (EFI). The advantages are:

- · Improved fuel control for enhanced cold starting
- Reduced plug fouling
- Improved fuel economy
- · Improved drivability under all operating conditions
- · Greater reliability through the use of fewer parts
- No external adjustments.

☐ THE VORTEC 4.3 LITER V6 ENGINE also features antifriction roller hydraulic valve lifters for 1987. This new feature helps reduce friction and improve fuel economy. Design features include:

- Cylinder heads with swirl-port design
- Centralized spark plug location
- Even firing
- High-compression ratio (9.3:1)
- Electronic spark control to control spark knock
- · Electronic Fuel Injection for improved performance and drivability.

ENGINE VALUE FEATURES



THE 6.2 LITER (379 CU. IN.) V8 DIESEL ENGINE


- RPO LH6 with light-duty emissions for GVWRs 8,500 lbs. and under.
- RPO LL4 with heavy-duty emissions for GVWRs over 8,500 lbs.



THE 7.4 LITER (454 CU. IN.) V8 EFI ENGINE continues with the same availability and power ratings.



THE RPO LE9 5.0 LITER (305 CU. IN.) V8 EFI ENGINE is now available nationwide as well as California. HP and torque are increased by about 6%.



☐ THE 5.7 LITER (350 CU. IN.) V8 EFI ENGINE is now available nationwide in ½- and ¾-ton 2WD Pickups up to 8,500 lbs. GVWR and ½-ton 4WD pickups. In 1986, this engine was available only in California on these models. Horsepower increases about 18% and torque about 4%.

NOTE: Check power team charts for engine availability on all models.

ENGINE RATINGS ALL STATES

SAE Net Ratings	A4.3 Liter 262 EFI V6	AS.O Liter 305 EFI V8
Net Horsepower	160 @ 4000 rpm	170 @ 4000 rpm
Net Torque, lb-ft	235 @ 2400 rpm	260 @ 2400 rpm


SAE Net Ratings	A5.7 Liter	≡ 5.7 liter	■7.4 Liter
	350 EFI V8	350 EFI V8	454 EFI V8
Net Horsepower	210 @ 4000 rpm	185 @ 4000 rpm	230 @ 3600 rpm
	300 @ 2800 rpm	295 @ 2400 rpm	385 @ 1600 rpm

SAE Net Ratings	A6.2 Liter 379 V8 Diesel	#6.2 Liter 379 V8 Diesel
Net Horsepower	130 @ 3600 rpm 240 @ 2000 rpm	148 @ 3600 rpm 246 @ 2000 rpm

▲For models with a GVWR up to 8500 lbs.

■For models with a GVWR from 8501 lbs. to 10,000 lbs.

CHASSIS VALUE FEATURES

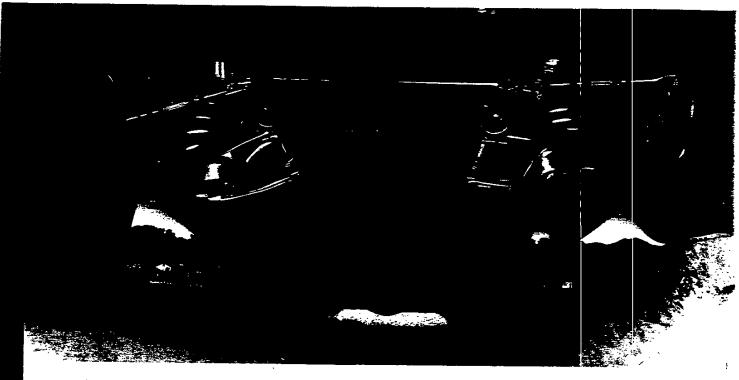

RUGGED GIRDER BEAM INDEPENDENT FRONT SUSPENSION ON SERIES R10-20-30

- ☐ Steel control arms.
- ☐ Computer-selected frictionfree coil springs.
- ☐ Each wheel steps independently over rough spots to help smooth ride.
- ☐ Shielded shock absorbers to reduce stone damage.

MULTILEAF REAR SPRINGS

- Provide a good ride with light loads, progressively firmer support as cargo weight increases.
- ☐ Spring eyes and shackles are rubber bushed to reduce noise and ride harshness.

- □ Counter-angled rear shock absorbers to reduce wheel hop.
 □ Seven-leaf rear spring for
- greater capacity on R/Vs with GVWR over 8,500 lbs.
- ☐ Auxiliary rear springs also available on some models.

BRAKES


- ☐ Height-sensing brake system, using a dual split-point sensing brake valve, is standard for R/V20 Series equipped with RPO J55 and all R/V30 models. The valve provides optimum brake balance by distributing the braking force effectively to the front and rear wheels based on light- or heavy-payload conditions.
- ☐ Semi-metallic front brake pads on R/V10-20 models and nonasbestos linings on rear of most R/V10-20s.


- ☐ Brake system matched to pickup GVW Rating.
- ☐ Shielded front discs resist fade, recover quickly from water immersion.
- ☐ Audible front disc pad wear sensor standard on all models.☐ Rear drums finned for cool-
- ing, shaped to help exclude contaminants.

FOUR-WHEEL DRIVE

- \square Available on all Series 10-20 and 30 models.
- ☐ Includes two-speed transfer case with lower-range gearing for rugged conditions.
- ☐ Variable-rate, leaf-type front springs with front stabilizer bar. ☐ Integral power steering
- standard on all models.

CHASSIS VALUE FEATURES

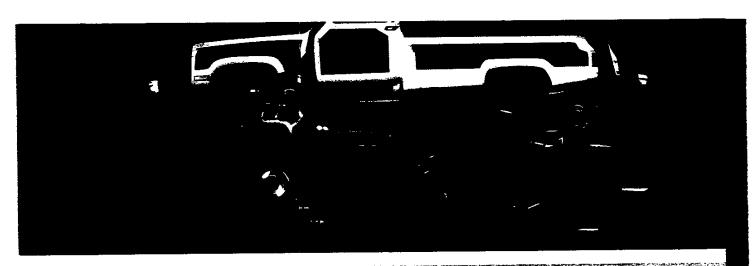

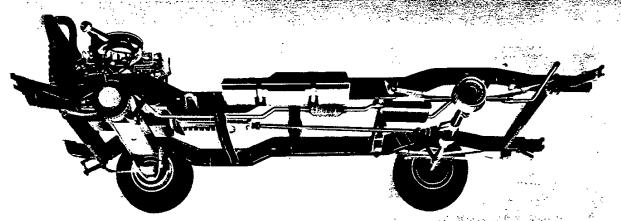

FUEL TANKS

- Approximate capacity: 16 gallons on short-WB models (standard, left-hand mount and fill).
- ☐ Auxiliary fuel tank available on all models: Dual 16 gallons on R10, R20 models (8,500 lbs. GVWR and under), dual 20 gallons on long WB diesel and all R20-30 models over 8,500 lbs. GVWR.
- ☐ Plastic fuel tank bottom shield helps guard against punctures.

TIRES

☐ All-season steel-belted radial tires, designed for foul weather traction, are standard on all R10 and V10 models.

FRAME SIDE RAILS

- ☐ Full-depth, solid channel-type frame.
- ☐ Ladder-type construction.
 ☐ Drop center design for lower cab floor height allows easy
- entry and exit.


 Basic material for all frames is carbon steel with a yield strength of up to 39,000 lbs. psi.

☐ Frame width tapers at the front to accommodate the front suspension and is wider at the rear for stability.

FRAME CROSS MEMBERS

☐ Cross members are securely riveted to the side rails and rail flanges.

ANTI-CORROSION VALUE FEATURES

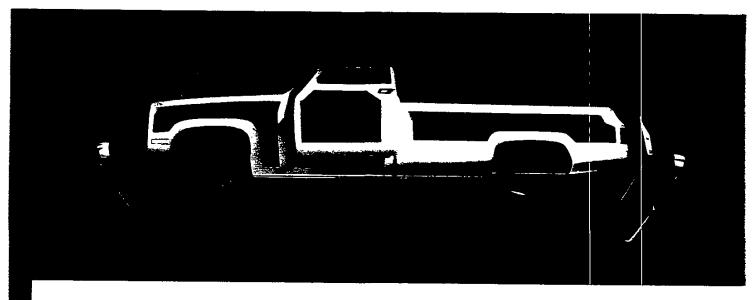

FULL FRONT WHEELHOUSINGS

- ☐ Helps protect engine compartment and front fenders against road splash and stone damage; tough all-steel bathtub-type.
- Engine compartment shields are mounted between the wheelhousings and frame rails for splash protection.


ANTI-CORROSION MEASURES

- ☐ Special steels such as precoated steel, galvanized steel and zinc-iron alloy steel are used for areas especially vulnerable to corrosion.
- ☐ Protective coatings are used for certain body areas such as inner surfaces of front fender panels and outer front surfaces of the radiator support.
- ☐ All parts are thoroughly cleaned and dried.
- \square Body and sheet metal are primed.

- ☐ Pickup box sidewalls, front panel and tailgate and Fleetside steel floor are totally immersed in primer and electrically charged—drawing paint into hidden seams and crevices for added corrosion protection.
- ☐ Zincrometal® for hood outer panel, front fenders, door outer panels, cab back panel, Fleetside pickup-box outer panels and tailgate.
- Galvanized steel for cab floor, inner front fenders, door frames, inner door panels, inner hood panel, pickup-box floor, front-end panel and inner side panels.
- ☐ Finish paint is baked on. ☐ Use of zinc-plated steel for the painted rear step bumper (RPO V43).
- ☐ Aluminum wax preservative is sprayed inside the plenum chamber, the door rocker panels, lower corners of the cab back panel and the lower portions of the doors and fenders.


- Urethane stone shields are added ahead of the rear wheel-housings on Fleetside models to reduce stone damage.
- ☐ Yards of weatherproofing butyl-rubber weather stripping are placed around doors and windows. Sealing compounds and rubber gaskets are used at joints and light enclosures. Plus a flush-and-dry system for water drainage and air drying between lower double-wall areas.
- ☐ Backed by Chevrolet's Three-Year Perforation-From-Corrosion limited warranty, Chevrolet dealers will repair or replace at no charge any part, except exhaust system components, found to have developed perforation (rust-through) due to corrosion. This warranty begins on the date the truck is first delivered or put in use and extends for 36 months regardless of mileage.

MAINTENANCE VALUE FEATURES

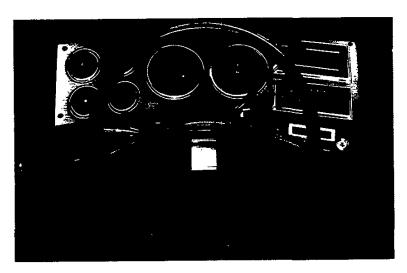

NEW DELCO FREEDOM BATTERY

☐ Lighter weight "flat top" case ☐ Higher cold cranking amps, except for diesels. The increases are:



- ☐ Case material designed for durability.
- □ Never needs water.
- Lead-calcium grids virtually eliminate overcharge and self-discharge.
- ☐ Built-in test hydrometer.
- ☐ Corrosion-protected side terminals.
- Maintenance-free.

MAINTENANCE SCHEDULE FOR MOST VEHICLES RATED 8,500 LBS. GVWR AND UNDER

- ☐ Spark plug life, up to 30,000 miles between tune-ups.
- ☐ With unleaded fuel, engine oil stays cleaner.
- ☐ Oil changes recommended at 12 months or 7,500 miles in normal driving with gasoline engines.
- ☐ Chart below shows extended service intervals. (See Service Manual for recommendations).

INTEGRAL VOLTAGE REGULATOR

- ☐ Built into standard and optional Delcotron generators. ☐ Transistorized for greater
- ☐ Transistorized for greater reliability.

RECOMMENDED SERVICE INTERVALS GASOLINE ENGINES*
(TRUCKS UNDER 8,500 LBS. GVWR)

"Severe service conditions, such as trailer towing, driving in dusty areas, frequent idling, may require more frequent service.

INTEGRAL STARTER SOLENOID

☐ For positive starter engagement.

DISTRIBUTOR WITH INTEGRAL COIL

☐ Eliminates separate maintenance.

HEADLAMP AND MAIN ENGINE WIRING HARNESS

☐ Enclosed in plastic conduit for protection and easy service.

FUSE BOX

☐ Large fuse block with tweezer-type fuse removal for easy serviceability.

DURABLE MUFFLERS

- ☐ Heavy-gage outer shell, interior baffles.
- ☐ Aluminized inside and out for added durability.

FRONT-SERVICED INSTRUMENTATION


- ☐ Cockpit-type faceplate removes from front.
- ☐ Quick, easy servicing.
- ☐ Heating/air-conditioning controls also serviceable from the front.

COOLANT RECOVERY SYSTEM

- Excess coolant collects in reservoir, returns to radiator automatically when it cools.
- ☐ Helps maintain proper coolant levels.
- ☐ Standard on all Chevrolet Pickups.



SCOTTSDALE/SILVERADO TRIM OPTION

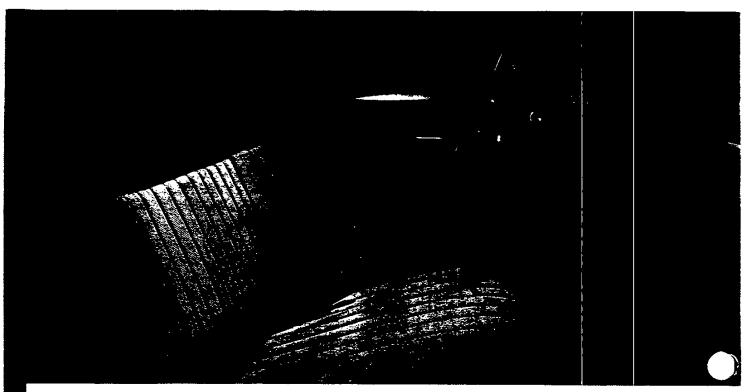

Scottsdale trim in Custom Vinyl.

For regular cabs, the Scottsdale option is available in Deluxe Cloth or Custom Vinyl seat trim. The Silverado option is available in Custom Vinyl or Custom Cloth seat trim. Colors: Blue, Burgundy, Charcoal, Mahogany or Saddle Tan.


For Bonus and Crew Cabs, the Scottsdale option is available in vinyl, Custom Vinyl or Custom Cloth seat trim. The Silverado option is available in Custom Vinyl or Custom Cloth seat trim. Colors: Blue, Burgundy or Saddle Tan.

See pages D, E and F for complete details on other trim features of the Scottsdale and Silverado options.



Silverado trim in Custom Cloth.


PICKUP MODEL SELECTOR

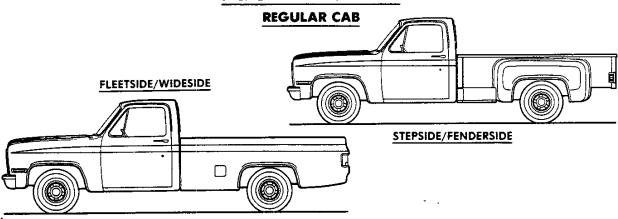

		*********		BODY ORDE	RING CODE	
SERIES	MODEL N	NUMBER	GASOLINE MODELS		DIESEL MODELS	
PARTEU	6½' BOX 8' BOX		FLEETSIDE/ WIDESIDE	STEPSIDE/ FENDERSIDE	FLEETSIDE/ WIDESIDE	STEPSIDE/ FENDERSIDE
R10/1500	R10703	R 10903	E63	*E62	E63/B3J	*E62/B3J
R20/2500	_	R20903	E63	E62	E63/B3J	E62/B3J
R20/2500/C6P	_	R20903	E63/C6P	E62/C6P	E63/C6P/B3J	E62/C6P/B3J
R30/3500	_	R30903	E63	E62	E63/B3J	E62/B3J
V10/1500 (4X4)	V 10703	V 10903	E63	*E62	E63/B3J	*E62/B3J
V20/2500 (4X4)	_	V20903	E63	E62	E63/B3J	E62/B3J
V20/2500/C6P (4X4)	_	V20903	E63/C6P	E62/C6P	E63/C6P/B3J	E62/C6P/B3J
V30/3500 (4X4)	_	V30903	E63	_	E63/B3J	_

^{*}Available on R/V 10703 models only.



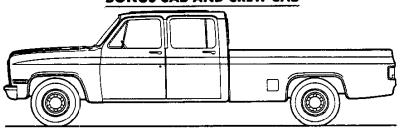

			BODY ORDERING CODE	
SERIES	model number eries bonus cab crew cab		GASOLINE MODELS	DIESEL MODELS
			8' FLEETSIDE/ WIDESIDE BOX	8' FLEETSIDE/ WIDESIDE BOX
	R20943	-	E63/YG4	E63/YG4/B3J
R20/2500	_	R20943	E63/AS3	E63/AS3/B3J
	R30943		E63/YG4	E63/YG4/B3J
R30/3500		R30943	E63/AS3	E63/AS3/B3J
V30/3500 (4X4)	V30943		E63/YG4	E63/YG4/B3J
730/3300 (4A4)	_	V30943	E63/AS3	E63/AS3/B3J

GASOLINE

R/V PICKUP-2-Wheel Drive

R10/1500 REGULAR CABS STANDARD SPECIFICATIONS

Series	R10/1500	
Engine		
Base Equip.	4.3 Liter, 262 EFI V6	
Clutch	11"; 124 sq. in.	
Air Filter	Oiled-paper Element	
Oil Filter	Throwaway Type	
Exhaust System	Single; Aluminized	
Emission Control Systems	See Engine & Cooling Section for specific model applications	
Suspension, Front	Independent; Coil Springs	
Capacity	2950 lb.	
Springs @ Ground	1475 lb. ea.	
Shock Absorbers	25mm dia.	
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs	
Axle Capacity	3750 lb.	
Axle Ratio	2.73	
Springs @ Ground	1550 lb. ea.	
Shock Absorbers	25mm dia.	
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 11.86" Rotor	
Rear	Drum; 11" x 2"	
Booster	• ***	
Parking	Cable to Rear Wheels	
Electrical	12 Volt; Negative Ground	
Battery—Freedom Type	525 CCA ◆ @ 0°F.	
-Reserve Capacity	90 min. @ 80°F.	
Delcotron Generator	66 amp.	
Frame	Carbon Steel; 36, 39,000 psi	
Section Modulus	3.10	
Fuel Tank (nominal capacity)		
-117.5" WB	l6 gal.	
-131.5" WB	20 gal.	
Steering Gear Type	Manual; Recirculating Ball Gear	
Linkage	Parallelogram	
Transmission	Fully Synchronized 3-Speed Manual	
Shift Location	Steering Column	
Tires	(5) P195/75R15 All Seasons Steel Belted Radial	
Wheels	(5) Disc	
	15" x 6"	

[◆]CCA-Cold Cranking Amps

R/V PICKUP—2-Wheel Drive

DIESEL

R10/1500 REGULAR CABS STANDARD SPECIFICATIONS

Series	★R10/1500	
Engine Base Equip. Clutch Air Filter Oil Filter Oil Cooler Exhaust System Emission Control Systems	6.2 Liter, 379 Cu. In. V8 Diesel 12"; 150 sq. in. Poly-wrapped, Oiled-paper Element Throwaway Type Standard Dual; Aluminized See Engine & Cooling Section for specific model applications	
Suspension, Front Capacity Springs @ Ground Shock Absorbers	Independent; Coil Springs 3400 lb. 1700 lb. ea. 25mm dia.	
Suspension, Rear Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs 3750 lb. 3.08 1550 lb. ea. 25mm dia.	
Brakes Front Rear Booster Parking	Hydraulic; Self-adjusting Disc; 11.86" Rotor Drum; 11" x 2" Hydraulic Power Cable to Rear Wheels	
Electrical Battery — Freedom Type — Reserve Capacity Delcotron Generator Engine Block Heater	12 Volt; Negative Ground Two; 540 CCA ← ea. @ 0°F. 115 min. ea. @ 80°F. 66 amp. 600 watts, 120 volts	
Frame Section Modulus	Carbon Steel; 36,-39,000 psi 3.10	
Fuel Tank (nominal capacity) -117.5" WB -131.5" WB	16 gal. 20 gal.	
Steering Gear Type	Integral Power	
Transmission Shift Location	4-Speed Manual with Overdrive Floor	
Tires	(5) P205/75R15 All Seasons Steel Belted Radial	
Wheels	(5) Disc 15" x 6"	

[★]Not available for registration in the State of California

[◆]CCA-Cold Cranking Amps

GASOLINE

R/V PICKUP—2-Wheel Drive

R20/2500 REGULAR CABS R20/2500 BONUS CABS & CREW CABS STANDARD SPECIFICATIONS

Series	R20/2500 Regular Cab	R20/2500/C6P Regular Cab	R20/2500 Bonus/Crew Cab			
Engine Base Equip.		5.7 Liter, 35				
Clutch	11"; 124 sq. in.	12"; 150	sq. in.			
Air Filter Oil Filter		Oiled-paper Element Throwaway Type				
Exhaust System	Single; Aluminized	Single; Stain	iless Steel			
Emission Control Systems	See Engine & Co	See Engine & Cooling Section for specific model applications				
Suspension, Front Capacity		Independent; Coil Springs 3800 lb.	3			
Springs @ Ground	1750 lb. ea.	1900 lb	o, ea.			
Shock Absorbers	25mm dia.	32mm				
Stabilizer Bar	_	1.06"	dia.			
Suspension, Rear	Salisbury Axle; I	Typoid Drive; Two-stage M	fulti-leaf Springs			
Axle Capacity	5700 lb.	6000 lb.	7500 lb.			
Axle Ratio	3.42	*3.23	3.73			
Springs @ Ground	2000 lb. ea.	3000 lb. ea.	3000 lb. ea.			
Shock Absorbers	25mm dia.	32mm dia.	32mm dia.			
Brakes Front						
Rear						
Booster	Dual Diaphragm					
Electrical Battery—Freedom Type —Reserve Capacity Delcotron Generator	525 CCA ◆ @ 0°F. 90 min. @ 80°F.					
Frame		Carbon Steel; 36,-39,000 ps	<u> </u>			
Section Modulus	3.57	4.53	7.33			
Fuel Tank (nominal capacity)		20 gal.				
Steering Gear Type Linkage	Ma	nual; Recirculating Ball G	ear			
	Parallelogram					
Transmission Shift Location	4-Speed Manual (SM 465) Floor					
Tires	(4) LT 215/85R16C Front: LT 235/85R16D (8PR) (6PR) Rear: LT 235/85R16E (10PR)					
Wheels	(4) Disc 16" x 6.5"					

^{*}Standard engine not available for registration in the State of California; see Power Teams Chart

^{*3.42} in California

[◆]CCĀ-Cold Cranking Amps

R/V PICKUP—2-Wheel Drive

DIESEL

R20/2500 REGULAR CABS R20/2500 BONUS CABS & CREW CABS STANDARD SPECIFICATIONS

Series	★R20/2500 Regular Cab	R20/2500/C6P Regular Cab	R20/2500 Bonus/Crew Cab
Engine	<u></u>		
Base Equip.	€	.2 Liter, 379 Cu. In V8 Dies	sel
Clutch	12"; 150 sq. in.		
Air Filter	Poly-wrapped, Oiled-paper Element		
Oil Filter		Throwaway Type	
Oil Cooler	Standard		
Exhaust System	Dual; Aluminized		
Emission Control Systems	See Engine & C	ooling Section for specific r	nodel applications
Suspension, Front		Independent; Coil Springs	5
Capacity		3800 lb.	
Springs @ Ground	1750 lb. ea.	1900 lk	
Shock Absorbers	25mm dia.	32mm	
Stabilizer Bar	-	1.06"	dia.
Suspension, Rear	Salisbury Axle	Hypoid Drive; Two-stage I	Multi-leaf Springs
Axle Capacity	5700 lb.	6000 lb.	7500 lb.
Axle Ratio	3.42	3.73	3.73
Springs, Main @ Ground	2000 lb. ea.	3000 lb. ea.	3000 lb. ea.
Shock Absorbers	25mm dia.	32mm dia.	32mm dia
Brakes	Hydraulic; Self-adjusting		
Front	Disc; 12.5" Rotor		
Rear			" x 2.5"
Booster			
Parking	·		
Electrical	12 Volt; Negative Ground		l
Battery-Freedom Type		Two: 540 CCA ◆ ea. @ 0°I	₹.
-Reserve Capacity.		115 min. ea. @ 80°F.	
Delcotron Generator		66 amp.	
Engine Block Heater		600 watts, 120 volts	
Frame		Carbon Steel; 36,-39,000 p	si
Section Modulus	3.57	4.53	7.33
Fuel Tank (nominal capacity).	20 gal.		
Steering Gear Type	Integral Power		
Transmission Shift Location	4-Speed Manual (SM 465) Floor		
Tires	. (4) LT 215/85R16C Front: LT 235/85R16D (8PR) Rear: LT 235/85R16E (10PR)		
Wheels Size	`'		

[★]Not available for registration in the State of California

[◆]CCA-Cold Cranking Amps

GASOLINE

R/V PICKUP—2-Wheel Drive

R30/3500 REGULAR CABS R30/3500 BONUS CABS & CREW CABS

STANDARD SPECIFICATIONS

Series	R30/3500 Regular Cab	R30/3500 Bonus/Crew Cab	
Engine Base Equip. Clutch Air Filter Oil Filter Exhaust System Emission Control Systems	5.7 Liter, 350 EFI V8 12"; 150 sq. in. Oiled-paper Element Throwaway type Single; Stainless Steel See Engine & Cooling Section for specific model applications		
Suspension, Front Capacity Springs @ Ground Shock Absorbers	Independent; Coil Springs 3800 lb. 4000 lb. 1900 lb. ea. 2000 lb. ea. 32mm		
Suspension, Rear Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs 7500 lb. 3.73 3500 lb. ea. 32mm dia.		
Brakes Front Rear Booster Parking	Hydraulic, Self-adjusting Disc; 12.5" rotor Drum; 13" x 3.5" Hydraulic Power Cable to Rear Wheels		
Electrical Battery – Freedom Type - Reserve Capacity Delcotron Generator	12 Volt; Negative Ground 525 CCA ♦ @ 0°F. 90 min. @ 80°F. 66 amp.		
Frame Section Modulus	Carbon Stee 6.14	l; 36,-39,000 psi 7.33	
Fuel Tank (Nominal Capacity)	20 gal.		
Steering Gear Type	Manual; Recirculating Ball Gear Parallelogram		
Transmission Shift Location	4-Speed Manual (SM 465) Floor		
Tires – Front – – Rear – – – – – – – – – – – – – – – – – – –	(2) LT235/85R16D (8PR) (2) LT235/85R16E (10PR)		
Wheels	(4) Disc 16" x 6.5"		

[♦]CCA-Cold Cranking Amps

R/V PICKUP—2-Wheel Drive

DIESEL

R30/3500 REGULAR CABS R30/3500 BONUS CABS & CREW CABS

STANDARD SPECIFICATIONS

Series	R30/3500 Regular Cab	R30/3500 Bonus/Crew Cab
Engine Base Equip. Clutch Air Filter Oil Filter Oil Cooler Exhaust System Emission Control Systems	6.2 Liter, 379 Cu. In. V8 Diesel 12"; 150 sq. in. Poly-wrapped, Oiled-paper Element Throwaway type Standard Dual; Aluminized See Engine & Cooling Section for specific model applications	
Suspension, Front Capacity Springs @ Ground Shock Absorbers	Independent; 3800 lb. 1900 lb. ea. 32r	4000 lb. 2000 lb. ea.
Suspension, Rear Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs 7500 lb. 4.10 3500 lb. ea. 32mm dia.	
Brakes Front Rear Booster Parking	Hydraulic, Self-adjusting Disc; 12.5" rotor Drum; 13" x 3.5" Hydraulic Power Cable to Rear Wheels	
Electrical Battery — Freedom Type — Reserve Capacity Delcotron Generator Engine Oil Cooler	12 Volt; Negative Ground Two; 540 CCA♦ ea. @ 0°F. 115 min. ea. @ 80°F. 66 amp. 600 watts, 120 volts	
Frame Section Modulus	Carbon Steel: 6.14	36,-39,000 psi 7.33
Fuel Tank (Nominal Capacity)	20 gal.	
Steering Gear Type	Integral Power	
Transmission Shift Location	4-Speed Manual (SM 465) Floor	
Tires—Front —Rear	(2) LT235/85R16D (8PR) (2) LT235/85R16E (10PR)	
Wheels Size	(4) Disc 16" x 6.5"	

[♦]CCA-Cold Cranking Amps

GASOLINE

R/V PICKUP—4-Wheel Drive

V10/1500-20/2500 REGULAR CABS

STANDARD SPECIFICATIONS

Series	V10/1500	V20/2500★	V20/2500/C6P		
Engine			·		
Base Equip	4.3 Liter,		Liter,		
Clutch	262 EFI V6 11"; 124 sg. in.		IFI V8 0 sq. in.		
Air Filter Oil Filter	, , , , , , , , , , , , , , , , , , , ,	Oiled-paper Element Throwaway type			
Exhaust System	Single: A	luminized	Single; Stainless Steel		
Emission Control System		oling Section for specific			
Suspension, Front		Hypoid Drive; Single Sta			
Capacity Axle Ratio Springs @ Ground Shock Absorbers	3600 lb. 3.42 1850 lb. ea. 25mm dia.	3800 lb. 3.23 1850 lb. ea. 25mm dia.	3800 lb. 3.42 1850 lb. ea. 32mm dia.		
Stabilizer Bar Hubs, Manual Locking	Domini did.	1.25" dia. Standard	osam uu.		
Suspension, Rear	Salisbury Axle; I	Hypoid Drive; Two-stage	Multi-leaf Springs		
Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers	3750 lb. 3.42 1875 lb. ea. 25mm dia.	5700 lb. 3.23 2000 lb. ea. 25mm dia.	6000 lb. 3.42 3000 lb. ea. 32mm dia.		
Brakes		Hydraulic—Self-adjustin	ġ		
Front	Disc; 11.86" Rotor Drum; 11.15" x 2.75"	Disc; 12.5" Rotor Drum; 11.15" x 2.75"	Disc; 12.5" Rotor Drum; 13.0" x 2.5"		
Booster Parking		Dual Diaphragm Cable to Rear Wheels			
Electrical	,	12 Volt; Negative Ground	d		
Battery — Freedom Type		525 CCA ◆ @ 0°F. 90 min. @ 80°F.			
Delcotron Generator		66 amp.			
Frame		Carbon Steel; 36,-39,000 I	osi		
Section Modulus — 117.5" WB. —131.5" WB.	3.14 3.88	3.88	<u> </u>		
Fuel Tank (nominal capacity) — 117.5" WB — 131.5" WB	16 gal. 20 gal.	 20 gal.	 20 gal.		
Steering Gear Type	Integral Power				
Transmission Shift Location	. 4-Speed Manual (SM 465) Floor				
Transfer Case Shift Lever	. New Process 208 2-Speed Conventional				
Tires	(5) P235/75R15 All Seasons Steel Belted Radial	Fr. (2) LT235/85R16D (8PR) Rr. (2) LT235/85R16E (10PR)			
Wheels	(5) Disc 15" x 6"	(4) Disc 16" x 6.5"	(4) Disc 16" x 6.5"		
	·				

[★]Not available for registration in the State of California

[◆]CCA-Cold Cranking Amps

R/V PICKUP-4-Wheel Drive

V10/1500-20/2500 REGULAR CABS

DIESEL

STANDARD SPECIFICATIONS

Series	★V10/1500	★V20/2500	V20/2500/C6P		
Engine Base Equip. Clutch Air Filter Oil Filter Oil Cooler Exhaust System Emission Control System	12"; 150 sq. in. Poly-wrapped Oiled-paper Element Throwaway type Standard Dual; Aluminized				
Suspension, Front	Salisbury Axle; l	Hypoid Drive; Single Sta	ige Leaf Springs		
Capacity Axle Ratio Springs @ Ground Shock Absorbers	3600 lb. 3.08 1850 lb. ea. 25mm dia	3800 lb. 3.73 1850 lb. ea. 25mm dia.	3800 lb. 3.73 1850 lb. ea. 32mm dia.		
Stabilizer Bar Hubs, Manual Locking		1.25" dia. Standard			
Suspension, Rear	Salisbury Axle; H	lypoid Drive; Two-stage l			
Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers	3750 lb. 3.08 1875 lb. ea. 25mm dia.	5700 lb. 3.73 2000 lb. ea. 25mm dia.	6000 lb. 3.73 3000 lb. ea. 32mm dia.		
Brakes					
Front	Disc; 11.86" Rotor Drum; 11.15" x 2.75"	Disc; 12.5" Rotor Drum; 11.15" x 2.75"	Disc; 12.5" Rotor Drum; 13.0" x 2.5"		
Booster Parking		Hydraulic Power Cable to Rear Wheels			
Electrical Battery — Freedom Type — Reserve Capacity Delcotron Generator Engine Block Heater	12 Volt; Negative Ground Two; 540 CCA • ea. @ 0°F. 115 min. ea. @ 80°F. 66 amp.				
Frame	O	arbon Steel; 36,-39,000 r	osi		
Section Modulus — 117.5" WB. —131.5" WB.	3.14 3.88	3.88	4.53		
Fuel Tank (nominal capacity)	l6 gal. 20 gal.	20 gal.	_ 20 gal.		
Steering Gear Type	Integral Power				
Transmission Shift Location	4-Speed Manual (SM 465)				
Transfer Case Shift Lever	New Process 208 2-Speed Conventional				
Tires	(5) P235/75R15 All Seasons Steel Belted Radial	(4) LT215/85R16C (6PR)	Fr. (2) LT235/85R16D (8PR) Rr. (2) LT235/85R16E (10PR)		
Wheels	(5) Disc 15" x 6"	(4) Disc 16" x 6.5"	(4) Disc 16" x 6.5"		

[★]Not available for registration in the State of California

[◆]CCA-Cold Cranking Amps

GASOLINE

R/V PICKUP—4-Wheel Drive

V30/3500 REGULAR CABS V30/3500 BONUS CAB & CREW CABS

STANDARD SPECIFICATIONS

Series	V30/3500 Regular Cab	V30/3500 Bonus/Crew Cab			
Engine Base Equip. Clutch	5.7 Liter, 350 EFI V8 12"; 150 sq. in.				
Air Filter Oil Filter		per Element away Type			
Exhaust System Emission Control Systems	Single; Si See Engine & Cooling Section	tainless Steel on for specific model applications			
Suspension, Front Capacity Axle Ratio	Salisbury Axle; Hypoid Drive; Single Stage Leaf Springs 4500 lb. 3.73				
Springs @ Ground		0 lb. ea. nm dia.			
Stabilizer Bar		nm cna. 5" dia.			
Hubs, Manual Locking	Sta	andard			
Suspension, Rear		re; Two-stage Multi-leaf Springs 600 lb.			
Axle Ratio		3.73			
Springs @ Ground	3500	0 lb. ea.			
Shock Absorbers	32mm dia.				
Brakes Front		Self-adjusting 2.5" Rotor			
Rear		13.0" x 3.5"			
Booster		ılic Power			
Electrical	Cable to Rear Wheels				
Battery - Freedom Type		gative Ground 'A♦@ 0°F.			
-Reserve Capacity	90 min	a. @ 80°F.			
Delcotron Generator		amp.			
Frame Section Modulus	Carbon Stee 6.14	il; 36, 39,000 psi 7.33			
Fuel Tank (nominal capacity)		7.55 O gal.			
Steering Gear Type		· · · · · · · · · · · · · · · · · · ·			
Transmission	Integral Power				
Shift Location	4-Speed Manual (SM 465) Floor				
Transfer Case Shift Lever PTO Opening	New Process 205 2-Speed Conventional Single Lever				
Tires — Front —Rear	Left Side (2) LT235/85R16D (8PR) (2) LT235/85R16E (10PR)				
Wheels	(4)	Disc x 6.5"			

[♦]CCA-Cold Cranking Amps

R/V PICKUP—4-Wheel Drive


DIESEL

V30/3500 REGULAR CABS V30/3500 BONUS CAB & CREW CABS STANDARD SPECIFICATIONS

Series	V30/3500 Regular Cab	V30/3500 Bonus/Crew Cab				
Engine						
Base Equip	6.2 Liter, 379 Cu. In. V8 Diesel					
Clutch	-	50 sq. in.				
Air Filter	•	iled-paper Element				
Oil Filter		way Type				
Oil Cooler		ndard				
		luminized				
Exhaust System		n for specific model applications				
Emission Control Systems						
Suspension, Front		ve; Single Stage Leaf Springs				
Capacity	450	00 lb.				
Axle Ratio	4	1.10				
Springs @ Ground	2250	lb. ea.				
Shock Absorbers	32m	ım dia.				
Stabilizer Bar	1.25	5" dia.				
Hubs, Manual Locking	Sta	ndard				
Suspension, Rear	Salisbury Axle: Hypoid Driv	e; Two-stage Multi-leaf Springs				
Axle Capacity	7500 lb.					
Axle Ratio		1.10				
Springs @ Ground) lb. ea.				
Shock Absorbers		nm dia.				
Brakes	Hydraulic; Self-adjusting					
Front		2.5" Rotor				
Rear		3.0" x 3.5"				
Booster		ılic Power				
Parking	Cable to I	Rear Wheels				
Electrical	12 Volt: Ne	gative Ground				
Battery - Freedom Type		CA ◆ ea. @ 0°F.				
-Reserve Capacity.	·	ea. @ 80°F.				
Delcotron Generator		amp.				
Engine Block Reater		ts, 120 volts				
		·				
Frame Section Modulus	6.14	l; 36, 39,000 psi 7.33				
Fuel Tank (nominal capacity)) gal.				
Steering Gear Type	Integral Power					
Transmission	4-Speed Manual (SM 465)					
Shift Location	Floor					
Transfer Case	New Process 205 2-Speed Conventional					
Shift Lever	Single Lever					
PTO Opening	Left Side					
Tires—Front	(2) T T225/	85R16D (8PR)				
-Rear		35R16E (10PR)				
Wheels	(4) Disc	: 16" x 6.5"				

[◆]CCA-Cold Cranking Amps

R10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP

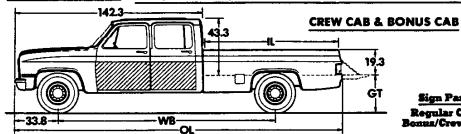


Body Ordering Codes: Regular Cab—E63 Bonus Cab—E63 & YG4 Crew Cab—E63 & AS3

Sign Panel Area (side)
Regular Cab – 22" x 39½"
Bonus/Crew Cab – 22" x 72½"



GASOLINE

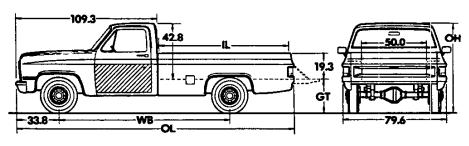

Model	Wheelbase	Body—Payload Weight Distribution*		
	(in)	% Front	% Rear	
Rl	117.5	l	99	
R1-3	131.5	4	96	
R2-3	164.5	3	97	

	Ground Clea	rance (in)★
Series	Front	Rear
R1	7.6	7.3
R2	8.0	7.8
R3	8.0	7.7


^{*}Estimate based on water-level loading.

Model	Engine		Dime	nsions	(in)*		Curb	Weigh	t (lb)	Model	Weigl	ht (1b)*	Payload
Model	No. Cyl.	WB	ш	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	(lb)A
			<u> </u>		R10/1	500	SERIES						
R10703	6	117.5	78.2	193.5	69.2	27.6	1996	1414	3410	2216	1644	3860	1 4 68
R10903	6	131.5	98.1	212.2	69.2	27.6	2071	1494	3565	2317	1698	4015	1311
					R20/2	2500 9	SERIES						
R20903	6	131.5	98.1	212.2	72.2	31.0	2279	1688	3967	2525	1892	4417	2421
R20903 (w/C6P)	8	131.5	98.1	212.2	72.2	31.0	2309	1755	4064	2555	1959	4514	4337
R20943 (Bonus Cab)	8	164.5	98.1	246.4	73.6	32.1	2704	2090	4794	2989	2255	5244	3804
R20943 (Crew Cab)	8	164.5	98.1	246.4	73.6	32.1	2732	2124	4856	3212	2544	5756	3742
				,	R30/:	3500	SERIES						
R30903	8	131.5	98.1	212.2	73.6	33.5	2516	1927	4443	2762	2131	4893	4552
R30943 (Bonus Cab)	8	164.5	98.1	246.4	73.7	32.3	2756	2105	4861	3041	2270	5311	4543
R30943 (Crew Cab)	8	164.5	98.1	246.4	73.7	32.3	2784	2139	4923	3264	2559	5823	4481

 [★]Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.).
 Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.
 ▲With standard equipment.


R10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP

DIESEL

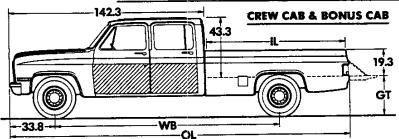

Body Ordering Codes: Regular Cab—E63/B3J Bonus Cab—E63/YG4/B3J Crew Cab—E63/AS3/B3J

Sign Panel Ārea (side)
Regular Cab — 22" x 39%"
Somus/Grew Cab — 22" x 72%"

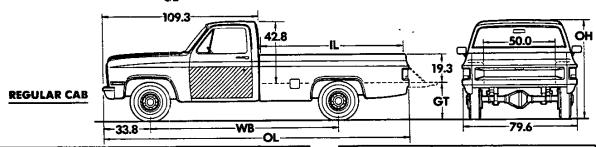

Model	Wheelbase	Body—Payload Weight Distribution*			
223462	(in.)	% Front	% Rear		
RI	117.5	1	99		
R1-3	131.5	4	96		
R2-3	164.5	3	97		

G	Ground Cle	Ground Clearance (in) _s					
Series	Front	Rear					
Rl	7.6	7.3					
R2	8.0	7.8					
R3	8.0	7.7					

^{*}Estimate based on water-level loading.

	Engine		Dime	nsions	(in)∗		Curb	Weigh	t (lb)	Model	Weigh	rt (Ib)*	Payload
Model	No. Cyl.	WB	11L	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	(lb)A
					R10/1	500 S	ERIES						
R10703	8	117.5	78.2	193.5	69.2	27.6	2458	1440	3898	2678	1670	4348	1176
R10903	8	131.5	98.1	212.2	69.2	27.6	2533	1522	4055	2779	1726	4505	1014
	R20/2500 SERIES												
R20903	8	131.5	98.1	212.2	72.2	31.0	2738	1710	4448	2984	1914	4898	1913
R20903 (w/C6P)	8	131.5	98.1	212.2	72.2	31.0	2768	1777	4545	3014	1981	4995	3881
R20943 (Bonus Cab)	8	164.5	98.1	246.4	73.6	32.1	3118	2153	5271	3403	2318	5721	3307
R20943 (Crew Cab)	8	164.5	98.1	246.4	73.6	32.1	3146	2187	5333	3626	2607	6233	3245
*-	R30/3500 SERIES												
R30903	8	131.5	98.1	212.2	73.6	33.5	2909	1979	4888	3155	2183	5338	4088
R30943 (Bonus Cab)	8	164.5	98.1	246.4	73.7	32.3	3158	2144	5302	3443	2309	5752	3654
R30943 (Crew Cab)	8 -	164.5	93.1	246.4	73.7	32.3	3186	2178	5364	3666	2598	6264	3592


[★]Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.).
Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

[▲]With standard equipment.

GASOLINE

V10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP


Body Ordering Codes: Regular Cab—E63 Bonus Cab—E63 & YG4 Crew Cab—E63 & AS3

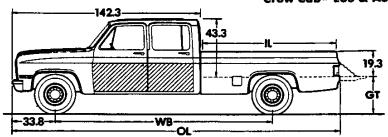

BONUS CAB & CREW CAB

Sign Panel Area (side)
Regular Cab – 22" × 39½"
canus/Crew Cab – 22" × 72½



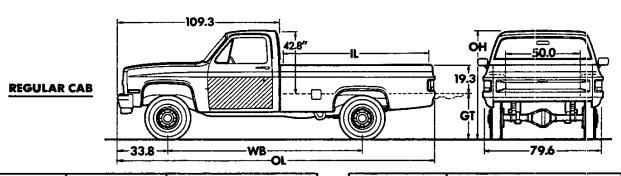

Model	Wheelbase	Body — Payload Weight Distribution*			
	(in)	% Front	% Rear		
Vì	117.5	1	99		
V1-3	131.5	4	96		
V3	164.5	3	97		

Series	Ground Clearance (in)★					
#CIICS	Front	Rear				
Vì	7.4	7.1				
V 2	8.8	7.2				
V 3	8.3	7.8				

^{*}Estimate based on water-level loading.


	Engine		Dimensions (in)*			Curb	Weigh	it (lb)	Model	Weig	ht (lb)*	Payload	
Model	No. Cyl.	WB	11.	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	(lb)A
					V10/	1500 S	ERIES	•	-				
V10703	6	117.5	78.2	193.8	73.4	32.0	2405	1598	4003	2625	1828	4453	2069
V10903	6	131.5	98.1	212.2	73.4	32.0	2493	1688	4181	2739	1892	4631	1898
					V20/	2500 9	SERIES		·				
V20903	8	131.5	98.1	212.2	74.2	33.2	2709	1724	4433	2955	1928	4883	2164
V20903 (w/C6P)	8	131.5	98.1	212.2	74.2	33.2	2717	1905	4622	2963	2109	5072	4001
		•			V30/	3500 9	SERIES		•	•	•		·
V30903	8	131.5	98.1	212.2	76.4	35.7	2924	2000	4924	3170	2204	5374	4039
V30943 (Bonus Cab)	8	164.5	98.1	246.4	76.3	34.6	3166	2173	5339	3451	2338	5789	3833
V30943 (Crew Cab)	8	164.5	98.1	246.4	76.3	34.6	3194	2207	5401	3674	2627	6301	3771

 [★] Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb).
 Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.
 ▲With standard equipment.

V10/1500-30/3500 SERIES FLEETSIDE/WIDESIDE PICKUP


DIESEL

Body Ordering Codes: Regular Cab-E63/B3J Bonus Cab-E63/YG4/B3J Crow Cab-E63/AS3/B3J

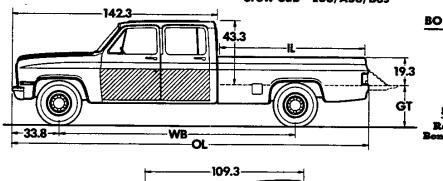


BONUS CAB & CREW CAB

Sign Panel Area (side) Regular Cab — 22" × 39½" onus/Crew Cab — 22" × 72¼"





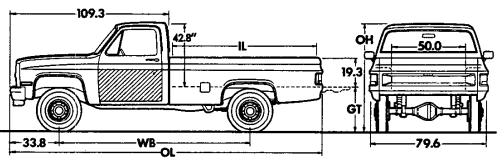

Model	Wheelbase	Body - Payload Weight Distribution				
	(in.)	% Front	% Rear			
Vì	117.5	1	99			
V1-3	131.5	4	96			
V 3	164.5	3	97			

Series	Ground Cle	arance (in)★
- CELLUS	Front	Rear
Vi	7.4	7.1
V2	8.8	7.2
V3	8.3	7.8

^{*}Estimate based on water-level loading.


W-4-1	Engine		Dime	nsions	(in)*		Curb Weight (lb)			Model Weight (lb)*			Pavload
Model No. C	No. Cyl.	WB	п	OL	OH	GT	Front	Rear		Front			(lb)A
	_				V10/	1500 9	SERIES			•			
V10703	8	117.5	78.2	193.8	73.4	32.0	2850	1622	4472	3070	1852	4922	1593
V10903	8	131.5	98.1	212.2	73.4	32.0	2940	1718	4658	3186	1922	5108	1420
		L	<u> </u>	1	V20/	2500	SERIES	,	ı	J			<u> </u>
V20903	8	131.5	98.1	212.2	74.2	33.2	3011	1757	4768	3257	1961	5218	1819
V20903 (w/C6P)	8	131.5	98.1	212.2	74.2	33.2	3019	1937	4956	3265	2141	5406	3599
		l	l	L	V30/:	3500 9	ERIES		l	L			<u></u>
V30903	8	131.5	98.1	212.2	76.4	35.7	3326	2052	5378	3572	2256	5828	3800
V30943 (Bonns Cab)	8	164.5	98.1	246.4	76.3	34.6	3566	2236	5802	3851	2401	6252	3367
V30943 (Crew Cab)	8	164.5	98.1	246.4	76.3	34.6	3594	2270	5864	4074	2690	6764	3305

[★]Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation: ▲With standard equipment.

GASOLINE

STEPSIDE/FENDERSIDE PICKUP

Body Ordering Code—E62

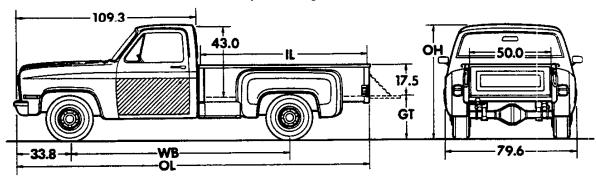

Sign Panel Area (side) 22" x 39"/4"



Model	Wheelbase	Body I Weight Dis	Payload tribution*
	(in.)	% Front	% Rear
R-V1	117.5	1	99
R-V1-2-3	131.5	4	96

	Ground Clea	rance (is:.)★
Series	Front	Rear
Rl	7.5	7.2
R2	8.0	7.8
R3	8.0	7.B
V 1	7.2	7.1
V2	8.8	7.2

^{*}Estimate based on water-level loading.

	Engine		Dime	nsions	(in)∗		Curb Weight (lb)			Model Weight (lb)*			Payload
Model	No. Cyl.	WB	п	OL	OH	GT	Front	Rear	Total	Front	Rear	Total	(lb)▲
					R10/ 1	1500 \$	ERIES	==		·		-	
R10703	6	117.5	78.4	191.1	69.5	27.5	1994	1369	3363	2214	1599	3813	1515
	,				R20/2	2500 9	ERIES		<u> </u>	•			
R20903	6	131.5	98.3	210.8	72.2	30.8	2274	1631	3905	2520	1835	4355	2484
R20903 (W/C6P)	8	131.5	98.3	210.8	72.2	30.8	2304	1698	4002	2550	1902	4452	4399
					R30/3	3500 9	SERIES					,	
R30903	8	131.5	98.3	210.8	73.6	33.8	2511	1870	4381	2757	2074	4831	4615
					V10/	1500 9	SERIES						
V10703	6	117.5	78.4	191.4	73.4	31.8	2403	1553	3956	2623	1783	4406	2116
					V20/2	2500	SERIES	;				·	
V20903	8	131.5	.98.3	211.2	74.2	33.1	2704	1667	4371	2950	1871	4821	2226
V20903 (W/C6P)	8	131.5	98.3	211.2	74.2	33.1	2712	1748	44 60	2958	1952	4910	4063


[★]Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ± 50 lbs. to allow for production build variation.

[▲]With standard equipment.

STEPSIDE/FENDERSIDE PICKUP

Body Ordering Code—E62/B3J

DIESEL

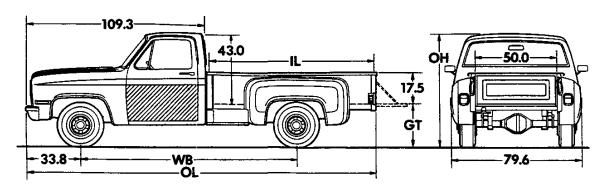

\$ign Panel Ārea (side) 22" x 39%"



Model	Wheelbase	Body — Payload Weight Distribution*					
	(in.)	% Front % Re	% Rear				
R-V1	117.5	1	99				
R-V1-2-3	131.5	4	96				

^{*}Estimate based on water-level loading.

Series	Ground Clear	rance (in.)*
Deries .	Front	Rear
Rl	7.5	7.2
R2	8.0	7.8
R3	8.0	7.8
V 1	7.2	7.1
V 2	8.8	7.2

Model	Engine					Curb Weight (lb)			Model	Weigl	ht (lb)*	Payload	
Model	No. Cyl.	WB	п	OL	OH	GT	Front	Rear	ľ	Front			(і́Ъ)▲
		_	_		R10/	1500 9	ERIES						
R10703	8	117.5	78.4	191.1	69.5	27.5	2456	1395	3851	2676	1625	4301	1223
				- I	R20/2	2500 9	SERIES		<u> </u>				1
R20903	8	131.5	98.3	210.8	72.2	30.8	2728	1653	4381	2974	1857	4831	1975
R20903 (W/C6P)	8	131.5	98.3	210.8	72.2	30.8	2763	1720	4483	3009	1924	4933	3943
			*		R30/3	3500 9	ERIES				_	<u>. </u>	<u> </u>
R30903	8	131.5	98.3	210.8	73.4	33.3	2904	1922	4826	3150	2126	5276	4150
				·	V10/	1500 9	ERIES	' 					
V10703	8	117.5	78.4	191.4	73.4	31.8	2848	1577	4425	3068	1807	4875	1640
				1	V20/	2500 9	SERIES		<u> </u>				!
V20903	8	131.5	98.3	211.2	74.2	33.1	3006	1700	4706	3252	1904	5156	1881
V20903 (W/C6P)	8	131.5	98.3	211.2	74.2	33.1	3014	1781	4795	3260	1985	5245	3661

[★]Dimensions with standard equipment, unloaded. *Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation. **▲**With standard equipment.

POWER TEAMS

ALL STATES EXCEPT CALIFORNIA

R-V10/1500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure thre capacity and availability)

ENGINE		TRANSMISSI		<u> </u>			ILES .	1	GVWR
	3-SP	4SP	AUTO		2.73	3.08	3.42	3.73	
W/NA5 STANDARD I	EMISSION E	QUIPME	NT						
-R10703-R10903		-				-			
LB4 V6 4.3 Liter	MM3	MM4	MXO		_	GQ1	GU6		49/5200
(262 Cu In)-EFI		MM7	† · · · · · · · · · · · · · · · · · · ·	†	_	_	GQ1	%GT4	49/5200
	MM3	MM4	MXO	<u> </u>	_	GQ1	GU6	_	5600
		MM7	<u> </u>			_	GQ1	%GT4	5600
			MX1	1	GQ 1	GU4	_	- 1	ALL
]	MM7				_	_	%GQ1	6100
		MM4			-	GQ1	GU6	-	6100
	MM3		<u> </u>			_	GQ1	l – I	6100
			MX0		_	GQ1	GU6	_	6100
.03 V8 5.0 Liter		MM4/7			_	GQ1	GU6	I - T	N/A 6100
305 Cu In)-EFI			MX1		GQ1	GU4	-		ALL
		MM7			_	_	GQ1		6100
	ŀ	MM4			_	GQ1	GU6		6100
			MXO		GQ1	GU4	-	_	N/A 6100
<u></u>		L	MXO		GQ1	GU4	GU6		6100
05 V8 5.7 Litter		MM4				GQ1	GU6_	_	ALL
350 Cu In)-EFI	j		MXO		GQ1	GU4			N/A 6100
			MXO		GQ1	GU4	GU6		6100
H6 Diesel									
i.2 Liter V8 379 Cu In)(Regs B3J)		MM7	1424	 _ i _ 			GQ1	-	6100
		MM4	MXO			GQ1	GU6	<u> </u>	6100
-V10703-V10903									
B4 V6 4.3 Liter		MM4	MXO		_]	-	GQ1	%GT4	6100
262 Cu in)-EFI		MM7		1	_			%GQ1	6100
LO3 V8 5.0 Liter (305 Cti in)-EFI		MM7			_		GQ1	GT4	6100
		MM4			_	GQ1	GU6	_	6100
			MX0/1		-	GQ1	GU6	GT4	6100
L05 V8 5.7 Liter		MM4				GQ1	GU6	- 1	6100
350 Cu (n)-EF(MXO		į	GQ1	GU6	GT4	6100
H6 Diesel		40044	1010					l i	
.2 Liter V8 379 Cu In)(Regs B3J)	1	MM4	MXO			GQ1	GU6	-	6100
		MM7		<u> </u>			GQ1	<u> </u>	6100
W/NA6 HIGH ALTITU	DE EMISSIC	DN EGUI	PMENT						
-R10703-R10903									
B4 V6 4.3 Liter	MM3	MM4	MX1	1	_		GQ1		ALI
262 Cu In}-EFI		MM7	MXO				GQ1	%GT4	N/A 6100
			MXO			_	GQ1	%GT4	6100
	1	MM7			_			%GQ1	6100
03 V8 5.0 Liter	- -	MM7			-	GQ1	GU6	 ~~~ 	N/A 6100
305 Cu In}EFi	1	MM7					GQ1		6100
	i	MM4	MX0/1			GQ1	GU6	 	ALL
05 V8 5.7 Liter								 	
350 Cu in)-EFI		MM4	MXO			GQ1	GU6	1	ALL
H6 Diesel .2 Liter V8		MM4	4470	1		CO.4	CHA	cr.	
179 Cu in)(Regs B3J)		MM7	MXO	<u> </u>		GQ1	GU6	GT4	6100
	<u> </u>	MM/	l				GQ1	GT4	6100
V10703-V10903									
B4 V6 4.3 Liter	l	MM4	MXO			_	GQ1	%GT4	6100
262 Cu In)-EFI		MM7				_		%GQ1	6100
03 V8 5.0 Liter		MM7					GQ1	GT4	6100
305 Cu in) EFI		MM4				GQ1	GU6	- 1	6100
•	l '	L	MX0/1			GQ1	GU6	GT4	6100
•					-	004	GU6		6100
05 V8 5.7 Litter		MM4			_	GQ1	900		0100
05 V8 5.7 Liter 850 Cu In)-EFI		MM4	MXO			GQ1	GU6	GT4	
		MM4	MXO						6100

POWER TEAMS

CALIFORNIA ONLY

R-V10/1500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TI	RANSMISSIO	N	1	AXI	ES		GVWR
Elitaite	3-SP	4-SP	OTUA	2.73	3.08	3.42	3.73	
N/YF5 CALIFORNIA	EMISSION R	EQUIRE	MENTS-R107	03-R 10903				
-R10703-R10903								
LB4 V6 4.3 Liter	MM3	MM4	MXO		GQ1	GU6	<u> </u>	49/5200
(262 Cu in)-EFI		MM7		_	1	GQ1	GT4	49/5200
	ммз	 	MXO	-	GQ1	GU6		5600
		MM7		_	_	GQ1	%GT4	5600
	ММЗ					GQ1	l – L	6100
	14	MM7	<u> </u>			_	%GQ1	6100
		MM4	MXO		GQ1	GU6		6100
L03 V8 5.0 Liter	 -	1	MXO	GQ1	GU4	_		N/A 6100
(305 Cu In)-EFI	j	ļ	MXO	GQ1	GU4	GU6	7 - 7	6100
<u> </u>		<u> </u>	MXO	GQ1	GU4	_	-	N/A 6100
L05 V8 5.7 Liter (350 Cu In)-EFI	1		MXO	GQ1	GU4	GU6		6100
-V10703-V10903	b		·	-				
LB4 V6 4.3 Liter		MM4	MX0	-	-	GQ1	%GT4	610
(262 Cu In)-EFI		MM7					%GQ1	610
LO3 V8 5.0 Liter (305 Cu In)-EFI			MXO		GQ1	GU6	GT4	610
L05 V8 5.7 Liter (350 Cu In)-EFI			MXO	_	GQ1	GU6	GT4	610

[%]Reqs KC4 Eng. Oil Cooler

ENGINE RATINGS

ALL STATES

SAE Net Ratings	A4.3 Liter	★B4.8 Liter	A5.0 Liter
	262 EFI V6	292 1-bbl L6	305 EFI V8
Net Horsepower Net Torque, lb-ft	160 @ 4000 rpm	115 @ 4000 rpm	170 @ 4000 rpm
	235 @ 2400 rpm	210 @ 800 rpm	255 @ 2400 rpm

SAE Net Ratings	A5.7 Liter	≡5.7 liter	#7.4 Liter
	350 EFI V8	350 EFT V8	454 EF1 V8
Met Horsepower Met Tarque, lb-ft	210 @ 4000 rpm	185 @ 4000 rpm	230 @ 3600 rpm
	300 @ 2800 rpm	295 @ 2400 rpm	385 @ 1600 rpm

SAE Net Ratings	A6.2 Liter 379 V8 Diesel	#6.2 Liter 379 V8 Diesel
Net Horsepower Net Torque, lb-ft	130 @ 3600 rpm 240 @ 2000 rpm	148 @ 3600 rpm 246 @ 2000 rpm

[▲]For models with a GVWR up to 8500 lbs.

For models with a GVWR from 8501 lbs. to 10,000 lbs.

[★]Not available for registration in the State of California.

POWER TEAMS

R-V20/2500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE		RANSMISSION			AX				GVWR
	4-SP	AUTO		#3.23	3.42	3.73	4.10	4.56	
W/NA5 STANDARD ER	VISSION E	QUIPMENT	(w/LL4, LO5 or I	19 (Setisf	ies High	Altitude i	Emission	Requiren	nemts)
-R20903									
LB4 V6 4.3 Liter (262 Cu in)-EFI(N/A C6P)	MM4	MX0/1			GQ1	%GT4			64/7200
L25	MM4	i		_		_	GQ1	HC4	8600
LO3 V8 5.0 Liter	MM4			#GQ1	GÚ6	_			6400
305 Cu In)-EFI N/A C6P)		MX1			GQ1	GT4	_	<u> </u>	6400
(N/A COP)		MXO		#GQ1	GU6	GT4		<u> </u>	6400
	MM4] - [GQ1	ŀ			7200
	•	MX0/1			GQ1	GT4			7200
LO5 V8 5.7 Liter	MM4			#GQ1	GU6	-		-	6400
(350 Cu In)-EFI(N/A C6P)		MXO		#GQ1	GU6	GT4	_		6400
		MXO			601	GT4			7200
	MM4			-	GQ1	_	-	_	7200
L05 V8 5.7 Liter	MM4				GQ1	GT4	GT5	_	8600
(350 Cu in)-EFI(Reqs C6P)		MX1			_		GQ1	HC4	8600
L19 V8 7.4 Liter 454 Cu In) EFI Regs C6P, N41 & UA1)	MM4	MX1			GQ1	GT4	GT5		8600
LH6 Diesel	MM4	- MIA 1		 _ 	GQ1	GT4			6400
R 2 Litter VR	- mm	MXO		#GQ1	GU6		 	 	6400
(379 Cu in)(Reqs B3J) (N/A C6P)	MM4	MAU		#-001	000	GQ1	GT5	 	7200
(N/A C6P)	MM4	MXO		+=-	GQ1		- 615	-	7200
11.4 Pi		MAU		 	301		 	 -	7200
LL4 Diesel (379 Cu In)	MM4			1 - 1	_	GQ1	GT5	_	8600
(379 Cu in) (Regs B3J & C6P)		MX1			_	_	GQ1	HC4	8600
-V20903	·	<u> </u>				<u> </u>			
L25 L6 4.8 Liter	MM4					_	GQ1		8600
(292-1BBL)(Regs C6P)		 		#GQ1	GU6		-	 _ <u> </u>	6600
LO5 V8 5.7 Liter (350 Cu In)-EFI(N/A C6P)	MM4	мхо		#GQ1	GU6	GT4	├─ ─	 	6600
	MM4	MAU		#301	GQ1	GT4	GT5	 	8600
LO5 V8 5.7 Liter (350 Cu In)-EFI(Reqs C6P)	MM4			 -	- 60.1	914	GQ1	 	8600
LH6 Diesel		MX1			_	 	1 601	 	1 3000
R 2 Liter VR	MM4			_ 1		GQ1	GT5	l	6600
(379 Cu In)(Regs B3J) (N/A C6P)		MXO		_	GQ1	GT4	Ţ -	-	6600
LL4 Diesel 6.2 Liter V8							1		<u> </u>
(379 Cu in) (Regs B3J & C6P)	MM4				L - -	GQ1	GT5	<u> </u>	8600
(Regs B3J & C6P)		MX1			_		GQ1	-	8600
-R20943									
L25 L6 4.8 Liter (292-1BBL)	MM4						GQ1	HC4	8600
L05 V8 5.7 Liter	MM4	 		 		GQ1	GT5	 	8600
(350 Cu in)-EF!	100/1017	MX1		+ =	- -	-	GQ1	HC4	8600
L19 V8 7.4 Liter						,		<u> </u>	
(454 Cu In)-EFI (Regs N41 & UA1)	MM4	MX1		↓ -	#GQ1	GT4	GT5	 - -	8600
LL4 Diesel 6.2 Liter V8	MM4					GQ1	GT5	<u> </u>	8600
(379 Cu in)(Reqs B3J)		MX1		_	_	_	G01	HC4	8600

#N/A G80 Locking Differential %Reqs KC4 Eng Oil Cooler

POWER TEAMS ALL STATES EXCEPT CALIFORNIA

R-V20/2500 SERIES

ENGINE	T	RAHSMISSION			AXI	ES			GVW
	4-SP	AUTO		#3.23	3.42	3.73	4.10	4.56	<u> </u>
W/NA6 HIGH ALTITUD	E EMISSIC	N EQUIPMENT							
-R20903									*
LB4 V6 4.3 Liter	MM4	MX1		_		%GQ1			64/7200
262 Cu in)-EFI(N/A C6P)		MXO			-	%GQ1	%GT5		64/7200
LO3 V8 5.0 Liter (305 Cu In)-EFI(N/A C6P)	MM4	MX0/1		_	GQ1	GT4			64/7200
05 V8 5.7 Liter 350 Cu In)-EFI	MM4	MXO			GQ1	GT4			64/7200
H6 Diesel	MM4	MXO		_	GQ1	GT4			6400
6.2 Liter V8 (379 Cu In)	MM4				-	GQ1	GT5		720
(N/A C6P)(Reqs B3J)		MXO			GQ1	GT4			720
LL4 Diesel 6.2 Liter V8	MM4				I	GQ1	GT5	-	860
379 Cu In)(Reqs B3J & C6		MX1			-	1	GQ1	HC4	860
-V20903									
LO5 V8 5.7 Liter	MM4			#GQ1	GU6	-			660
(350 Cu In)-EFI(N/A C6P)		MXO			GQ1	GT4			660
LO5 V8 5.7 Litter	MM4			_	GQ1	GT4	GT5		860
350 Cu In)-EFI(Reqs C6P)		MX1				-	GQ1		860
LH6 Diesel 6.2 Liter V8 (379 Cu In)	MM4			-	_	GQ1	GT5	_	660
(N/A C6P)(Reqs B3J)		MXO			GQ1	GT4			660
LL4 Diesel 6.2 Liter V8 (379 Cu In)	MM4			_		GQ1	GT5		860
(Reqs B3J & C6P)		MX1					GQ1	_	860
_R20943									
LO5 V8 5.7 Liter	MM4					GQ1	GT5		860
(350 Cu In)-EFI		MX1					GQ1	HC4	860
L19 V8 7.4 Liter (454 Cu In)-EF! (Reas N41 & UA1)	MM4	MX1			#GQ1	GT4	GT5		860
LL4 Diesel 6.2 Liter V8	MM4			_	_	GQ1	GT5		860
(379 Cu In)(Req B3J)		MX1	-			_	GQ1	HC4	860

#N/A G80 Locking Differential %Reqs KC4 Eng Oil Cooler

High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES AT HIGH ALTITUDE;
NOT REQUIRED TO SATISFY HIGH ALTITUDE REGULATIONS(REQS LL4 ENG)

R/V PICKUP POWER TEAMS CALIFORNIA ONLY R-V20/2500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANS	MISSION		AX	LES			GVWR
***	4-SP	AUTO	#3.23	3.42	3.73	4.10	4.56	
W/YF5 CALIFORNIA EI	MISSION R	EQUIREMENTS						
R20903						i		
LB4 V6 4.3 Liter (262 Cu In)-EFI(N/A C6P)	MM4	мхо		GQ1	%GT4	– .	_	64/7200
L03 V8 5.0 Liter		MXO	GQ1	GU6	GT4	_		6400
(305 Cu in)-EFI(N/A C6P)		MXO		GQ1	GT4	_	_	7200
L05 V8 5.7 Litter	1	MX0	#GQ1	GU6	GT4	1	-	6400
(350 Cu in)-EFI(N/A C6P)		MXO		GQ1	GT4	-		7200
LO5 V8 5.7 Liter	MM4			GQ1	GT4	GT5	-	8600
(350 Cu In)-EFI(Reqs C6P)		MX1		_	-	GQ1	HC4	8600
L19 V8 7.4 Liter (454 Cu In)-EFI (Regs C6P, N41 & UA?)	MM4	MX1		GQ1	GT4	GT5	_	8600
LL4 Diesel 6.2 Liter V8	MM4				GQ1	GT5		8600
(379 Cu In)(Reqs B3J & C6		MX1	-	_		GQ1	HC4	8600
-V20903		· · · · · · · · · · · · · · · · · · ·		L				
L05 V8 5.7 Liter (350 Cu In)-EFI(Regs C6P)		MXO MX1	GQ1	GU6	GT4	GQ 1	Ξ	6600 8600
L05 V8 5.7 Liter (350 Cu in)-EFI(N/A C6P)	MM4		_	GQ1	GT4	GT5	_	8600
LL4 Diesel 6.2 Liter V8	MM4			-	GQ1	GT5	_	8600
(379 Cu in)(Reqs B3J & C6		MX1		_		GQ1		8600
-R20943		•					<u> </u>	
L05 V8 5.7 Liter	MM4				GQ1	GT5	-	8600
(350 Cu In)-EFI		MX1		_	-	GQ1	HC4	8600
L19 V8 7.4 Liter (454 Cu In)-EFI								
(Regs N41 & UA1)	MM4	MX1	-	#GQ1	GT4	GT5		8600
LL4 Diesel 6.2 Liter V8	MM4		_	_	GQ1	GT5		8600
(379 Cu In)(Reqs B3J)		MX1	_	-	1	GQ1	HC4	8600

#N/A G80 Locking Differential %Reqs KC4 Eng Oil Cooler

GVWR SELECTOR—ALL STATES

GVWR	+623	B (Iba)	Minim	m Equipment Require	d for GVW Rating
Rating (lbs)	†GAWR (lbs)		Tire Capac	rity (lbs ea)	
(1113)	Front	Rear	Front	Rear	Chassis Equipment
			R10/1500 SI	RIES	
●4900	2684	2684	1342	1342	●Standard
+5200	2906	2906	1453	1453	Power Brakes (150)
+5600	2950	3406	1703	1703	HD Rear Springs (G50); Power Brakes (J50)
E6100	★ 3250	3686	1843	1843	Extra Capacity Rear Springs (G51); HD Power Brakes (J55)
			V10/1500 SI	RIES	
6100	3550	3550	1775	1775	Standard

†GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

- Not available on B3J diesel engine models or with power brakes (RPO J50/J55).
- ♦ Not available on diesel engine models.
- Standard on diesel engine models.
- \bigstar Rated 3400 lbs. for diesel engine models.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

R-V10/1500 SERIES

Spare tire to match either front or rear tires must be ordered V10/1500 models require matching front and rear tread

Description	Capacity	Hig	hway	On-01	f Road	
	(lbs ea)	Front	Rear	*Front	Rear	Spare
TUBELESS						-4
♦# P195/75R15 Steel Belted Radial	1342	XAR	YAR	<u> </u>	-	ZAR
♦# P195/75R15 White Wall Steel Belted Radial	1342	XAS	YAS	-	_	ZAS
♦# P205/75R15 Steel Belted Radial	1453	XCE	YCE	_	YIT	ZCE ZJT
◆# P205/75R15 White Wall Steel Belted Radial	1453	XCG	YCG	-		ZCG
• #P225/75R15 Steel Belted Radial	1703	XET	YET	_	_	ZET
♦# P225/75R15 White Wall Steel Belted Radial	1703	XEU	YEU		-	ZEU
P235/75R15 Steel Belted Radial	1843	XFL	YFL _	*XES	YES	ZFL ZES
P235/75R15 White Wall Steel Belted Radial	1843	XFM	YFM	-	<u>-</u>	ZFM
P235/75R15 White Letter Steel Belted Radial	1843	#XFN	#YFN	*XEB	*YEB	#ZFN *ZEB
% LR60-15B White Letter Rayon Belted Radial	1790	XTS	YTS	-	-	ZTS
A31 x 10.50R15LT/B Steel Belted Radial	1775	-	-	*XUY	*YUY	*ZUY
A31 x 10.50R15LT/B White Letter Steel Belted Radial	1775		 	*XUZ	*YUZ	*ZUZ

#Available on R1 models only.

♦Not available with B3J Diesel Equipment.

*Available on V1 models only.

%Available on R10703 only. Requires N67, PF2 or PA6 wheels.

▲Requires N67, N90 or PA6 wheels.

POWER TEAMS

ALL STATES

R-V30/3500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

W/NA5 STANDARD(Satisfies High Altitude Emission Requirements), NA6 HIGH ALTITUDE ● OR YF5 CALIFORNIA EMISSIONS

ENGINE	TR	ANSMISSION		AX	LES		GVWR
	4-SP	AUTO	3.42	3.73	4.10	4.56	
-R30903							
*L25 L6 4.8 Liter	MM4		_	-	GQ1	HC4	9000
(292-1BBL)		MX1		_	-	GQ1	9000
\$L05 V8 5.7 Liter	MM4			GQ1	GT5	HC4	9000
(350 Cu in)-EFI	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	MX1			GQ1	HC4	9000
•	MM4	%MX1			GQ1	HC4	#10000
\$L19 V8 7.4 Liter	MM4	MX1	#GQ1	GT4	GT5	*HC4	9000
(454 Cu in)-EFI (Reqs N41 & UA1)	MM4	%MX1	-	GQ1	GT5	*HC4	#10000
LL4 Diesel 6.2 Liter V8	MM4	MX1		_	GQ1	HC4	9000
(379 Cu In)(Regs B3J)	MM4	%MX1			GQ1	HC4	#10000
	mm4	Ama					
-R30943					GQ1	HC4	9000
**L25 L6 4.8 Liter (292-18BL)	MM4	1444			901	GQ1	9000
<u> </u>	- 	MX1		G01	GT5	HC4	9000
\$L05 V8 5.7 Liter (350 Cu In)-EFI	MM4	HU4		-	GQ1	HC4	9000
(350 Cd III)EFI	l	MX1			GQ1	HC4	9600
	MM4	MX1			GQ1	HC4	#10000
	MM4	%MX1		GT4	GT5	*HC4	90/9600
\$L 19 V8 7.4 Liter (454 Cu In)-EFI	MM4 MM4	MX1 %MX1	#GQ1	GQ1	GT5	*HC4	#10000
(Reqs UA1 & N41) LL4 Diesel				<u> </u>		 	
6.2 Liter V8	MM4	MX1			GQ1	HC4	90/9600
(379 Cu In)(Reqs B3J)	MM4	%MX1		<u> </u>	GQ1	HC4	#10000
-V30903							
*L25 L6 4.8 Liter	MM4	MX1			l _	GQ1	9200
(292-1BBL)	MM4	MAI		GQ1	GT5	HC4	9200
\$L05 V8 5.7 Liter (350 Cu In)-EFI	Mt M 4	MX1		-	GQ1	HC4	9200
1000 ou life.	20004	%MX1			GQ1	HC4	#10000
	MM4			GQ1	GT5	*HC4	9200
\$L19 V8 7.4 Liter (454 Cu In)-EFI (Regs UA1)	MM4 MM4	MX1 %MX1		GQ1	GT5	*HC4	#10000
LL4 Diesel	MM4	MX1			GQ1	HC4	9200
6.2 Liter V8 (379 Cu In)(Regs B3J)	MM4	%MX1			GQ1	HC4	#10000
-V30943		- American		<u> </u>	J		
	MM4	MX1		T	Τ =	GQ1	9200
* L2 5 L6 4.8 Liter (292-18BL)	MM4	MX1		 	 	GQ1	#10000
<u> </u>	MM4	m^1	 -	GQ1	GT5	HC4	9200
\$L05 V8 5.7 Liter (350 Cu In)-EFI	MW4	MX1		 ~~	GQ1	HC4	9200
fore an inter :	1	%MX1		 _ _	GQ1	HC4	#10000
41 40 1/0 2 4 / 2	MM4	MX1		GQ1	GT5	*HC4	9200
\$L19 V8 7.4 Liter (454 Cu In)-EFI (Regs UA1)	MM4	%MX1		GQ1	GT5	*HC4	#10000
LL4 Diesel 6.2 Liter V8	MM4	MX1			GQ1	HC4	9200
(379 Cu In)(Regs B3J)	MM4	%MX1			GQ1	HC4	#10000

%Reqs VO2 Cooler #N/A G80 Locking Differential *W/MX1 Trans and C60 Air Reqs KC4 Cooler

^{**}N/A NA6 High Altitude Emissions. With NA5 Emissions Satisfies
High Altitude Requirements
**With NA5 Emissions Only.

High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES AT HIGH ALTITUDE; NOT REQUIRED TO SATISFY HIGH ALTITUDE REGULATIONS/(REQS LL4 ENG)

GVWR SELECTOR—ALL STATES

		T T	Minimu	m Equipment Required	I for GVW Rating
GVW Rating			Tire Capac	63	
	Front	Rear	Front	Rear	Chassis Equipment
	L	R2	0/2500 SERIES RI	GULAR CAB	
6400	3500	3880	1940	1940	Standard
7200	3500	4630	1940	2315	HD Rear Springs (G50)
	<u> </u>	R20/	2500/C6P SERIES	REGULAR CAB	
8600	3800	6000	2623	3042	Standard
		V2	0/2500 SERIES RI	GULAR CAB	
6600	3700	3880	1940	1940	Standard
	<u>. </u>	V20/	2500/C6P SERIES	REGULAR CAB	
8600	3700	6000	2623	3042	Standard
	<u></u>	R20/25	00 SERIES BONU	S AND CREW CAR	3
8600	3800	6000	2623	3042	Standard

[†]GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

R-V20/2500 SERIES

Spare tire to match either front or rear tires is available at extra cost V20/2500 models require matching front and rear tread

	Capacity	Higl	hway	On-0£	Road	Spare
Description	(lbs ea)	Front	Rear	*Front	Rear	- Optile
TUBELESS (Requires LB4, LO3, L	H6 or LO5 engine.)					
7.50R-16D Steel Belted Radial	2440	XWY	YWY - -	*xwx	YWX #YWX	ZWY ZWX #ZWY
LT 215/85R16C Steel Belted Radial	1940	XYJ	YYJ	_		ZYJ
LT 215/85R16C Steel Belted Radial	1940	XYJ	-	_	-	
LT 215/85R16D Steel Belted Radial	2315	-	YYK - -	<u>-</u> -	#YYL #YYL	ZYK #ZYL #ZYK
LT 215/85R16D Steel Belted Radial	2315	XYK	YYK - -	*XYL	YYL #YYL	ZYK ZYL #ŻYK
LT 235/85R16D Steel Belted Radial	2623	XYM	YYM	_		ZYM
LT 235/85R16E Steel Belted Radial	3042	XYN	YYN	_		ZYN
TUBELESS (Requires LI9, LO5 or	LL4 engine.)				.,	
LT 235/85R16D Steel Belted Radial	2623	MYX	-	-	_	
LT 235/85R16E Steel Belted Radial	3042		YYN		#YYT #YYT	ZYN ZYT
LT 235/85R16E Steel Belted Radial	3042	XYN	YYN	*XYT	YYT #YYT	ZYN ZYT #ZYN

^{*}On-Off road front tires available on V2 models only. #Not available on V2 models.

GVWR SELECTOR—ALL STATES

GVW	†GAW	R (lbs)	Minim	um Equipment Require	d for GVW Rating
Rating (lbs)			Tire Capa	city (lbs ea)	
(1113)	Front	Rear	Front	Rear	Chassis Equipment
		R3(0/3500 SERIES R	EGULAR CAB	
9000	3800	6084	2623	3042	Standard
*10,000	3800	7056	1940	1764 (Duals)	Dual Rear Wheel Provisions (R05
		R30/3500	SERIES BONUS	CAB AND CREW C	
9000	4000	6084	2623	3042	Standard
9600	4000	6084	2623	3042	Camper Special Chassis Equipment (Z81)
10,000	3880	7500	1940	2105 (Duals)	Dual Rear Wheel Provisions (R05
		V3	0/3500 SERIES R	EGULAR CAB	
9200	4500	6084	2623	3042	Standard
10,000	4500	7500	2315	2105 (Duals)	Dual Rear Wheel Provisions (R05
_		V30/3500	SERIES BONUS	CAB AND CREW C	
9200	4500	6084	2623	3042	Standard
10,000	4500	7500	2315	2105 (Duals)	Dual Rear Wheel Provisions (R05

[†]GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

R-V30/3500 SERIES

Spare tire to match either front or rear tires is available at extra cost V30/3500 models require matching front and rear tread

	Capa (lbs e	each)		Highway			On-Off Roa	d	
Description	Front/ Single Rear	Dual Rear	Front	Single Rear	Dual Rear	*Front	Single Rear	Dual Rear	Spare
TUBELESS Steel 1	Belted Radia	i	<u></u>	L, j		<u> </u>	<u> </u>		
+LT215/85R16C	1940	1764	XYJ	_	YY]	_	Τ =		ZYJ
#LT215/85R16C	1940	_	XYJ				<u> </u>	 	
#LT215/85R16D	_	2105	_	_	YYK	_	-	YYL YYL	ZYK ZYL ZYK
LT215/85R16D	2315	2105	XYK	<u>-</u> -	YYK	*XYL	=	YYL #YYL	ZYK ZYL #ZYK
LT235/85R16D	2623	_	XYM				 		H.511
LT235/85R16E	3042	_	XYN	YYN		- *XYT	tYYT	 	ZYN t:ZYT
TUBE-TYPE Nylo	n				-		1 1 2 2 2	L	11211
◆7.50-16C	2060	1815	XPB 	- - -	YPB -	 - 		YPC YPC	ZPB ZPC ZPB
#7.50-16C	2060		XPB						
#7.50-16D	-	2140	_ 	- - -	YPF - -	<u>-</u> -		YFG YFG	ZPF ZPG ZPF
7.50-16D	2440	2140	XPF - -	-	YPF - -	*XPG	_ _ _	YPG #YFG	ZPF ZPG #ZPF

^{*}Fleetside/Wideside Pickups only.

[#]R3 models only.
*On-Off road front tires available on V3 models only.
†V3 models only.
•R30903 models only.

NOTES

THE FOLLOWING EQUIPMENT IS STANDARD ON DIESEL ENGINE MODELS (ALSO SEE STANDARD SPECIFICATIONS PAGES)

- Low Coolant Sensor
- Poly-wrapped Paper Element Air Cleaner
- Auxiliary Engine Oil Cooler provided with 4.56 ratio rear axle (in addition to cooler in radiator tank)
- Power Steering
- Engine Block Heater (600 watts, 120 volts)
- Water/fuel separator unit which incorporates a water sensor and sending unit, a fuel filter, a fuel heater and water drain capability
- Hydraulic Power-assisted Brakes
- K81 66-amp Generator
- Engine Oil Cooler (located in radiator tank)
- Dual 540 Cold Cranking Amp/115 min. Reserve Capacity Batteries
- HD Radiator
- Dual Exhaust System
- Additional Insulation:
 - -Cab-to-fender insulators
 - -Fiberglass hood insulator
 - -Fiberglass engine compartment firewall insulator
 - —Cowl side spray-on deadener
 - Driver compartment dash mat with increased mastic layer
 - -Resinated cotton and mastic floor insulation
 - -Full cowl interior trim panels with resinated cotton insulation
 - Vinyl-coated rubber floor mat for regular cab models
- Warning Lights: Glow Plugs, Water-in-fuel (or fuel filter), and Low Coolant
- Diesel Engine Identification:
 - -Hood ornament
 - -Fender nameplates
 - Tailgate nameplate (Fleetside/Wideside models only)
 - -"Diesel Fuel Only" filler cap and label

R-V PICKUP 2-WHEEL DRIVE (4900-lb - 10,000-lb GVW) 4-WHEEL DRIVE (6100-lb - 10,000-lb GVW)

1987 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with initial shipments of 1987 model motor vehicles

Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price#	Group Numbe
(All models have regular cal	h unless otherwise ind	icated)					
6-Cylinder 4.3 Liter	(262 Cu. In.) E.F.I	. V6 Gasoline E	naine-Enair	ne Ordei	ring Cod	e LB4	
R10 Series 2-Wheel Dr					_		
Stepside (6 1/2-ft)		E62	117.5*	-N.A.	8651.00	865 1.00	17
Fleetside (6 1/2-ft)		E63	117.5*	N.A.	8503.00	8503.00	17
Fleetside (8-ft)	CR10903	E63	131.5"	N.A.	8687.00	8687.00	17
R20 Series 2-Wheel Dr	ive						
Stepside (8-ft)	CR20903	E62	131.5*	N.A.	10077.00	10077.00	17
Fleetside (8-ft)	CR20903	E63	131.5*	N.A.	9929.00	9929.00	17
V10 Series 4-Wheel Dr	ive						
Stepside (6 1/2-ft)		E62	117.5*		11357.00	11357.00	17
Fleetside (6 1/2-ft)		E63	117.5*		11209.00	11209.00	17
Fleetside (8-ft)	CV10903	E63	131.5*		11396.00	11396.00	17
8-Cylinder 5.7 Liter	(350 Cu. In.) E.F.I	. V8 Gasoline E	Engine-Engir	ne Ordei	ring Cod	le L05	
R20 Series H.D. Chassi		 			•		
Stepside (8-ft)		E62 & C6P	131.5*	3.78	11494.00	11497.78	17
Fleetside (8-ft)		E63 & C6P	131.5*	3.78	11347.00	11350.78	17
R20 Series 2-Wheel Dr							
Bonus Cab		E63 & YG4	164.5*	3.78	12471.00	12474.78	17
Crew Cab		E63 & AS3	164.5"	3.78	12838.00	12841.78	17
R30 Series 2-Wheel Dr		-00 2 700		•			
		E62	131.5*	3.78	11708.Q0	11711.78	17
Stepside (8-ft)		E63	131.5	3.78	11561.00	11564.78	17
Fleetside (8-ft)		E63 & YG4	164.5"	3.78	12660.00	12663.78	17
Crew Cab		E63 & AS3	164.5"	3.78	13030.00	13033.78	17
	• • • • • • • • • • • • • • • • • • • •	-40 @ 7.00		0			
V20 Series H.D. Chassi Stepside (8-ft)		E62 & C6P	131.5"	3.78	13378.00	13381.78	17
Fleetside (8-ft)		E63 & C6P	131.5"	3.78	13229.00	13232.78	17
· · · · · · · · · · · · · · · · · · ·		200 @ CO1	101.0	0.75	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
V30 Series 4-Wheel Dr		E63	131.5*	3.78	14421.00	14424.78	17
Fleetside (8-ft)	7.7.	EB3 & YG4	164.5*	3.78	15395.00	15398.78	17
Crew Cab		E63 & AS3	164.5*	3.78	15768.00	15771.78	17
		-03 G A33	104.0	0.70	,		
V20 Series 4-Wheel Dr		E62	131.5"	N.A.	12369.00	12369.00	17
Stepside (8-ft)		E63	131.5*		12219.00	12219.00	17
Fleetside (8-ft)							••
8-Cylinder 6.2 Liter	=	DIAZAL AO EUS	me-EnAme A	Dinetini	, Code L	.,,,	
R10 Series 2-Wheel Dr							
Stepside (6 1/2-ft)		E62 & B3J	117.5*		11842.00	11842.00	17 17
Fleetside (6 1/2-ft)		E63 & B3J	117.5*	N.A.	11695.00	11695.00	17
Fleetside (8-ft)		E63 & B3J	131.5*	N.A.	11878.00	11878.00	17
R20 Series 2-Wheel Di							45
Stepside (8-ft)		E62 & B3J	131.5*		12722.00	12722.00	17
Fleetside (8-ft)		E63 & B3J	131.5*	N.A.	12574.00	12574.00	17
V10 Series 4-Wheel Di						4	
Stepside (6 1/2-ft)		£62 & B3J	117.5*	N.A.	13778.00	13778.00	17
Fleetside (6 1/2-ft)		E63 & B3J	117.5"	N.A.	13628.00	13628.00	17 17
Fleetside (8-ft)	CV10903	E63 & B3J	131.5*	N.A.	13816.00	13816.00	17
V20 Series 4-Wheel Di					_		4=
Stepside (8-ft)		E62 & B3J	131.5*	N.A.	14418.00	14418.00	17
Fleetside (8-ft)	CV20903	E63 & B3J	131.5*	N.A.	14267.00	14267.00	17

[★] Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or special items or services.

MODELS CONTINUED ON FOLLOWING PAGE

Published: FEBRUARY, 1987

[♠] Refer to Power Team Chart for California Emission Certification Requirements.

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

1987 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with initial shipments of 1987 model motor vehicles

Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mir's Suggested Retail Price±	Group Numbe
8-Cylinder 6.2 Liter (37	'9 Cu. In.) H.E	D. Diesel V8 Engin	e-Engine (Ordering	code L	L4	
R20 Series H.D. Chassis 2-					,		
Stepside (8-ft)	CR20903	E62 & C6P & B3J	131.5-	3.78	12882.00	12885.78	17
Fleetside (8-ft)	CR20903	E63 & C6P & B3J	131.5-	3.78	12735.00	12738.78	17
R20 Series 2-Wheel Drive							
Bonus Cab	CR20943	E63 & YG4 & B3J	164.5-	3.78	13689.00	13692.78	17
Crew Cab	CR20943	E63 & AS3 & B3J	164.5-	3.78	14056.00	14059.78	17
R30 Series 2-Wheel Drive	0.1200-10	200 2 7.00 2 200		•			•
Stepside (8-ft)	CR30903	E62 & B3J	131.5-	3.78	13039.00	13042.78	17
Fleetside (8-ft)	CR30903	E63 & B3J	131.5-	3.78	12892.00	12895.78	17
Bonus Cab	CR30943	E63 & YG4 & B3J	164.5"	3.78	13781.00	13784.78	17
Crew Cab	CR30943	E63 & AS3 & B3J	164.5*	3.78	14262.00	14265.78	17
V20 Series H.D. Chassis 4-			•				
Stepside (8-ft)	CV20903	E62 & C6P & B3J	131.5*	3.78	14471.00	14474.78	17
Fleetside (8-ft)	CV20903	E63 & C6P & B3J	131.5*	3.78	14322.00	14325.78	17
	CTEUSUS	203 & 007 & 230	101.0	4.70	14022.00		
V30 Series 4-Wheel Drive	O1/00000	E63 6 83 1	131.5*	3.78	15302.00	15305.78	17
Fleetside (8-ft)	CV30903 CV30943	E63 & B3J E63 & YG4 & B3J	164.5"	3.78	16276.00	16279.78	17
Bonus Cab	CV30943 CV30943	E63 & AS3 & B3J	164.5	3.78	16650.00	16653.78	17

Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or special items or services.

Refer to Power Team Chart for California Emission Certification Requirements.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ◊
Scottsdale/High Sierra: (See Interior and Exterior Color Selection Charts) Available only when deluxe cloth or custom vinyl seats are specified on Regular Cab. Includes bright side marker lamp bezels, nameplates on front fenders and instrument panel, U37 Cigarette Lighter, dual horns, cab back insulation, C91 Dome Lamp, special insulation and color-keyed vinyl coated floor mat. Stepside only. Also includes plastic door trim panels Fleetside only. Also includes bright taillight trim. Without R05 Dual Rear Wheels.	Z 62	N.A.	264.00	264.00
Regular Cab only. Also includes plastic door trim panels Without YJ6 Value Decor Package. Also includes B84 Black Side Moldings. With YJ6 Value Decor Package Bonus Cab only Crew Cab only	262 262 262 262 262	N.A. N.A. N.A. N.A.	391.00 269.00 351.00 360.00	391.00 269.00 351.00 360.00
With RO5 Dual Rear Wheels. Regular Cab only. Also includes plastic door trim panels	Z62 Z62 Z62	N.A. N.A. N.A.	274.00 233.00 243.00	274.00 233.00 243.00
Silverado/Sierra Classic: Available only when custom cloth or custom vinyl seats are specified. Includes bright side marker lamp bezels, nameplates on front fenders, color-keyed carpeting for front seat area, plastic door trim panels with storage pockets and bright brushed-finish accents. V22 Deluxe Front Appearance, nameplate on deluxe instrument panel, U37 Cigarette Lighter, visor vanity mirror, custom steering wheel, headliner, C91 Dome Lamp, cab back insulation, Z53 Voltmeter, Temperature and Oil Pressure Gages, dual horns and special insulation. Stepside only. Also includes cab back panel applique molding Regular Cab only	YE9	N.A.	709.00	709.00

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price ◊
iliverado/Sierra Classic: (Continued)				
Fleetside only. Also includes bright taillight trim.				
Without R05 Dual Rear Wheels.				
Regular Cab only.				
Without ZY5 Exterior Decor Package. Also includes cab back panel				
applique molding, YG3 Deluxe Molding Package and tailgate	VEO	N.A.	904.00	904.00
applique With ZY5 Exterior Decor Package	YE9 YE9	N.A.	873.00	873.00
Bonus Cab only.	120	11.2.	0,0.00	
Without ZY5 Exterior Decor Package. Also includes cab back panel				
applique molding	YE9	N.A.	986.00	986.00
With ZY5 Exterior Decor Package	YE9	N.A.	955.00	955.00
Crew Cab only. Also includes rear seat area carpeting				
Without ZY5 Exterior Decor Package. Also includes cab back panel	VEO	A1 A	1073.00	1073.00
applique molding	YE9 YE9	N.A. N.A.	1042.00	1042.0
With ZY5 Exterior Decor Package	1 63	14.6.	10-12.00	1042.0
Regular Cab only.				
Without ZY9 Big Dooley Special Two-Tone Paint. Also includes cab				
back panel applique molding	YE9	N.A.	739.00	739.00
With ZY9 Big Dooley Special Two-Tone Paint	YE9	N.A.	688.00	688.0
Bonus Cab only. Also includes cab back insulation				
Without ZY9 Big Dooley Special Two-Tone Paint. Also includes cab	VEO	NI A	822.00	822.0
back penel applique molding	YE9 YE9	N.A. N.A.	770.00	770.0
With ZY9 Big Dooley Special Two-Tone Paint	159	N.A.	,,,,,,,,	7,0.0
insulation				
Without ZY9 Big Dooley Special Two-Tone Paint. Also includes cab				
back panel applique molding	YE9	N.A.	909.00	909.00
With ZY9 Big Dooley Special Two-Tone Paint	YE9	N.A.	863.00	863.00
Seat Trim: (See Interior and Exterior Color Selection Chart for availability and				
ordering information).				
V**1 Vinyl Bench		NO A	DDITIONAL C	HAHGE
C**1 Deluxe Cloth Bench. Regular Cab only. Not available when YE9 is specified		N.A.	71.00	71.0
Without Z62 With Z62		N.A.	18.00	18.0
L**1 Custom Cloth Bench.		****		
Regular Cab only. Available only when YE9 is specified		NO A	DDITIONAL (HARGE
Bonus Cab only. Available only when Z62 or YE9 is specified.				
With Z62	• • •	N.A.	52.00	52.00
With YE9	• • •	NO A	DDITIONAL (HANGE
Crew Cab only. Available only when Z62 or YE9 is specified.		N.A.	106.00	106.0
With Z62 With YE9			DDITIONAL (_
X**1 Custom Vinvi Bench	•••	110 A	DDIIIONAL .	,,,,,,,,,
Regular Cab only				
Without Z62 or YE9		N.A.	52.00	52.0
With Z62 or YE9		NO A	DDITIONAL (CHARGE
Bonus Cab only.				
With Z62	• • •	N.A.	52.00	52.0
With YE9	• • • •	NU A	DDITIONAL (HANGE
Crew Cab only. With Z62		N.A.	106.00	106.0
With YE9	•••		DDITIONAL (
	• • • •	.,		
Paints, Exterior: (See Interior and Exterior Color Selection Chart for ordering information and paint application).				
Information and paint application). Solid	ZY1	NO A	DDITIONAL (CHARGE
Conventional Two-Tone.	- ··			
Regular Cab only.				
Without YE9. Includes cab back panel applique moldings	ZY2	N.A.	76.00	76.0
With YE9	ZY2	N.A.	45.00	45.0
Bonus Cab or Crew Cab only.	702	A1 A	94.00	94.0
Without YE9. Includes cab back panel applique moldings	ZY2 ZY2	N.A. N.A.	64.00	64.0
With YE9	414	14.64.	UT.UU	U-7.0

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with initial shipments of 1987 model motor vehicles

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price♦
Paints, Exterior: (Continued)				
Special Two-Tone. Fleetside only.				
Regular Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY3	N.A.	345.00	345.00
With Z62	ZY3	N.A. N.A.	210.00 180.00	210.00 180.00
With YE9 Bonus Cab or Crew Cab only.	ZY3	n.a.	100.00	100.00
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY3	N.A.	352.00	352.00
With Z62	ZY3	N.A.	216.00	216.00
With YE9	ZY3	N.A.	186.00	186.00
Deluxe Two-Tone. Fleetside only.				
Regular Cab only.	70/4	NI A	391.00	391.00
Without Z62 or YE9, Includes YG1 Custom Molding Package	ZY4 ZY4	N.A. N.A.	255.00	255.00
With Z62	ZY4	N.A.	194.00	194.00
Bonus Cab or Crew Cab only.	.	14.54.	104.00	,,,,,,
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY4	N.A.	407.00	407.00
With Z62	ZY4	N.A.	270.00	270.00
With YE9	ZY4	N.A.	211.00	211.00
Exterior Decor Package. Fleetside only. Not available when R05 Dual Rear Wheels is specified. Includes dual-tone body side and rear decal striping. Also includes hood ornament when B3J Diesel Equipment is not specified. Regular Cab only				
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY5	N.A.	608.00	608.00
With Z62	ZY5	N.A.	471.00	471.00
With YE9	ZY5	N.A.	442.00	442.00
Bonus Cab or Crew Cab only.				
Without Z62 or YE9. Includes YG1 Custom Molding Package	ZY5	N.A.	608.00	608.00
With Z62 With YE9	ZY5 ZY5	N.A. N.A.	471.00 442.00	471.00 442.00
Special Big Dooley Two-Tone. Fleetside only. Available only when R05 Dual Rear Wheels are specified. Includes dual-tone body side and rear decal striping. Also includes hood ornament when B3J Diesel Equipment is not specified. Without Z62	ZY9	N.A.	469.00	469.00
With Z62	ZY9	N.A.	450.00	450.00
Emission Systems: Dealer Note - One of the following emission options must be specified. (See Power Teams Chart for availability and complete specifications). California Emission Requirements. Includes all testing, equipment and/or certification necessary for registration in the State of California. Not available when NAS High Altitude Emissions or L25 4.8 Liter Engine is specified	YF5	N.A.	99.00	99.00
High Altitude Emission Equipment. Not available when L 19 7.4 Liter Engine, NA5 Standard or YF5 Celifornia Emissions is specified.	NA6		DDITIONAL C	HARGE
Standard Emission Equipment. Not available when NA6 High Altitude or YF5				
California Emissions are specified	NA5	NO A	DDITIONAL (CHARGE
Engines: (See Power Teams Chart for availability and complete specifications).				
Gasoline.				
4.3 Liter (262 Cu. In.) E.F.I. V6. R-V1 or R2 Series without C6P H.D. Chessis	LB4		DDITIONAL (
4.8 Liter (292 Cu. In.) 1 BBL L6. R-V 2 Series with C6P Chassis or R-V3 Series.	L25 L03	N.A. N.A.	(-710.00) 495.00	(-710.00) 495.00
5.0 Liter (305 Cu. In.) E.F.I. V8. R-V1 or R2 Series without C6P H.D. Chassis. 5.7 Liter (350 Cu. In.) E.F.I. V8. Standard on C6P H.D. Chassis, V2 Regular Cab, R2 Bonus and Crew Cab or R-V3 Series. Available on R-V1 or R2 Series	LU3	N.A.		
without C6P H.D. Chassis	L05	N.A.	740.00	740.00
R2-3 Series only. Available only when N41 Power Steering is specified. R2 Regular Cab also available only when C6P H.D. Chassis is specified Diesel.	L19	N.A.	385.00	385.00
6.2 Liter (379 Cu. In.) L.D. V8 Diesel. R-V1-2 Regular Cab only. Not available when C6P H.D. Chassis or YF5 California Emission Requirements is specified. Available only when B3J Diesel Equipment is specified.				
R-V1-2 Series only	LH6	NO A	DDITIONAL (CHARGE
			DDITIONAL (

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that
it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

Published: FEBRUARY, 1987

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price \diamondsuit
Fransmissions: (See Power Teams Chart for availability and complete specifications).				
3-Speed Automatic. R1 Series available only when LO3 5.0 Liter or LB4 4.3 Liter			ene na	ECE 00
Engine is specified	MX1	N.A.	565.00 DDITIONAL CH	565.00
3-Speed Manual. R1 Series only	ммз	AU AI	DDITIONAL CI	MIGE
4-Speed Manual. Standard on R-V2-3 Series. Standard on V1 Series R1 Series without B3J Diesel Equipment	MM4	N.A.	220.00	220.00
R1 Series with B3J Diesel Equipment	MM4	NO AL	DDITIONAL CH	<i>iarge</i>
1-Speed Manual with Overdrive. Standard on R1 Series when B3J Diesel				
Equipment is specified.			242.00	2100
R1 Series when gasoline engines are specified	MM7	N.A.	310.00 85.00	310.00 85.00
V1 Series only	MM7	N.A.	65.00	65.0
4-Speed Automatic with Overdrive. Not available when C6P H.D. Chassis is	MXO	N.A.	735.00	735.00
specified. R-V1-2 Regular Cab only.	MIXO	1415-41	,,,,,,,	
Axies, Rear: (See Power Teams Chart for option number selection, availability				
and complete specifications) Optional Ratio		N.A.	38.00	38.0
Locking Differential	G80	N.A.	252.00	252.0
Fires: (See Tire Charts for Tire Availability)				
Spare tire carrier included when spare tire is specified on R-V-2-3 series				
All rim sizes are 6.00° except when N67, N90, PF2 or PA6 Wheels are specified				
on R-V1 Series. All rim sizes are 6.50° on R-V2 Series or R-V3 Series without R05 Dual Rear				
Wheels.				
All rim sizes are 6.00° on R-V3 Series with R05 Dual Rear Wheels.				
Dealer Note: When dual rear tires are specified, RO5 Dual Rear Wheels will be THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE.	D ON THE INV	DICE SEPARAT	ELY.	
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs)	D ON THE INV	DICE SEPARAT	ELY.	
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified.	D ON THE INV	DICE SEPARAT		HARGE
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard)	D ON THE INVO	DICE SEPARAT NO A	DDITIONAL C	
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard)	D ON THE INV	NO A NO A		HARGE
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall	D ON THE INV tion. XAR YAR	NO A NO A	DDITIONAL C DDITIONAL C	HARGE
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs)	D ON THE INV tion. XAR YAR	NO A NO A	DDITIONAL C DDITIONAL C	HARGE HARGE
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall	D ON THE INV tion. XAR YAR	NO A NO A NO A NO A	DDITIONAL C DDITIONAL C DDITIONAL C 26.00	HARGE HARGE ~ 26.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified.	XAR YAR ZAR XAS YAS	NO A NO A NO A NO A N.C. N.C.	DDITIONAL C DDITIONAL C DDITIONAL C 26.00 26.00	HARGE HARGE 26.0 26.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare	XAR YAR ZAR XAS	NO A NO A NO A NO A	DDITIONAL C DDITIONAL C DDITIONAL C 26.00	HARGE HARGE 26.0 26.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs)	XAR YAR ZAR XAS YAS	NO A NO A NO A NO A N.C. N.C.	DDITIONAL C DDITIONAL C DDITIONAL C 26.00 26.00	HARGE HARGE 26.0 26.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Front Front Front Front	XAR YAR ZAR XAS YAS	NO A NO A NO A N.C. N.C. N.C.	DDITIONAL C DDITIONAL C DDITIONAL C 26.00 26.00 13.00	HARGE HARGE 26.0 26.0 13.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment	XAR YAR ZAR XAS YAS ZAS XCE	NO A NO A NO A N.C. N.C. N.C.	DDITIONAL C DDITIONAL C DDITIONAL C 26.00 26.00 13.00	#ARGE HARGE 26.0 26.0 13.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only.	XAR YAR ZAR XAS XAS XAS ZAS	NO A NO A NO A N.C. N.C. N.C.	DDITIONAL C DDITIONAL C DDITIONAL C 26.00 26.00 13.00	#ARGE HARGE 26.0 26.0 13.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment Rear	XAR YAR ZAR XAS YAS ZAS XCE XCE	NO A NO A NO A N.C. N.C. N.C. N.C.	DDITIONAL CO DDITIONAL CO DDITIONAL CO 26.00 26.00 13.00	#ARGE #ARGE 26.0 26.0 13.0 #ARGE
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment Rear Without B3J Diesel Equipment	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE	NO A NO A NO A N.C. N.C. N.C. N.C.	DDITIONAL C DDITIONAL C DDITIONAL C 26.00 26.00 13.00 24.00 DDITIONAL C	#ARGE HARGE 26.0 26.0 13.0 HARGE 24.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment	XAR YAR ZAR XAS YAS ZAS XCE XCE	NO A NO A NO A N.C. N.C. N.C. N.C.	DDITIONAL CO DDITIONAL CO DDITIONAL CO 26.00 26.00 13.00	#ARGE 26.0 26.0 13.0 HARGE 24.0
FHIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec P195/75R15 All Seasons Steel Belted Radial Ply Blackwall Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment Spare	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE YCE	NO A NO A NO A N.C. N.C. N.C. N.C.	DDITIONAL C DDITIONAL C DDITIONAL C 26.00 26.00 13.00 24.00 DDITIONAL C	26.0 26.0 13.0 24.0 HARGE
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment Spare Without B3J Diesel Equipment With B3J Diesel Equipment	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE	NO A NO A NO A N.C. N.C. N.C. N.C. N.C. NO A NO A NO A	DDITIONAL CO DDITIONAL CO DDITIONAL CO 26.00 26.00 13.00 24.00 DDITIONAL CO DDITIONAL CO	######################################
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment Spare Without B3J Diesel Equipment With B3J Diesel Equipment Spare	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE YCE YCE ZCE	NO A NO A N.C. N.C. N.C. N.C. N.C. N.C.	DDITIONAL CODDITIONAL CO	######################################
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front. Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment Rear Without B3J Diesel Equipment With B3J Diesel Equipment P205/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1453-lbs) R1 Series only. Front	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE YCE ZCE ZCE	NO A NO A NO A N.C. N.C. N.C. N.C. N.C. N.C.	DDITIONAL CODDITIONAL CO	26.0 26.0 26.0 13.0 HARGE 24.0 HARGE 12.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment Rear Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment P205/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment P205/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE YCE ZCE ZCE XCG	NO A NO A NO A N.C. N.C. N.C. N.C. NO A N.C. NO A N.C.	DDITIONAL CODDITIONAL CO	26.0 26.0 13.0 24.0 HARGE 24.0 HARGE 12.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment Spare Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment P205/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment Without B3J Diesel Equipment	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE YCE ZCE ZCE	NO A NO A NO A N.C. N.C. N.C. N.C. N.C. N.C.	DDITIONAL CODDITIONAL CO	######################################
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment Rear Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment P205/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE YCE ZCE ZCE XCG XCG	NO A NO A NO A N.C. N.C. N.C. N.C. NO A N.C. NO A N.C.	DDITIONAL CODDITIONAL CO	26.0 26.0 13.0 24.0 HARGE 24.0 HARGE 12.0
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment Without B3J Diesel Equipment With B3J Diesel Equipment Rear Without B3J Diesel Equipment	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE YCE ZCE ZCE XCG	NO A NO A NO A N.C. N.C. N.C. N.C. N.C. NO A	DDITIONAL CODDITIONAL CODDI	######################################
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment Spare Without B3J Diesel Equipment With B3J Diesel Equipment With B3J Diesel Equipment P205/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment Spare	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE YCE ZCE ZCE XCG XCG YCG YCG	NO A NO A N.C. N.C. N.C. N.C. N.C. N.C. N.C. N.C	DDITIONAL CODDITIONAL CODDI	######################################
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTE. For complete specifications and ordering information, see "OTHER OPTIONS" Sec TUBELESS P195/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front (Standard) Rear (Standard) Spare (Standard) P195/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1342-lbs) R1 Series only. Not available when B3J Diesel Equipment is specified. Front Rear Spare P205/75R15 All Seasons Steel Belted Radial Ply Blackwall (Maximum Capacity 1453-lbs) R1 Series only. Front Without B3J Diesel Equipment With B3J Diesel Equipment Without B3J Diesel Equipment With B3J Diesel Equipment Rear Without B3J Diesel Equipment	XAR YAR ZAR XAS YAS ZAS XCE XCE YCE YCE ZCE ZCE XCG XCG YCG YCG	NO A NO A N.C. N.C. N.C. N.C. N.C. N.C. N.C. N.C	DDITIONAL CODDITIONAL CODDITIO	######################################

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price &
				······································
Fires: (Continued)				
P205/75R15 On-Off Road Steel Belted Radial Ply Blackwall				
(Maximum Capacity 1453-lbs) R1 Series only				
Rear				
Without B3J Diesel Equipment	TLY	N.C.	46.00	46.00
With B3J Diesel Equipment	Ϋ́JT	N.C.	22.00	22.00
Spare				
Without B3J Diesel Equipment	TLS	N.C.	23.00	23.00
P225/75R15 All Seasons Steel Belted Radial Ply Blackwall	ZJT	N.C.	11.00	11.00
(Maximum Capacity 1703-lbs)				
R1 Series only				
Front				
Without 83J Diesel Equipment	XET	N.C.	74.00	74.00
With B3J Diesel Equipment	XET	N.C.	50.00	50.00
Without B3J Diesel Equipment	YET	N.C.	74.00	74.04
With B3J Diesel Equipment	YET	N.C.	74.00 50.00	74.00 50.00
Spare		11.0.	55.50	30.00
Without B3J Diesel Equipment	ZET	N.C.	37.00	37.00
With B3J Diesel Equipment	ZET	N.C.	25.00	25.00
P225/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1703-lbs)				
R1 Series only				
Front				
Without B3J Diesel Equipment	XEU	N.C.	110.00	110.00
With B3J Diesel Equipment	XEU	N.C.	86.00	86.00
Rear Without P3 I Discol Four-mont				
Without B3J Diesel Equipment	YEU	N.C.	110.00	110.00
Spare	YEU	N.C.	86.00	86.00
Without B3J Diesel Equipment	ZEU	N.C.	55.00	55.00
With B3J Diesel Equipment	ZEU	N.C.	43.00	43.00
P235/75R15 All Seasons Steel Belted Radial Ply Blackwall				
Maximum Capacity 1843-lbs) Front				
R1 Series only				
Without B3J Diesel Equipment	XFL	N.C.	102.00	102.00
With B3J Diesel Equipment	XFL	N.C.	78.00	78.00
V1 Series only (Standard)	XFL	NO AD	DITIONAL C	
Rear B1 Series anti-				
R1 Series only Without B3J Diesel Equipment	VE			
With B3J Diesel Equipment	YFL YFL	N.C. N.C.	102.00	102.00
V1 Series only (Standard)	YFL		78.00 DITIONAL C	78.00
Spare		110 / 10	DITTORAL C.	IANGE
R1 Series only				
Without B3J Diesel Equipment	ZFL	N.C.	51.00	51.00
With B3J Diesel Equipment V1 Series only. (Standard)	ZFL	N.C.	39.00	39.00
235/75R15 On-Off Road Steel Belted Radial Ply Blackwall	ZFL	NO AD	DITIONAL CI	HARGE
Maximum Capacity 1843-lbs)				
Front.				
V1 Series only	XES	N.C.	22.00	22.00
Rear R1 Series only				
Without B3J Diesel Equipment	YES	N.C.	124.00	
With B3J Diesel Equipment	YES	N.C.	124.00 100.00	124.00 100.00
V1 Series only	YES	N.C.	22.00	22.00
Spare				22.50
R1 Series only				
Without B3J Diesel Equipment With B3J Diesel Equipment	ZES	N.C.	62.00	62.00
V1 Series only	ZE\$	N.C.	50.00	50.00
The second wing of the second	ZES	N.C.	11.00	11.00

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price⇔
Description				
Fires: (Continued)				
P235/75R15 All Seasons Steel Belted Radial Ply Whitewall (Maximum Capacity 1843-lbs)				
Front				
R1 Series only	XFM	N.C.	138.00	138.00
Without B3J Diesel Equipment	XFM	N.C.	114.00	114.00
V1 Series only	XFM	N.C.	36.00	36.00
Rear				
R1 Series only			400.00	138.00
Without B3J Diesel Equipment	YFM	N.C. N.C.	138.00 114.00	114.00
With B3J Diesel Equipment	YFM YFM	N.C.	36.00	36.00
V1 Series only	3 C IAI	14.0.	50.55	
Spare R1 Series only				
Without B3J Diesel Equipment	ZFM	N.C.	69.00	69.00
With B3J Diesel Equipment	ZFM	N.Ç.	57.00	57.00
V1 Series only	ZFM	N.C.	18.00	18.00
P235/75R15 All Seasons Steel Belted Radial Ply White Lettered (Maximum Capacity 1843-lbs)				
R1 Series only				
Front				
Without B3J Diesel Equipment	XFN	N.C.	152.00	152.00
With B3J Diesel Equipment	XFN	N.C.	128.00	128.00
Rear	YFN	N.C.	152.00	152.00
Without B3J Diesel Equipment	YFN	N.C.	128.00	128.00
With B3J Diesel Equipment	11.44	11.0.	, 20.00	·
Spare Without B3J Diesel Equipment	ZFN	N.C.	76:00	76.00
With B3J Diesel Equipment	ZFN	N.C.	64.00	64.00
P235/75R15 On-Off Road Steel Belted Radial Ply White Lettered (Maximum Capacity 1843-lbs)				
V1 Series only				70.00
Front	XEB	N.C. N.C.	70.00 70.00	70.00
Rear	YEB ZEB	N.C.	35.00	35.00
Spare	220			•
(Maximum Canacity 1790-the)				
R10703 only. Available only when N67 or PA6 Wheels are specified.				
Front				050.00
Without B3J Diesel Equipment	XTS	N.C.	250.00	250.00 ~226.00
With B3J Diesel Equipment	XTS	N.C.	226.00	-220.00
Rear	YTS	N.C.	250.00	250.00
Without B3J Diesel Equipment	YTS	N.C.	226.00	226.00
Spare				
Without B3J Diesel Equipment	ZTS	N.C.	125.00	125.00
With B3J Diesel Equipment	ZTS	N.C.	113.00	113.00
31 x 10.50R/15LTB On-Off Road Steel Belted Radial Ply Blackwall.				
(Maximum Capacity 1775-lbs).				
V1 Series only. Available only when N67, N90, PF2 or PA6 Wheels are specified	24124		186.00	186.02
Front	XUY	.02 .02	186.00	186.02
Rear	YUY ZUY	.02 .01	93.00	93.01
Spare	20.			
(Maximum Capacity 1775-lbs).				
V1 Series only. Available only when N67, N90, PF2 or PA6 Wheels are specified				
Front	XUZ	.02	252.00	252.02
Rear	YUZ	.02	252.00	252.02 126.01
Spare	ZUZ	.01	126.00	120.01
7.50R16/D Highway Steel Belted Radial Ply Blackwall				
(Maximum Capacity 2440-lbs). Not available when C6P H.D. Chassis is specified.				
Regular Cab only Front	XWY	.60	(-58.00)	(-57.40)
Rear	ŶŴŶ	.60	(-58.00)	(-57.40)
Spare	ZWY	.30	292.00	292.30

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with Initial shipments of 1987 model motor vehicles

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price \(\)
		56 11(0)	11100	
ires: (Continued)				
7.50R16/D On-Off Road Steel Belted Radial Ply Blackwall				
Maximum Capacity 2440-ibs). Not available when C6P H.D. Chassis is specified.				
Regular Cab only				
Front. V2 Series only	xwx	1.02	4.00	5.02
Rear	YWX	1.02	4.00	5.0
Spare	ZWX	.51	323.00	323.5
T215/85R16-C Highway Steel Belted Radial Ply Blackwall				
Maximum Capacity each. Front or Single Rear 1940-lbs) (Dual Rear 1764-lbs). Not				
available on R-V2 Regular Cab when C6P H.D. Chassis is specified.				
Front.		_		
R-V2 Regular Cab only. (Standard)	XYJ		DITIONAL C	CHARGE
R3 Series only. Requires R05 Dual Rear Wheels	XYJ	(-1.82)	(-66.00)	(-67.32
Rear B.V.2 Recorder Cab and Assessment	1041			
R-V2 Regular Cab only (Standard)	λλΊ		DITIONAL C	
Spare	AAn	(-1.96)	508.00	506.0
R-V2 Regular Cab only	ZYJ	N.C.	221.00	224.0
R3 Regular Cab only. Requires R05 Dual Rear Wheels	ZYJ	N.C.	321.00 332.00	321.0
T215/85R16-D Highway Steel Belted Radial Ply Blackwall	213	14.0.	332.00	332.0
Maximum Capacity Front or Single Rear 2315-lbs). (Dual Rear 2105-lbs). Not				
available R-V2 Regular Cab when C6P H.D. Chassis is specified.				
Front				
R-V2 Regular Cab only	XYK	.10	34.00	34.1
R-V3 Series only. Requires R05 Dual Rear Wheels	XYK	(-1.72)	(-32.00)	(-33.72
Rear		•	,,	,
R-V2 Regular Cab only	YYK	.10	34.00	34.1
R-V3 Series only. Requires R05 Dual Rear Wheels	YYK	(-1.76)	576.00	574.2
Spare				
R-V2 Regular Cab only	ZYK	.05	338.00	338.0
R-V3 Series only. Requires R05 Dual Rear Wheels	ZYK	.05	349.00	349.0
T215/85R16-D On-Off Road Steel Belted Radial Ply Blackwall				
Maximum Capacity Front or Single Rear 2315-lbs). (Dual Rear 2105-lbs) Not				
available R-V2 Regular Cab when C6P H.D. Chassis is specifed.				
V2 Series only	XYL	16	00.00	00.1
V3 Series only. Requires R05 Dual Rear Wheels	ΧΥL	.16 (-1.66)	90.00	90.1
Rear	AIL.	(+1.00)	24.00	22.3
R-V2 Regular Cab only	YYL	.16	90.00	90.10
R-V3 Series only. Requires R05 Dual Rear Wheels	ÝÝL	(-1.64)	688.00	686.3
Spare		(,	000.00	000.0
R-V2 Regular Cab only	ZYL	.08	366.00	366.0
R-V3 Series only. Requires R05 Dual Rear Wheels	ŽYL	.08	377.00	377.0
T235/85R16-D Highway Steel Belted Radial Ply Blackwall				
Maximum Capacity 2623-lbs).				
Front				
R-V2 Regular Cab without C6P H.D. Chassis	XYM	1.82	88.00	89.B2
R-V2 Regular Cab with C6P H.D. Chassis or R20943 Bonus and Crew Cab.				
(Standard)	XYM		DITIONAL C	
R-V3 Series only. (Standard)	XYM		DITIONAL C	
Rear, R-V2 Regular Cab only. Not available when C6P H.D. Chassis is specified	YYM	1.82	88.00	89.B2
Spare, R-V2 Regular Cab only. Not available when C6P H.D. Chassis is specified.	72/4	••		
	ZYM	.91	365.00	365.9
T235/85R16-E On-Off Road Steel Belted Radial Ply Blackwall				
Maximum Capacity 3042-lbs). R-V2 Regular Cab available only when C6P H.D. Chassis is specified. V3 Series not available when R05 Dual Rear Wheels are				
specified.				
Front. V2-3 Series only	VVT	••	00.00	96.04
Rear. R-V2 or V3 Series only	XYT YYT	.88 .74	88.00 56.00	88.88
Spare. R-V2 or V3 Series only	ZYT	1.35	409.00	56.74 410.35
Suara, n-vz ur vs series aniv			7U5.UU	→ IU.3 7

1

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price >
		 -	* -	
ires: (Continued)				
T225 /85816-F Highway Steel Relted Radial Plv Blackwall				
Marrianum Canacity 2042-the). Available only when CSP H.D. Chassis is specified				
on R2 Regular Cab. R-V3 not available when R05 Dual Rear Wheels are				
specified.				
Front				
R2 or R-V3 Series only	XYN	.14	32.00	32.14
V2 Series only			400.00	121.96
Without C6P H.D. Chassis	XYN	1.96	120.00	32.14
With C6P H.D. Chassis	XYN	.14	32.00	32.14
Rear	YYN	NO A	DDITIONAL C	HARGE
R2 or R-V3 Series only (Standard)	1114	70 7	DDITIONAL O	
V2 Series only	YYN	1.96	120.00	121.96
Without C6P H.D. Chassis	YYN		DDITIONAL C	
With C6P H.D. Chassis. (Standard)	ZYN	.98	381.00	381.98
Spare. R-V2-3 Series only	E		•••	
UBE-TYPE				
7.50-16/C Highway Nylon Blackwall Maximum Capacity each. Front 2060-lbs) (Dual Rear 1815-lbs). Available only				
when ROS Dual Rear Wheels are specified.				
Front. R3 Series	XPB	(-1.82)	(-286.00)	(-287.82
Rear, R3 Regular Cab only	YPB	(-1.96)	68.00	66.0
Spare. R3 Regular Cab only	ZPB	N.C.	222.00	222.0
7.50-16/C On-Off Road Nylon Ply Blackwall				
Maximum Capacity each. Dual Rear 1815-lbs). Available only when RO5 Dual Rear				
Wheels are specified. R3 Regular Cab only				
Rear	YPC	(-1.96)	188.00	186.0
Spare	ZPC	N.C.	252.00	252.0
7.50-16/D Highway Nylon Ply Blackwall				
Maximum Capacity each. Front 2440-lbs) (Dual Rear 2140-lbs). Available only				
when RO5 Dual Rear Wheels are specified.			(050.00)	(-253.82
Front	XPF	(-1.82)	(-252.00) 136.00	134.0
Rear	YPF ZPF	(-1,96) N.C.	239.00	239.0
Spare	277	M.C.	239.00	200.0
7.50-16/D On-Off Road Nylon Ply Blackwall				
Maximum Capacity each. Front 2440-lbs) (Dual Rear 2140-lbs). Available only				
when R05 Dual Rear Wheels are specified. Front. V3 Series only	XPG	(-1.78)	(-192.00)	(-193.78
Rear. R-V Series only	YPG	(-1.88)	256.00	254.1
Spare	ZPG	.02	269.00	269.0
Cpare				
OTHER OPTION	S			
Air Cleaner, Pre-Cleaner: Not available when L25 4.8 Liter Engine is	K46	N.A.	44.00	44.0
specified				
Air Conditioning: All-Weather. With LB4 4.3 Liter Engine available only when				
KC4 Engine Oil Cooler is specified. Not available when V10 Cold-Climate Package				
is specified. Includes extra cooling.	C60	N.A.	781.00	781.0
Without B3J Diesel Equipment	C60	N.A.	719.00	719.0

Appearance, Deluxe Front: Includes dark argent grille with bright trim and dual rectangular headlamps. Included when YE9 is specified	V22	N.A.	115.00	115.0
Retteries: 12-Volt Not available when B3J Diesel Equipment is specified.				
Auviliany 540 Cold Cranking Amps Delco Freedom, Not available on R-V1 Series	TP2	N.A.	134.00	134.0
Heavy-Duty, 630 Cold Cranking Amps Delco Freedom. Included when V10				
Cold-Climate Package is specified	UA1	N.A.	56.00	56.0
				
	 			-

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

♦ State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price◊
OTHER OPTIONS				
Brakes:				
Power. R1 Series only. Not available when B3J Diesel Equipment is specified. Heavy-Duty Power. Standard on V1 Series, R2 Bonus and Crew Cab and R-V3 Series. Included when C6P H.D. Chassis is specified. Without B3J Diesel Equipment.	J50	N.A.	101.00	101.0
R1 Series only	J55	N.A.	185.00	185.0
Rear Springs are specified	J55	N.A.	110.00	110.0
V2 Regular Cab only	J55	N.A.	110.00	110.00
With B3J Diesel Equipment. Included on R1 Series only R2 Regular Cab only. Available only when G50 H.D. or G51 Extra Capacity				
Rear Springs are specified	J55	N.A.	110.00	110.0
V2 Regular Cab	J55	N.A.	110.00	110.00
Bumper Equipment: Bumpers, Chromed.				
Rear	VF1	N.A.	115.00	115.00
Rear Step. Fleetside only	V42	N.A.	200.00	200.0
Bumpers, Painted. Rear Step	V43	N.A.	130.00	130.0
Guards, Front Bumper. Chromed	V31	N.A.	43.00	43.0
Camper Special Chassis Equipment: Basic Camper Group. R-V2-3 Series only. Available only when V8 engine is specified. Includes camper body wiring harness. R2 Series only. Also includes F58 H.D. Front Stabilizer.				
Regular Cab only. Available only when C6P H.D. Chassis is specified	Z8 1	N.A.	70.00	70.0
Bonus Cab or Crew Cab only	Z81	N.A.	70.00	70.0
F60 H.D. Front Springs	Z8 1	N.A.	114.00	114.0
Without R05 Dual Rear Wheels	Z81	N.A.	110.00	110.0
Auxiliary Rear Springs and rear stabilizer	Z81	N.A.	256.00	256,0
V3 Series only. Available only when R05 Dual Rear Wheels are specified	Ž81	N.A.	51.00	51.0
Carriers, Spare Wheel and Tire: Available only when spare tire is pecified.			000	01.0
	P11	N.A.	43.00	43.00
ide Mounted. Fleetside only	P13	N.A.	31.00	31.00
Rock: Quartz Electric. Not available when UMS Radio is specified. Without YE9. Includes Z53 Voltmeter, Temperature and Oil Pressure Gages	HOE			
With VEG	U35	N.A.	83.00	83.0
With YE9 Cold-Climate Package: Not available when C60 Air Conditioning or B3J biesel Equipment is specified. Includes special insulation, special heater and lefroster, K05 Engine Block Heater, anti-freeze protection to -32 degrees and UA1 I.D. Battery.	U35	N.A.	41.00	41.00
Without Z62 or YE9	V10	N.A.	147.00	147.00
With YE9 or Z62	V10	N.A.	134.00	134.00
tabilizer and G60 Main and Auxiliary Rear Springs	Z76	N.A.	210.00	210.00
cooling Systems: ngine Oil. Not available when L25 4.8 Liter Engine or B3J Diesel Equipment is				
specified	KC4	N.A.	126.00	126.00
Equipment is specified. R-V1 Series only	V01	N A	EC 00	**
R-V2-3 Series only. Not available when MX0 or MX1 Automatic Transmission is	V01	N.A.	56.00	56.00
specified	V01	N.A.	56.00	56.00
Automatic Transmission is specified.	. V02	N.A.	63.00	63.00

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(z)	List Price	Mfr's Suggested Retail Price⇔	
OTHER OPTIONS					
Decor Package, Value: (Refer YJ6 Color and Striping Availability Chart for prodering information). Not available on Bonus Cab, Crew Cab or Stepside Models. Not available when YE9, R05 Dual Rear Wheels, V22 Deluxe Front Appearance, whitewall tires, PA6 or PF2 Wheels, B84 or B85 Body Side Moldings. Available only when ZY1 Solid Paint and 12A, 19A, 29A or 72A Striping and blackwall or white lettered tires are specified. Includes blacked painted radiator grille and neadlamp bezels and special body stripe located between body feature lines on the front fenders, pickup box and will extend across the tailgate	W.10		272.00	272.00	
R-V1 series. Also includes N67 Rally Wheels	9LY 9LY	N.A. N.A.	272.00 149.00	149.00	
Door Lock System, Power: Included when ZQ2 Operating Convenience	150	11.7.	140.00		
Package is specified					
Regular Cab only	AU3	N.A.	144.00	144.00	
Bonus and Crew Cab only	AU3	N.A.	211.00	211.00	
Floor Covering: Mats, Color-Keyed Front Floor. Removable. Available only	B32	N.A.	16.00	16.00	
when YE9 is specified	502	14.7.	10.00		
Electric Clock is specified	Z53	N.A.	42.00	42.00	
Glass: Tinted. All Windows.					
Regular Cab only	A01	N.A.	48.00	48.00	
Bonus Cab or Crew Cab only	A01	N.A.	60.00	60.00	
Headlamps: Halogen Hi-Beam. Available only when V22 Deluxe Front	175	N.A.	18.00	18.00	
Appearance or YE9 is specified	113	N.A.	18.00	10.0	
Headliner Package: C-K1,2 Regular Cab only. Not available when YE9 is specified. Includes headliner					
Without Z62. Also includes color-keyed floor covering and C91 Dome Lamp.	MNW	N.A.	84.00	84.0	
With Z62	MNW	N.A.	56.00	56.00	
Heaters:			•		
Engine Block. 600 Watts, 120 Volts. Not available when B3J Diesel Equipment	KOE	N.A.	33.00	33.00	
is specified. Included when V10 Cold-Climate Package is specified	K05 C42	N.A.	45.00	45.00	
Hubs: V1 series only					
Automatic Locking	X6Z	N.A.	60.00	60.00	
Manual	X6W	NO A	DDITIONAL C	CHARGE	
Lamps:					
Cargo. Without Z62 or YE9, Includes C91 Dome Lamp	UF2	N.A.	64.00	64.00	
With Z62 or YE9	UF2	N.A.	36.00	36.00	
Dome. Included when Z62, YE9 or UF2 Cargo Lamp is specified. Includes door			20.00	20.0	
actuated switches and bright lamp bezels	C91	N.A.	28.00	28.00	
Rear Wheels, available only when NA5 Standard on NA6 High Altitude Emission					
Equipment is specified. Included when R05 Dual Rear Wheels are specified	U01	N.A.	52.00	52.0	
Lighter, Cigarette: Included when Z62 or YE9 is specified	U37	N.A.	32.00	32.0	
Mirrors, Exterior: LH and RH.					
Below-Eye-Line Type. 9" x 6.5".					
Painted	D44 D45	N.A. N.A.	52.00 67.00	52.00 87.00	
Stainless Steel	D45	11.7.	Q7.00	07.0	
of vision for vehicles to 96" wide. Shipped loose for dealer installation	DF2	N.A.	100.00	100.00	
Senior West Coast Type. Painted. R-V3 Series only. Shipped loose for dealer	D.C.	A. 4	60.00	20.00	
installation	DG5	N.A.	69.00	69.00	
Moldings: Fleetside only. Body Side Black. Bright with black insert. Not available when YE9, R05 Dual Rear Wheels, B85 Bright Body Side Moldings or YG3 Deluxe Molding Package is specified. Included when YG1 Custom Molding Package. Z62, ZY3 Special					
Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package is specified. Includes lower side and rear moldings of black plastic with bright trim	B84	N.A.	121.00	121.0	
specimen, includes lower side and rear moldings of diack bidsuc with bright tim					

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that
it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price()
OTHER OPTIONS			:	
Moldings: (Continued) Body Side Bright. Not available when B84 Black Body Side Moldings, YG1 Custom Molding Package, R05 Dual Rear Wheels, ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package is specified, Included when YG3 Deluxe Molding Package or YE9 is specified, Includes bright plastic body side rear lower moldings with black paint trim plus bright trim for front side marker lamps and taillights.				
Without Z62	885 885	N.A. N.A.	152.00 16.00	152.00 16.00
Custom Package. Fleetside only. Not available when YG3 Deluxe Molding Package, YE9 or R05 Dual Rear Wheels are specified. Included when ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior Decor Package is specified. Includes B84 Black Body Side Moldings, wheel opening moldings, bright trim for front side marker lamps and taillights.				
Without Z62	YG1	N.A.	166.00	166.00
With Z62	YG1	N.A.	31.00	31.00
Exterior Decor Package	YG3	N.A.	183.00	183.00
With Z62 With ZY3 Special Two-Tone Paint, ZY4 Deluxe Two-Tone Paint or ZY5 Exterior	YG3	N.A.	46.00	46.00
Decor Package	YG3	N.A.	17.00	17.00
Regular Cab only	B93	N.A.	18.00	18.00
Bonus Cab or Crew Cab only	B93	N.A.	24.00	24.00
Operating Convenience Package: Includes AU3 Power Door Locks and A31 Power Windows				
Regular Cab only	ZQ2 ZQ2	N.A. N.A.	344.00 519.00	344.00 519.00
Preliminary Price Information	B3W	N.A.		N.A.
Radio Equipment:	DOW	N.A.	N.A.	N.A.
AM Radio	U63	N.A.	122.00	12:2.00
AM/FM Radio	U 6 9	N.A.	181.00	181.00
AM/FM Stereo Radio	U58	N.A.	208.00	203.00
AM/FM Stereo Radio with Stereo Cassette Tape	UN3	N.A.	308.00	303.00
Electronically Tuned	UM6	N.A.	429.00	429.00
Windshield Antenna. Included with radio	U76	N.A.	34.00	34.00
Rails, Pickup Box Side	D73	N.A.	100.00	100.00
Shield, Transfer Case: V1-2-3 Series only	NY7	N.A.	43.00	43.00
Crew Cab and R-V3 Series, Included on R2 Series when C6P H.D. Chassis is				
specified. Not available V1-2 Series. Shocks, Front Quad: V1-2 Regular Cab only. Includes dual left and right	F51	N.A.	36.00	36.00
hand shock absorbers on front, heavy duty shock absorbers on rear and a front axle				
V1 Series only.	Z75	N.A.	136.00	136.00
Without C6P H.D. Chassis With C6P H.D. Chassis	275 275	N.A. N.A.	136.00 100.00	136.00 100.00
Speed Control, Electronic: R1 Series without B3J Diesel Equipment is wailable only when J50 or J55 H.D. Power Brakes are specified. R-V1 Series not wailable when MM7 4-Speed with Overdrive Transmission is specified. R-V2-3 Series with L05 5.7 or L19 7.4 Liter Engine, MM4 4-Speed Transmission is not				
wailable	K34	N.A.	205.00	205.00
Bprings: Front, Heavy-Duty. Not available on R2 Bonus and Crew Cab and R-V3 Series.				
Capacity 1625-lb each. R1 Series not available when J55 HD Power Brakes				
or B3J Diesel Equipment is not specified	F60	N.A.	15.00	15.00

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price
OTHER OPTIONS				
prings: (Continued)				
Capacity 1700-b each. R1 Series only. Included when B3J Diesel Equipment is specified. Available only when J55 H.D. Power Brakes are specified.	F60	N.A.	15.00	15.00
Capacity 1900-lb each. R2 Series only, Included when C6P H.D. Chassis or B3J Diesel Equipment is specified	F60	N.A.	15.00	15.00
Capacity 2250-th each. V1 Series only, Includes H.D. front and rear shock absorbers.				
Percented for encurious type USBOB ORIV.	F60	N.A.	98.00	98.00
Without Z75 Front Quad Shocks	F60	N.A.	63.00	63.00
Series only. Included when Z81 Camper Special Chassis Equipment is specified. Includes H.D. front and rear shock absorbers when C6P H.D.				
Characterie and energified	560	N.A.	98.00	98.00
Without Z75 Front Quad Shocks or C6P H.D. Chassis	F60 F60	N.A.	63.00	63.00
Without 275 Front Quad Shocks or C6P H.D. Chassis With Z75 Front Quad Shocks or C6P H.D. Chassis Rear, Heavy-Duty. Not available on C6P H.D. Chassis, R2 Bonus and Crew Cab, R3	100			
and V1-2-3 Series. Capacity 1750-lb each. R1 Series only.	G50	N.A.	62.00	62.00
Canacing 2800. In each, two-stage, R2 Requist Cab only, Not available when	650	N.A.	62.00	62.00
C6P H.D. Chassis or Z81 Camper Special Chassis Equipment is specimed	G50	N.A.	02.00	02.0
Rear, Extra Capacity. Capacity 2000-lb each. R1 Series only	G5 1	N.A.	75.00	75.00
Capacity 3000-lb each. R2 Series only. Standard on R2 Sonus and Crew Cab and R2 Series only. Not available on V2 Series. Included when C6P H.D. Chassis			77.00	75.0
is exacified	G51	N.A.	75.00	75.0
Rear, Main and Auxiliary. Capacity 3750-lb each. R-V3 Series only. Included when Z81 Camper Special Chassis Equipment is specified with R05 Dual Rear Wheels at 278 Commercial Chassis Equipment on R3 Series. Also included when R05		At A	103.00	103.0
Dual Rear Wheels are specified on V3 Series	G80	N.A.	103.00	100.0
Stabilizar Bara: Front. 1" diameter. Standard on R2 Bonus or Crew Cab. Included when C6P H.D. Chassis is specified on R2 Series. Not available on V1-2-3 Series or when Z76 Commercial Chassis Equipment or Z81 Camper Special Chassis Equipment is specified Front. Heavy-Duty. 1.25" diameter. R2-3 Series only. Standard on V1-2-3 Series. Included when Z76 Commercial Chassis Equipment or Z81 Camper Special	F59	N.A.	40.00	40.0
Changin Fruinment is specified	F58	N.A.	59.00	59.0
Without C6P H.D. Chassis	F58	N.A.	19.00	19.0
Steering: Power. Standard on V1-2-3 Series. Included when 83J Diesel Equipment is			275.00	275.0
amanified.	N41	N.A.	2/5.00	275.0
Power, Not Desired. R1-2-3 Series only. Not available when B3J Diesel Equipment is specified.	N51	NO A	ADDITIONAL	CHARGE
Steering Wheel: Comfortilt. Not available when MM3 3-Speed Manual Transmission is specified.	N33	N.A.	121.00	121.0
Tank, Fuel: Auxiliary. RH Frame Mounted.				
9.V1.2 Series only				
Without B3J Diesel Equipment. Provides two fuel tanks of approximately 16-gallon per tank	NL2	N.A.	277.00	277.0
With B3J Diesel Equipment. V10703. Provides two fuel tanks of approximately 16-gallon per tank.	NL2	N.A.	288.00	
D V 10002 Describes two first tanks of approximately ZU-gallon per tank.	NL2	N.A.	288.00	288.0
D V2.2 Series only Provides two fuel tanks of approximately 20-gation per tens.	NL2	N.A.	277.00	277.0
Without B3J Diesel Equipment With B3J Diesel Equipment	NL2	N.A.	288.00	288.0
Towing Device: Two front towing hooks.	V76	N.A.	38.00	38.0
Wheel Trim: Bright Metal.				
18th all Council	PA4	N A	42.00	42.0
R-V1 Series only	P01	N.A.	72.00	
R3 Series only. Available only when R05 Dual Rear Wheels and 7.50-16 Tires are specified.	PO1	N.A.	51.00	51.0
are specified				

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(s)	List Price	Mfr's Suggested Retail Price ◊
OTHER OPTIONS		 :		· · · · · ·
Wheel Trim: (Continued)				
Wheel Covers, Special. R-V2 and R3 Series only. Not available when R05 Dual				
Rear wheels are specified	PA1	N.A.	124.00	124.00
Wheels: R-V1 Series only. Relly. Includes special hub caps and trim rings, Included when YJ6 Value Decor Package is specified.				
Without P225 or P235 Tires. Wheel size is 15" x 7"	N67	N.A.	121.00	121.00
With P225 or P235 Tires, Wheel size is 15" x 8"	N67	N.A.	121.00	121.00
Without P225 or P235 Tires, Wheel size is 15" x 7"	PA6	N.A.	185.00	185.56
With P225 or P235 Tires. Wheel size is 15" x 8"	PA6	N.A.	185.00	185.00
and special hub caps	N90	N.A.	318.00	010.00
Numinum, Forged. Four Wheels only. Includes 15" x 7" wheels and enecial bub.	1450	n.a.	310.00	318.00
Caps.	PF2	N.A.	449.00	449.00
Wheels, Dual Rear: R-V3 Fleetside only. Not available when L25 4.8 Liter ingine is specified. Includes plastic rear fender extensions with side marker lamps ocated on front and rear sides and dual rear chassis provisions R3 Series only. Available only when Z76 Special Commercial Chassis Equipment or Z81 Camper Special Chassis Equipment is specified. MX1 Automatic Transmission available only when V02 H.D. Radiator and Transmission Oil Cooler is specified. Includes U01 Roof Marker Lamps	DOS		245.00	
V3 Series only. MX1 Automatic Transmission available only when V02 H.D. Radiator and Transmission Oil Cooler is specified, Includes G80 Main and	RO5	N.A.	715.00	715.00
Auxiliary Springs	RO5	N.A.	765.00	765.00
Vheels are specified	RO4	NO 45	DITIONAL C	HARCE
Vindows:	1104	NO AL	DITIONAL CI	TARGE
ower. Included when ZQ2 Operating Convenience Package is specified				
Regular Cab only	A31 A31	N.A.	200.00	200.00
liding Rear. (Note: If AO1 Tinted Glass is specified, sliding window will remain	A31	N.A.	308.00	308.00
clear.)	A28	N.A.	113.00	113.00
Vindshield Wiper System: Intermittent Not available when MM3 3-Speed fanual Transmission is specified.	CD4	N.A.	59.00	59.00
				33.00
				
	· · · · · · · · · · · · · · · · · · ·		· · · · · · · · · · · · · · · · · · ·	
			"	·,-
				
				<u> </u>
				 -

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price♦
	UED ODTIONS			
	HER OPTIONS			
iprings: (Continued)				
Rear, Extra Capacity. Capacity 2000-lb each. R1 Series only Capacity 3000-lb each. R2 Series only. Standard on R2	G51	N.A.	75.00	75.00
Bonus and Crew Cab and R-V3 Series only. Not available on V2 Series. Included when C6P H.D. Chassis is specified Rear, Main and Auxiliary. Capacity 3750-lb each. R-V3 Series only. Included when Z81 Camper Special Chassis Equipment is specified with R05 Dual Rear Wheels or Z76	G51	N.A.	75.00	75.00
Commercial Chassis Equipment on R3 Series. Also included when R05 Dual Rear Wheels are specified on V3 Series. Stabilizer Bars:	G60	N.A.	103.00	103.00
Front. 1" diameter. Standard on R2 Bonus or Crew Cab. Included when C6P H.D. Chassis is specified on R2 Series. Not available on V1-2-3 Series or when Z76 Commercial Chassis Equipment or Z81 Camper Special Chassis		N.A.	40.00	40.00
Equipment is specified	F59	N.A.		
Without C6P H.D. Chassis	F58 F58	N.A. N.A.	59.00 19.00	59.00 19.00
Steering: Power. Standard on V1-2-3 Series. Included when B3J Diesel Equipment is specified	N41	N.A.	275.00	275.00
Power, Not Desired. R1-2-3 Series only. Not available when B3J Diesel Equipment is specified	N51	NO ADDITIONA	L CHARGE	:
Steering Wheel: Comfortilt. Not available when MM3 3-Speed Manual Transmission is specified	N33	N.A.	121.00	121.00
Tank, Fuel: Auxiliary. RH Frame Mounted. R-V1-2 Series only Without B3J Diesel Equipment. Provides two fuel tanks of approximately 16-gallon per tank With B3J Diesel Equipment.	NL2	N.A.	277.00	277.00
R-V10703. Provides two fuel tanks of approximately 16-gallon per tank	NL2	N.A.	288.00	288.00
R-V10903. Provides two fuel tanks of approximately 20-gallon per tank	NL2	N.A.	288.00	288.00
R-V2-3 Series only. Provides two fuel tanks of approximately 20-gallon per tank.			077.00	277.00
Without B3J Diesel Equipment	NL2	N.A.	277.00 288.00	277.00 288.00
With B3J Diese! Equipment	NL2	N.A. N.A.	38.00	38.00
Towing Device: Two front towing hooks	V76	N.A.	36.00	55.55
Wheel Covers. R-V1 Series only	PO1	N.A.	42.00	42.00
and 7.50-16 Tires are specified	PO1	N.A. N.A.	51.00 124.00	51.00 124.00
when R05 Dual Rear Wheels are specified	PA1	1310	00	
YJ6 Value Decor Package is specified. Without P225 or P235 Tires. Wheel size is 15" x 7" With P225 or P235 Tires. Wheel size is 15" x 8"	N67 N67	N.A. N.A.	121.00 121.00	121.00 121.00
Styled. Includes special hub caps. Four wheels only. Without P225 or P235 Tires. Wheel size is 15" x 7"	PA6	N.A.	185.00	185.00
With P225 or P235 Tires. Wheel size is 15" x 8"	PA6	N.A.	185.00	185.00
15" x 7" wheels and special hub caps	N90	N.A.	318.00	318.00
wheels and special hub caps	PF2	N.A.	449.00	449.00

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that
it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

OPTIONS WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(z)	List Price	Mfr's Suggested Retail Price
OT	HER OPTIONS			
Wheels, Dual Rear: R-V3 Fleetside only. Includes plastic rear fender extensions with side marker lamps located on front and rear sides and dual rear chassis provisions R3 Series only. Available only when Z76 Special Commercial Chassis Equipment or Z81 Camper Special Chassis Equipment is specified. MX1 Automatic Transmission				
available only when VO2 H.D. Radiator and Transmission Oil Cooler is specified. Includes UO1 Roof Marker Lamps V3 Series only. MX1 Automatic Transmission available only when VO2 H.D. Radiator and Transmission Oil Cooler is	RO5	N.A.	715.00	715.00
specified. Includes G60 Main and Auxiliary Springs Wheels, Single Rear: R-V3 Fleetside only. Not available	RO5	N.A.	765.00	765.00
when R05 Dual Rear Wheels are specified	RO4	NO ADDITIONA	L CHARGE	
is specified Regular Cab only	A31	N.A.	200.00	200.00
Bonus and Crew Cab only	A31 A28	N.A. N.A.	308.00 113.00	308.00 113.00
Windshield Wiper System: Intermittent Not available when MM3 3-Speed Manual Transmission is specified	CD4	N.A.	59.00	59.00
				
			·	
	 			
				
	_			

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 State and local taxes not included.

CAB & BODY FEATURES
CAB CONSTRUCTION
CAB DIMENSIONS
COLOR & TRIM CHARTS
TWO-TONES

CUSTOM DELUXE/SIERRA FEATURES—STANDARD MODEL

The Custom Deluxe/Sierra standard models include the following items as standard equipment



EXTERIOR

- Bumper: Front; chromed
- Color: See Interior and Exterior Color Selection Chart
- Grille and Headlamp Bezels: Molded plastic; painted light argent (GMC grille has dark argent air intake areas); integral Chevrolet emblem/GMC letters at center of grille
- Hom: Single, electric, low-note
- Hub Caps: Bright metal with black trim (single rear wheel models only)
- Keys: Two-key system; with separate keys for ignition switch and door locks
- Lettering, "Chevrolet/GMC" Tailgate: White decal except black with Frost White body color
- Lights:
 - Backup lamps: Two rear (integral with taillamps)
 Clearance and identification lamps (K3 Series models only):
 Five front (on roof); Five rear (on tailgate)
 Combination parking/direction/hazard: Two front
 Combination tail/stop/direction/hazard: Two rear
 Headlamps: Two, rectangular
 License plate lamp: Single rear

- Side marker lamps with reflectors: two front; two rear (integral with taillamps)
- Mirrors: RH and LH fixed arm with adjustable 5-7/16" wide x 4" high heads: chrome finish
- Moldings: Bright; drip molding over side doors; headla:np and grille outline moldings
 Nameplates: Bright "Custom Deluxe/Sierra" nameplates with
- Nameplates: Bright "Custom Deluxe/Sierra" nameplates with series designation on front fenders near doors; bright "3 + 3" nameplates on Crew Cab models or "BONUS CAB" nameplates on Bonus Cab models on cab rear quarters at styling crease line
- Pickup Box: Steel floor on Fleetside/Wideside models and wood floor with steel skid strips on Stepside/Fenderside models;


 The strip is the strip of the strip is the
- painted body color

 Spare Tire Carrier: Under frame in back (C-K1 Series models only)
- Tools: Mechanical jack and wheel wrench
- Wheels: Painted white
- Windshield Wipers and Washers: Electric, 2-speed wipers with black finish on exposed metal portions; wet-arm design demand-type washer system



CUSTOM DELUXE/SIERRA FEATURES—STANDARD MODEL

The Custom Deluxe/Sierra standard models include the following items as standard equipment

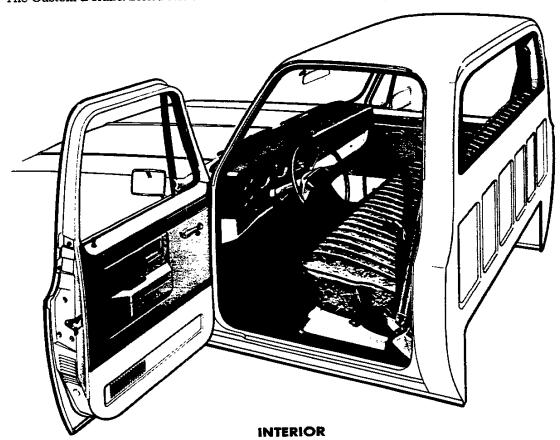

- Armrests: RH and LH padded; integral with door trim panels
- Ashtrays: In middle of instrument panel (all models) and in rear door trim panels (Crew Cabs and Bonus Cabs)
- Coat Hooks: RH (all models) and over rear doors (Crew Cabs and Bonus Cabs)
- Colors:
 - Painted areas: Same as exterior primary color choice Interior trim: Coordinated with seat trim color choice
- Door Sill Plates: Door-opening protection and floor mat retention; full-length; black plastic for Regular Cab front doors and bright metal for Bonus Cab and Crew Cab front and rear doors
- Door Trim Panels: Color-keyed, embossed molded plastic with integral armrests
- Floor Covering: Embossed black rubber mats
- Heater and Defogger: Deluxe-air
- Hood Lock Release: Handle located on LH side under instrument panel
- Instrument Cluster Bezel: Black crackle finish with bright trim
- Instruments:
 - Gages: Speedometer, odometer and fuel
 - Switches: Main, for control of exterior lights, instrument cluster lights, and cab interior lights; multi-function switch on steering column for direction signals by moving lever up or down includes lane change position), headlamp beams by pulling lever toward driver, windshield wiper by turning band marked "WIPER" toward or away from driver, and windshield washer by pushing in the lever knob; ignition with key-in warning buzzer; hazard warning; heater fan Warning lights: Generator, oil pressure, engine temperature,
 - Warning lights: Generator, oil pressure, engine temperature, seat belt, service-parking brake, direction/hazard signal, and high beam
- Instrument Panel Control Knobs: Soft black plastic (except heater and wiper-washer controls) with white graphic identification

- Instrument Panel Pad: Color-keyed, energy-absorbing foam type with grained vinyl skin; has black crackle-finished applique on RH side with bright, black, and silver trim and bright "Custom Deluxe/Sierra" nameplate
- Insulation and Sound Deadening Material: Dash (firewall), under front seat at center, under front floor mat, under rear floor mat and under rear seat at center on Crew Cabs, under rear floor mat on Bonus Cabs (center portion only in rearmost area) and between double-walled roof panel of regular cabs. NOTE: Extra-thick insulation used for front portion of Crew Cab and Bonus Cab rear compartment
- Lights: Instrument cluster and cab interior lights
- Mirror, Rearview: 10" prismatic with soft vinyl rim
- Seats: Full-width, full depth foam bench-type with embossed grained all-vinyl trim; front (all models) and rear (Crew Cabs only); includes folding backrest for regular cab seat and Crew Cab rear seat. Also available at extra cost: (1) dual-tone woven cloth/vinyl trim; or (2) all-vinyl pigskin grained trim. See Interior and Exterior Color Selection Chart for color and trim availability. NOTE: Crew Cab models have two bench seats—seating for six; Bonus Cab models have one bench seat—seating for three
- Seat Belts: Front (all models): non-detachable combination lap and shoulder belts for outboard positions with emergency-locking retractors and switch in driver's lap belt retractor for buzzer warning system; lap belt with manual adjustment for center position. Rear (Crew Cabs only): lap belts with emergency-locking retractors for outboard positions; lap belt with manual adjustment for center position. All seat belts are color-keyed with pushbutton type buckles
- Steering Wheel and Column: 16" black, soft plastic wheel with 2 spokes; black energy-absorbing steering column with anti-theft locking feature
- Stowage Box: In RH side of instrument panel; door has bright turn-type latch release
- Sunshades: RH and LH padded; color-keyed

SCOTTSDALE/HIGH SIERRA MODEL OPTION—RPO Z62 (FOR ALL MODELS)

This option includes all Custom Deluxe/Sierra standard model items plus the additions or substitutions listed below




 Bright Appearance Items: "Scottsdale/High Sierra" nameplates with series designation on front fenders

Body side and rear molding trim (Fleetside/Wideside models with single rear wheels only)
Chevrolet emblem/GMC letters at grille center

Front fender side marker lamp trim Rear fender clearance lamp trim (Fleetside/Wideside models

with dual rear wheels only)
Taillamp trim (Fleetside/Wideside only) Rear window reveal moldings

- Horn: Additional, electric high-note
- Moldings: Black plastic body side and rear moldings with bright trim (Fleetside/Wideside models with single rear wheels only)

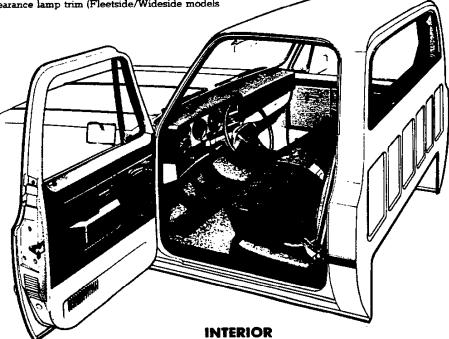

 Bright Appearance Items:
 "Scottsdale/High Sierra" nameplate on instrument panel pad Dome lamp trim

Trim on instrument cluster bezel, instrument panel pad applique

Trim on door trim panels (regular cabs only)

- Cigar Lighter: With fiber optic illuminated ashtray
- Dome Lamp: With bright trim
- Dome and Interior Lamp Switches: Front door-operated (dome and interior lamps also may be activated by main light switch)
- Door Trim Panels: Color-keyed embossed molded plastic, with black crackle-finished upper decorative inserts having a silver border (Regular Cabs only)
- Floor Covering: Color-keyed rubber mats (except Bonus Cab

rear compartment mat)

- Headliner: Full-length mystic-colored, perforated molded cloth with fiberglass blanket backing; includes matching retainer moldings (Crew Cabs and Bonus Cabs only)
- Insulation: Under cowl panel, on Crew Cab and Bonus Cab headliner, and on cab back panel
- Pillar Trim Panels: Mystic molded plastic or, windshield pillars and center door pillars (Crew Cabs and Bonus Cabs only)
- Seats: See Interior and Exterior Color Selection Chart for color and trim availability
 - Regular Cabs-choice of: 1) dual-tone woven cloth/vinyl trim; or 2) all-vinyl pigskin grained trim

Crew Cabs and Bonus Cabs-embossed grained all-vinyl trim standard. Also available at extra cost: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim

R/V Pickup -- Page D

General Motors Corporation

September, 1986

SILVERADO/SIERRA CLASSIC MODEL OPTION—RPO YE9 (FOR REGULAR CAB MODELS)

This option includes all items in the Scottsdale/High Sierra model option plus the additions or substitutions listed below



EXTERIOR

 Bright Appearance Items:
 "Silverado/Sierra Classic" nameplates with series designation on front fenders

Chrome-trimmed grille and headlamp bezels (Chevrolet models only)

Chevrolet emblem/GMC letters at grille center

Cab back panel applique molding
"Chevrolet/GMC letters" nameplate on tailgate applique panel
(Fleetside/Wideside only)

Bright applique panel fitted over central area of tailgate with


black-trimmed decorative border (Fleetside/Wideside only) Body side and rear moldings with black paint trim (Fleetside/ Wideside models with single rear wheels only)

Wheel-opening lip moldings with black paint trim (Fleetside/ Wideside models with single rear wheels only)

Cab-to-Fender Insulators
 Grille and Headlamp Bezel Paint: Dark argent (Chevrolet); argent/dark argent (GMC)

Hood Insulator

Special Headlamps: Rectangular; dual RH and LH

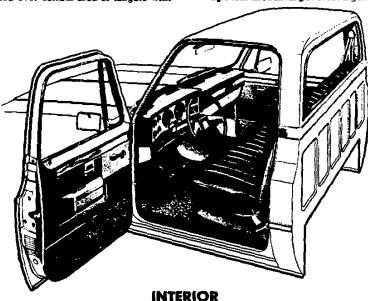

 Bright Appearance Items:
 "Silverado/Sierra Classic" nameplate on instrument panel pad MM4 four-speed transmission shift lever (C1-2-3 models)

Trim on horn button

• Cowl Panel Trim: Color-keyed molded plastic on entire surface

of cowl side panels:

Door Trim Panels: Special color-keyed molded plastic with pewter-toned brush-finished upper decorative inserts having bright, black, and silver borders; cloth inserts in armrest area; vinyl stowage pockets; door closing assist straps; plus carpeting

and bright trim strips on lower portions

Floor Covering: Color-keyed carpeting

Headliner: Periorated, color-keyed, molded cloth with fiberglass blanket backing; includes matching retainer moldings

- Instrument Cluster: Voltmeter, oil pressure gage, and engine temperature gage replace warning lamps; includes pewter-toned brush-finished bezel
- Instrument Panel Pad Applique: Pewter-toned brushed finish with bright, black, and silver trim
 Insulation: Headliner insulator, extra-thick insulators for entire
- Seat: Choice of: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim. See Interior and Exterior Color Selec-tion Chart for color and trim availability

Steering Wheel: Bright trim on horn button

Trim Panels: Color-keyed molded plastic on windshield pillars

and upper rear quarter panels Visor Mirror: On RH sun visor

SILVERADO/SIERRA CLASSIC MODEL OPTION—RPO YE9 (FOR CREW CAB AND BONUS CAB MODELS)

This option includes all items in the Scottsdale/High Sierra model option plus the additions or substitutions listed below



EXTERIOR

 Bright Appearance Items: "Silverado/Sierra Classic" nameplates, with series designation, on front fenders


Cab back panel applique molding "Chevrolet/GMC letters" nameplate on tailgate applique

Chrome-trimmed grille (Chevrolet models only) Body side and rear moldings with black paint trim (models with single rear wheels only)

Wheel-opening lip moldings with black paint trim (models with single rear wheels only)

Bright applique panel fitted over central area of tailgate with black-trimmed decorative border

- Cab-to-Fender Insulators
- Grille and Headlamp Bezel Paint: Dark argent (Chevrolet); argent/dark argent (GMC)
- Hood Insulator
- Special Headlamps: Rectangular; dual RH and LH

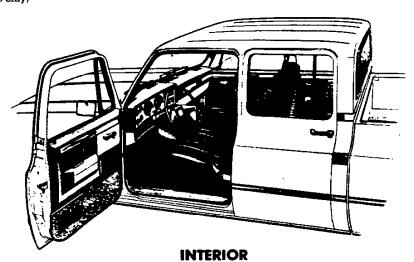

• Bright Appearance Items:

"Silverado/Sierra Classic" nameplate on instrument panel pad MM4 four-speed transmission shift lever (C2-3 models) Trim on door trim panels and horn button

- Cowl Panel Trim: Color-keyed molded plastic on entire surface of cowl side panels
- Door Trim Panels: Special color-keyed molded plastic with ewter-toned brush-finished upper decorative inserts having pewter-toned prush-misned upper decorate a member bright, black, and silver borders; cloth inserts in armrest area; vinyl stowage pockets and door closing assist straps (on front units only); plus carpeting and bright trim strips on lower
- Floor Covering: Color-keyed carpeting. (Except Bonus Cab rear compartment.)
- Instrument Cluster: Voltmeter, oil pressure gage, and engine

temperature gage replace warning lamps; includes pewtertoned brush-finished bezel

- Instrument Panel Pad Applique: Pewter-toned brushed finish with bright, black, and silver trim
- Insulation: Extra-thick insulators for entire front and rear compartment floor areas, except under rear portion of Bonus Cab floor mat
- Seats: Choice of: 1) all-vinyl pigskin grained trim; or 2) textured velour cloth/vinyl trim. See Interior and Exterior Color Se-lection Chart for color and trim availability. NOTE: Crew Cab models have two bench seats-seating for six; Bonus Cab models have one bench seat-seating for three
- Steering Wheel: Bright trim on horn button
- Visor Mirror: On RH sun visor

R/V Pickup—Page F

General Motors Corporation

September, 1986


PICKUP SEAT



STANDARD FULL-DEPTH FOAM SEAT

Molded polyurethane foam pads over a steel cushion spring and frame assembly and a backrest frame assembly provide resilient support for driver and passengers, with an extra-thick pad employed for the cushion. A folding type backrest with inertia latch is used for the Regular Cab front seat and Crew Cab rear seat, providing convenient access to the stowage area behind the seat. Front seats are adjustable fore and aft. Trim is durable, easy-to-clean vinyl.


CAB CONSTRUCTION

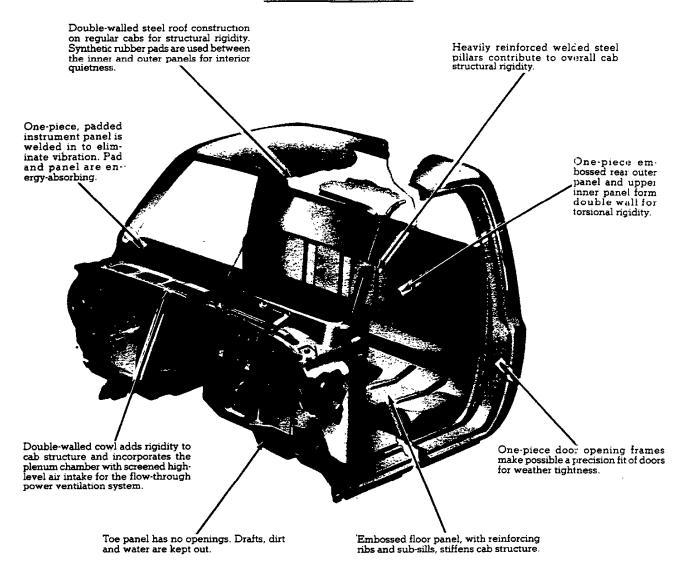


CAB MOUNTINGS

Typical Cab Mount shown.

Both front and rear cab mounts used are the compression-rebound type for quietness and durability.



STANDARD CAB FEATURES

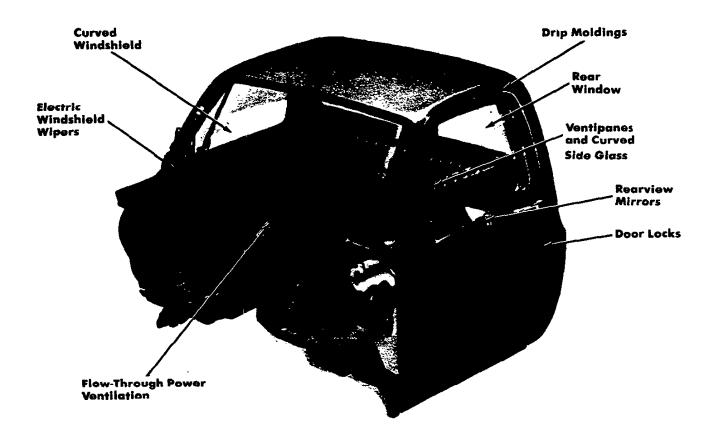

Curved Windshield - The large, one-piece windshield of laminated safety glass has an area of approximately 1421 square inches for excellent visibility.

Rear Window - The rear window is of solid safety glass with a 771 square inch area.

Electric Windshield Wipers - High-capacity, 2-speed motor provides constant wiping action regardless of engine load or accelerator position. Wipers have 16-inch blades. Wiper arms and the metal portions of the blades have a black finish. Electric washers with a 3-pint capacity reservoir are also standard. Dual orifice washer nozzles assure efficient washing action.

Drip Moldings - Bright metal moldings over side doors.

Flow-Through Power Ventilation - With ignition switch on and heater fan switch on, outside air enters the cab through the louvers in the cowl air intake grille between the hood and the windshield—away from road

dust, heat and fumes. The air passes through screened inlets into a plenum chamber built into the cowl, where water is separated from the air and drained out. Air enters the driver compartment through the heater (or optional air conditioning) system and exits through a pressure relief valve in each door. Additional air may be admitted into the interior through two inlets-one on the right side (except with optional air conditioning) and one on the left side of the lower cowl structure. Inlet valves are operated by levers integral with the inlet assemblies.

Ventipanes and Curved Side Glass-Additional flow of outside air can be controlled by a pivot-type ventipane in each front door. Friction-type latches with pushbutton locks and smoothly contoured handles assure excellent sealing and security. Ventipanes, as well as curved door windows, are of solid safety glass with an area of 546 square inches for each side. (Crew Cab and Bonus Cab rear side door glass area-488 sq. in. each.)


Rearview Mirrors - Standard chrome exterior mirrors are of the fixed arm type with 5-7/16" wide x 4" high adjustable heads. Both right-hand and left-hand units are provided. Many optional mirror combinations are also available. See the Optional Equipment


listing for each model.


Door Locks—All cab models include left & right hand key-operated (front) door locks as standard equipment. Depression of inside pushbuttons prevents accidental front and rear door opening and provides keyless front door locking when leaving the vehicle. Door lock key is separate from the ignition key for theft protection.

Identification and Clearance Lights All models with second unit bodies 80" wide or over, or models with dual rear wheels, are equipped with cab identification and clearance lights. See individual model specification pages.

R/V PICKUP CAB DIMENSIONS*







Glass Area (sq. in.)

Windshield

. . . . 1421

.. 470


Front side door window (each side) including


ventipanes


Rear side door window (each side) on Crew Cab.

including fixed window. 488

▲675 sq. in. with sliding rear window.








*All interior dimensions measured with front seat in rearmost position. Seat travel is 5."


INSTRUMENT CLUSTERS

Standard Cluster with warning lights for engine temperature, generator, and oil pressure. Diesel engine models will also have warning lights for glow plugs, low coolant and water-in-fuel (or fuel filter)

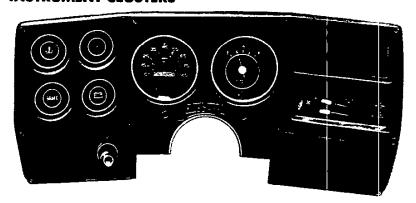

Optional Cluster (RPO 253) with voltmeter, engine temperature gage, and oil pressure gage. Included in Silverado/Sierra Classic model option (RPO YE9) along with bright brush-finished trim, as illustrated. Cluster faceplate for Custom Deluxe/Sierra (Std.) models has black crackle finish. An electric clock (RPO U35), shown at lower left, is available for use with the optional cluster.

Optional air conditioning outlets and radio also shown in illustration.

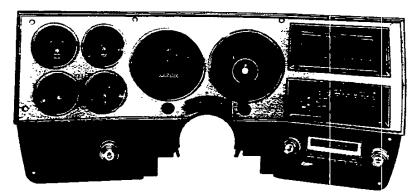


R/V Pickup—Page J


General Motors Corporation

September, 1986

R/V PICKUP FLEETSIDE/WIDESIDE PICKUP BOX

DUAL REAR WHEEL APPLICATION Body Ordering Code E63 DIMENSIONS

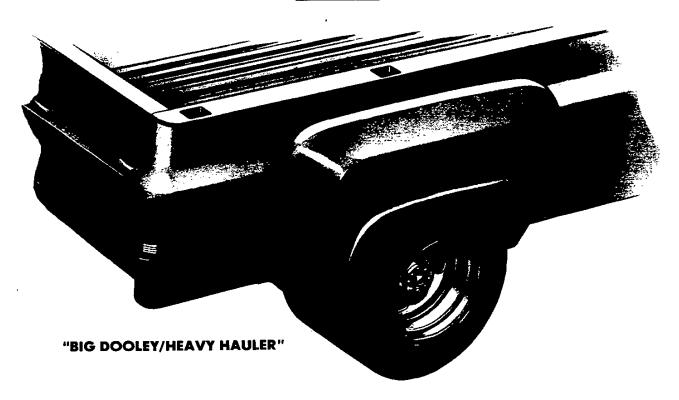

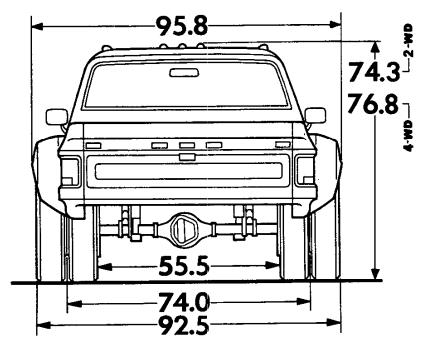

The 8-foot Fleetside/Wideside Pickup Box for dual rear wheel application offers all the features described for single rear wheel application. Additionally, it includes one-piece fenders constructed of fiberglass reinforced plastic bolted to each rear wheelhousing area. This provides an extension to cover the dual rear wheel equipment. Clearance lights are located fore and aft of the wheel openings on the fender extensions. Installation also includes five amber clearance and identification lights mounted on the cab roof along with five red rear clearance and identification lamps mounted on the tailgate (except on Series V30/3500 models where they are standard).

Fleetside/Wideside Pickup Box (Code E63) and dual rear wheels (RPO R05) are available only on models R30903, V30903, R30943, or V30943.

A Dana wider track rear axle is used when dual rear wheels are ordered on Fleetside/Wide-side pickups.

September, 1986


General Motors Corporation

R/V Pickup—Page K

R/V PICKUP FLEETSIDE/WIDESIDE PICKUP BOX

SINGLE REAR WHEEL APPLICATION

Body Ordering Code E63
DIMENSIONS

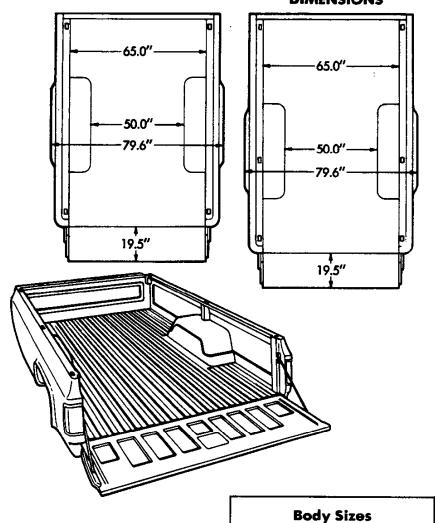

	model
	R10703 V10703
con' to se	R10903 R20903 R20943 V10903 V20903 V30903 R30903 R30943 V30943
	-

Steel Floor

Stake Pocket Dimensions:
All: 2" x 1.38" x 6" deep

73.4"

41.3"

6.5 ft. Box 8 ft. Box

Fleetside/Wideside pickup boxes feature double-walled construction in the side panels and tailgate to prevent load dents from marring the appearance of the outer panels.

All metal body panels are primed for corrosion protection, and the Elpo electro-coating process is used to prime the side panels, tailgate, floor panel, and front panel to assure that all surfaces of these more complicated components—even surfaces not visible—receive a coat of prime paint. Side outer panels and tailgate are fabricated of zinc coated steel and galvanized steel is used for stake pockets, platform panels, and rear wheelhousings to provide additional corrosion protection.

A tight-fitting full-width tailgate holds such loads as grain and sand with minimal loss. It is operated by a mechanically actuated latch and retained in the horizontal position by hinged steel support straps. A quick-release feature allows it to be quickly and easily removed and re-installed by one person. The tailgate latch features one-hand operation for easy opening and closing.

Reinforced pockets (2" z. 1.38") for the addition of stake racks are provided to increase the bulk carrying capacity of the box. On 6.5 ft. bodies there are two pockets on each side; on 8 ft. bodies there are three pockets on each side. See the diagram at right above for location of these stake pockets.

Body

78.2"

98.1"

Volume


58.4 cu ft

74.3 cu ft

R/V PICKUP STEPSIDE/FENDERSIDE PICKUP BOX

Body Ordering Code E62 DIMENSIONS

Stake Pocket Locations

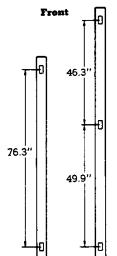

Stake Pocket Dimensions Front & rear: 2" x 1.38" x 6" deep Center (8 ft. box only) 2" x 1.38" x 1.8" deep

6.5 ft. Box 8 ft. Box

Rear

Body Sizes									
Model	Body Length Inside	Volume							
R10703 V10703	78.4"	39.7 cu ft							
R20903 R30903 V20903	98.3"	49.8 cu ft							

0 €17.5"> 79.3" 50.0" Across Fenders 0

The smooth interior walls of the Stepside/ Fenderside pickups are a full 50 inches apart, allowing 4-ft-width materials to be carried easily. In fact, with the 98" body, 4' x 8' sheets can be carried without lowering the tailgate.

Floors are constructed of kiln-dried. sealed wood boards with seven flush steel skid strips bolted in place over the expansion joints. A tight-fitting full-width tailgate minimizes loss of bulk loads such as grain or sand. With the tailgate closed, the wedge-type anti-rattle latches give extra support to the side panels. When open, the tailgate is supported by two strong vinyl covered chains. On each side of the body, Stepside/Fender-

side pickups have a running board and step just forward of the fender. This step is a great convenience in jobs requiring frequent

working of the load from the side.

Reinforced pockets (2" x 1.38") for the addition of stake racks are provided to increase the bulk carrying capacity of the box. On 6.5 ft. bodies there are 2 pockets on each side and on 8 ft. bodies there are 3 pockets on each side. See the diagram at left above for location of these stake pockets.


Side panels, tailgate, and front panel are fabricated of 2-side galvanized steel as are the platform cross sills and skid strips.

All metal body panels are primed for corrosion protection, and the Elpo electrocoating process is used to prime the side panels, tailgate, and front panel to assure that all surfaces of these more complicated components-even surfaces not visiblereceive a coat of prime paint.



Convenient Side Step

A convenient running board and step on each side of the body facilitates working of cargo from the side.

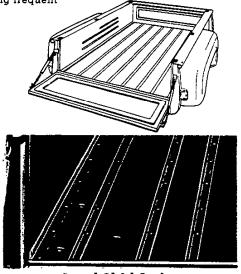

Steel Skid Strips

Seven flush steel skid strips hold floor planks securely, yet allow expansion with changes in temperature and humidity. Recessed bolt heads prevent cargo damage in loading and unloading.

R/V REGULAR CAB PICKUP

INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

Please Note: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available color code 1/color code 2 exterior color combinations are those shown in the chart below; however, any available interior trim color may be ordered with one of these exterior color combinations if that particular combination is desired by the customer.

TRIM LEVEL			T		INT	ERIOR CO	ORS	•	
Seat Type			Decor	Blue	Burgundy	Charcoal	Mahogany	Saddle Tan	
CUSTOM DELUXE/SIERRA						1			
Vinyl Bench Seat			Std.	VDD1	VEE1	VJJ1	VNN1	VSS1	
Deluxe Cioth Bench Seat Custom Vinyl Bench Seat				XDD1	XEE1	CJJ1 XJJ1	CNN1 XNN1	CSS1 XSS1	
SCOTTSDALE/HIGH SIERRA			-	AUU!	VEC.	7001	VIA.	A331	
Deluxe Cloth Bench Seat			Z62	CDD1	CEE1	CJJ1	CNN1	CSS1	
Custom Vinyl Bench Seat				XDD1	XEE1	XJJ1	XNN1	XSS1	
SILVERADO/SIERRA CLASSIC					1				i
Custom Vinyl Bench Seat Custom Cloth Bench Seat			YE9	XDD1	XEE1	XJJ1 LJJ1	LNN1	XSS1	
EXTERIOR COLORS	Two-Tone			2001	LEE.	L 1001	Cidia	LOST	
W/ZY1, ZY2, ZY3, ZY4 PAINT	Available	Color Code 1	Cotor Code 2	REC	OMMENDE	D INTERIO	R TRIM C	OLOR	
BLACK, MIDNIGHT		19	19	9900000	X	Х	x	Х	i
Copper, Canyon (Metallic)	ZY2. ZY4 only	19	55	*****		X	200000	х	
Gold, Nevada (Metallic)	ZY2. ZY4 only	19	67			X		X	
Gray, Steel (Metallic) Tan, Doeskin	All	19	90			×		×	
White, Frost	Att	19 19	61 12		******			anian	
BLUE, LIGHT (Metallic)	F-44	21	21	X		Ŷ			
Blue, Midnight	ZY3 only	21	29	×		latio			
Gray, Steel (Metallic)	ZY3 only	21	90	X					
White, Frost	ZY3 only	21	12	х				تنسسنا	
BLUE, MIDNIGHT		29	29	х	<u> </u>	×			
Blue, Light (Metallic)	ZY2. ZY4 only	29	21	X					
Gray, Steel (Metallic)	Att	29	90	X		 	 		
White, Frost BRONZE, INDIAN (Metallic)	All .	29	12 66	<u>*</u>					
Tan, Doeskin	ZY3 only	66 66	66 61	******			X	X	
White, Frost	ZY3 only	66	12				· ·	×	
COPPER, CANYON (Metallic)		55	55			×	×	x	
Black, Midnight	ZY3 only	55	19			×		- x	
Tan, Doeskin	ZY3 only	55	61					Х	
White, Frost	ZY3 only	55	12				******	X	
GOLD, NEVADA (Metallic)		67	67			×	X	X	
Black, Midnight	ZY3 only	67	19			X		X	
Tan, Doeskin White, Frost	ZY3 only ZY3 only	67 67	61 12					X	
GRAY, STEEL (Metallic)	213 01119	90	90	X	×	×		anêma	
Black, Midnight	All	90	19	ကက်က	môm	Ŷ	******		
Blue, Light (Metallic)	ZY2, ZY4 only	90	21	×		****			
Blue, Midnight	All	90	29	х	*****	2000000	2003000	900000	
Red. Apple	All	90	72	******		X			
White, Frost	ZY3 only	90	12			×		*******	
RED, APPLE		72	72		X	×		X	
Gray, Steel (Metailic) Tan, Doeskin	ZY3 only	72	90 61		X	X		X	
White, Frost	All	72	12		×				
TAN, DOESKIN		61	61			×	×	×	
Black, Midnight	All	61	19			X	******	Х	
Bronze, Indian (Metallic)	ZY2, ZY4 only	61	66	******			Х	х	
Copper, Canyon (Metallic)	ZY2, ZY4 only	61	55	••••••		<u> </u>		х	
Gold, Nevada (Metallic)	ZY2. ZY4 only	61	67		•••••			<u> </u>	
Red. Apple White. Frost	ZY2, ZY4 only All	61 61	12	*****	lančar	 	×	X	
WHITE, FROST						· · · · · · · · · · · · · · · · · · ·	-	x	
Black, Midnight	All	12	12	œŵ.	X	×	landar.	landar	
Blue, Light (Metallic)	ZY2, ZY4 only	12	21	×	leeder	<u>taana</u>	,		
Blue, Midnight	All	12	29	X					
Bronze, Indian (Metallic)	ZY2. ZY4 only	12	66				×	х	
Copper, Canyon (Metallic)	ZY2. ZY4 only	12	55			}::::::::::		х	
Gold, Nevada (Metallic) Gray, Steel (Metallic)	ZY2, ZY4 only	12	67	******			::::::		
Red, Apple	ZY2. ZY4 only All	12	90 72	*****	<u> </u>	lacêa a		(****** **	
Tan, Doeskin	All	12	61	•			×	×	
w/ZY5 or ZY9 PAINT (Interior &									
BLACK, MIDNIGHT/Gray, Steel (19	90		×	X	10000002	2000000	Vermillion/Black
BLACK, MIDNIGHT/Tan, Doeskir	1	19	61	·····	X	X		Х	Vermillion/Black
BLUE, LIGHT (Metallic)/Blue, Mi	dnight	21	29	×				*****	Light Blue/Dark Blue
BLUE, LIGHT (Metallic)/Gray, Ste		21	90	X		<u> </u>			Dark Blue/Light Slate
BLUE, UGHT (Metallic)/White, Fi		21	12	×					Dark Blue/White
BLUE, MIDNIGHT/Gray, Steel (M BRONZE, INDIAN (Metallic)/Tan		29 66	90 61	X	::::::	;;;;;;; ;	×	x	Vermillion/Light State Almond/Dark Brown
COPPER, CANYON (Metallic)/Tar		55	61					×	Almond/Dark Brown
COPPER, CANYON (Metallic)/Wi		55	12				X	X	Almond/Dark Brown
RED, APPLE/Black, Midnight		72	19		Х	X			Vermillion/Black
DED ADDI C/Tee Occalie		72	61		Х			Х	Vermillion/Dark Carmine
RED, APPLE/Tan, Doeskin		72	12	• • • • • •	X			*****	Vermillion/Black
RED, APPLE/White. Frost				*****					
RED, APPLE/White. Frost GRAY, STEEL (Metallic)/Black. M		90	19	******	X	X			Vermillion/ Black
RED, APPLE/White. Frost GRAY, STEEL (Metallic)/Black. M GRAY, STEEL (Metallic)/Blue, Mi	dnight	90 90	19 29	Х		X			Light Blue/Dark Blue
RED, APPLE/White. Frost GRAY, STEEL (Metallic)/Black. M	dnight	90	19					X	

^{*}ZY5 Paint not available with RO5 Dual Rear Wheels, ZY9 Paint requires RO5 Dual Rear Wheels.

R/V BONUS & CREW CAB PICKUP

INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

Please Note: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available color code 1/color code 2 exterior color combinations are those shown in the chart below, however, any available interior trim color may be ordered with one of these exterior color combinations if that particular combination is desired by the customer.

TRIM LEVEL					TERIOR COLO		
Seat Type			Decar	Blue	Burgundy	Saddle Tan	
CUSTOM DELUXE/SIERRA Vinyl Bench Seat			Std	V001	VEE1	VSS1	
SCOTTSDALE/HIGH SIERRA	, , , , , , , , , , , , , , , , , , , ,		-				
Vinyl Bench Seat			Z62	VDD1	VEE1	V\$S1	
Custom Vinyl Bench Seat				LDD1	XEE1	LSS1	
Custom Cloth Bench Seat SILVERADO/SIERRA CLASSIC				100,		- 1331	
Custom Vinyl Bench Seat		1	YE9	XDD1	XEE1	XSS1	
Custom Cloth Bench Seat				LDD1	LEE1	LSS1	
EXTERIOR COLORS w/ZY1, ZY2, ZY3, ZY4 PAINT	Two-Tone Available	Color Code 1	Color Code 2	RECOMMEN	DED INTERIOR	TRIM COLOR	
BLACK, MIDNIGHT		.19	19	***************************************	χ	X	
Copper, Canyon (Metallic)	ZY2, ZY4 only	19	55			x	
Gold, Nevada (Metallic)	ZY2, ZY4 only	19	67			X	
Tan, Doeskin White, Frost	All ZY2, ZY4 only	19	12		X	55555555	
BLUE, LIGHT (Metallic)	212,2110111	21	21	Х	300000000000000000000000000000000000000		
Blue, Midnight	ZY3 only	21	29	×			
Gray, Steel (Metallic)	ZY3 only	21	90	×			
White, Frost	ZY3 only	21	12	X			
BLUE, MIDNIGHT		29	29	Х			
Blue, Light (Metallic)	ZY2, ZY4 only	29	21	X			
Gray, Steel (Metallic)	All	29	90	X X			
White, Frost	All	29				•••••••	
BRONZE, INDIAN (Metallic)	ZY3 only	66 66	66 61			- × -	
Tan, Doeskin White, Frost	ZY3 only	66	12			- x	
COPPER, CANYON (Metallic)	1 1	55	55			x	
Black, Midnight	ZY3 only	55	19	J		X	
Tan. Doeskin	ZY3 only	55	61			X	
White, Frost	ZY3 only	55	12			X	
GOLD, NEVADA (Metallic)		67	67			х	
Black, Midnight	ZY3 only	67	19			Х	
Tan. Doeskin	ZY3 only	67	61			X	
White Frost	ZY3 only	67	12	<u> </u>	************		
GRAY, STEEL (Metallic) Blue, Light (Metallic)	ZY2, ZY4 only	90 90	90 21	X	X	•••••	
Blue, Midnight	All	90	29	Î x			
Red. Apple	ZY2, ZY4 only	90	72	8333333	×		
RED, APPLE		72	72		×	Х	
Gray, Steel (Metallic)	ZY3 only	72	90		X		
Tan, Doeskin	ZY3 only	72	61		×	×	
White, Frost	Alt	72	12		X		, I
TAN. DOESKIN		61	61			X	
Black, Midnight	ZY2, ZY4 only	61	19 66			x	
Bronze, Indian (Metallic) Copper, Canyon (Metallic)	ZY2, ZY4 only	61	55			×	
Gold, Nevada (Metallic)	ZY2, ZY4 only	61	67	1	******	x	
Red. Apple	ZY2, ZY4 only	61	72		Х	Х	•
White, Frost	Ali	61	12	200.000	**********	X	}
WHITE, FROST		12	12	X	X	X	}
Black, Midnight	ZY3 only	12	19		X		
Blue, Light (Metallic)	ZY2, ZY4 only	12	21	X			
Blue, Midnight	All 390 394 anh	12	29	X X		X	
Bronze, Indian (Metallic) Copper, Canyon (Metallic)	ZY2, ZY4 only ZY2, ZY4 only	12	66 55	100000000000000000000000000000000000000	•	- `	
Gold, Nevada (Metallic)	ZY2, ZY4 only	12	67		***********	×	
Red. Apple	All	12	72	<u> </u>	Х	80000000	
Tan, Doeskin	Ali	12	61			Х	
w/ZY5 or ZY9 PAINT (Interior & Exterior	Combinations Shown ar	e the Only C	ombinations	Available)			STRIPE COLOR
BLACK, MIDNIGHT/Gray, Steel (Metallic		19	90		Х	**********	Vermillion/Black
BLACK, MIDNIGHT/Tan, Doeskin		19	61	(COSCOR	X	X	Vermillion/Black
BLUE, LIGHT (Metallic)/Blue, Midnight	44.	21	29	X			Light Blue/Dark Blue
BLUE, LIGHT (Metallic)/Gray, Steel (Metallic)	allic)	21	90	X	**********	{::::::::::	Dark Blue/Light State Dark Blue/Light State
BLUE, LIGHT (Metallic)/White, Frost BLUE, MIDNIGHT/Gray, Steet (Metallic)		29	90	+ ^ -	 	•	Vermillion/Light Slate
BRONZE, INDIAN (Metallic)/Tan, Doeski	n	66	61	Taxabas	* ***********************************	×	Almond/Dark Brown
COPPER, CANYON (Metallic)/Tan, Doesi		55	61	1	}	Х	Dark Brown/Almond
COPPER, CANYON (Metallic)/White. Fro		55	12		**********	X	Almond/Dark Brown
GRAY, STEEL (Metallic)/Black, Midnight		90	19		X	<u> </u>	Vermillion/ Black
GRAY, STEEL (Metallic)/Blue, Midnight		90	29	- X		1	Light Blue/Dark Blue Vermillion/ Black
GRAY, STEEL (Metallic)/Red. Apple RED, APPLE/Black, Midnight	·	72	72 19		X	;;;;;;;;;	Vermillion/Black
RED, APPLE/Tan, Doeskin	· · · · · · · · · · · · · · · · · · ·	72	61	1	x	X	Vermillion/Dark Carmit
RED, APPLE/White, Frost		72	12		X	********	Vermillion/Black
TAN, DOESKIN/Black, Midnight		61	19	********		×	Vermillion/Black
						:} x	Vermillion/Dark Carmir

^{*}ZY5 Paint not available with RO5 Dual Rear Wheels, ZY9 Paint requires RO5 Dual Rear Wheels.


SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below.


Solid color paint (ZY1) is standard on all models. All painted areas of the cab, front end sheet metal, and box are the same color. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except with Frost White, then a black decal is applied. (A bright trim plate covers the lettering on Fleetside/Wideside models when the Silverado/Sierra Classic Model Option is ordered.)



Conventional two-tone (ZY2) consists of color code 1 on cab roof and cab back panel above the belt line, with color code 2 on the remainder of the cab, on the front end sheet metal, and on the pickup box. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except when color code 2 is Frost White, then a black decal is applied. (A bright trim plate covers the lettering on Fleetside/Wideside models when the Silverado/Sierra Classic Model Option is ordered.) Includes cab back panel applique and molding, except with the Silverado/Sierra Classic Model Option where it is already included.

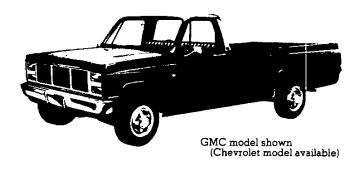

Special two-tone (ZY3) paint colors are available only on single rear wheel Fleetside/Wideside Pickup models and include the YG1 molding package consisting of black vinyl body side and rear moldings with bright trim, bright wheel opening moldings, and bright trim for front side marker lights and tail lights (except with the YG3 molding package or the Silverado/Sierra Classic Model Option where bright body side and rear moldings with black paint trim are substituted). Color code 1 is applied to the areas above the moldings (including the cab roof). Color code 2 is applied to the areas below the moldings. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except when color code 1 is Frost White, then a black decal is applied. (A bright trim plate covers the lettering when the Silverado/Sierra Classic Model Option is ordered.)

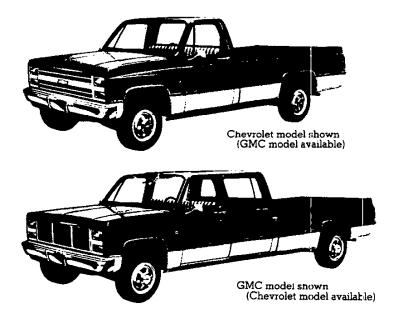

*Optional at extra cost
General Motors Corporation

R/V Pickup-Page P

September, 1986

SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below.

Deluxe two-tone (ZY4) paint colors are available only on single rear wheel Fleetside/Wideside Pickup models and include the YG1 molding package consisting of black vinyl body side and rear moldings with bright trim, bright trim for front side marker lights and tail lights (except with the YG3 molding package or the Silverado/Sierra Classic Model Option where bright body side and rear moldings with black paint trim are substituted). Also includes cab back panel applique and molding (except with Silverado/Sierra Classic Model Option where it is included). The cab roof, cab back panel above the belt line, and the area below the moldings are painted color code 1 with color code 2 applied on all other areas. A white decal is applied to the raised "Chevrolet/GMC" lettering on the tailgate, except when color code 2 is Frost White, then a black decal is applied. (A bright trim plate covers the lettering when the Silverado/Sierra Classic Model Option is ordered.)





SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below.

Exterior Decor Package (ZY5) paint colors and trim are available only on single rear wheel Fleetside/ Wideside pickup models (see Interior and Exterior Color Availability Chart). The package includes the moldings described under Special Two-Tone. In addition, it includes dual-tone body side and rear tape decal striping keyed to the exterior body color. This striping is applied to the front fenders, side doors and pickup box sides and tailgate a few inches above the styling crease line.

ing crease line.

The areas above the striping and below the moldings are painted color code 1. Color code 2 is used between the striping and the molding. A bright spring-loaded, stand-up type hood ornament is included on gasoline engine models.

engine models.

When used with the Silverado/
Sierra Classic Model Option, the cab
back panel applique and molding
included with this model is deleted.




Special Big Dooley/Heavy Hauler two-tone (ZY9) paint colors are available only on Fleetside/ Wideside Pickup models with dual rear wheels (see Interior and Exterior Color Availability Chart). The package includes dual-tone body side and rear tape decal striping keyed to the exterior body color. This striping is applied to the front fenders, side doors and pickup box sides and tailgate a few inches above the styling crease line.

crease line.

The areas above the striping are painted color code 1, and the areas below are painted color code 2. A bright, spring-loaded, stand-up type hood ornament is included on gasoline engine models. Bright trim for front side marker lamps, rear wheel opening extension clearance lamps, and tail lamps also is included for standard Custom Deluxe/Sierra models.

models.
When used with the Silverado/
Sierra Classic Model Option, the cab
back panel applique and molding
included with this model is deleted.

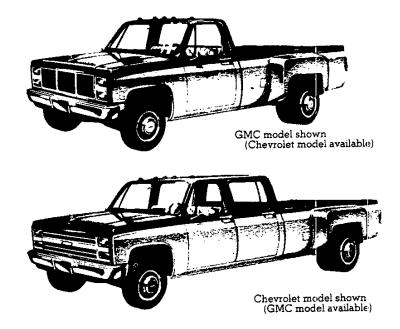

*Optional at extra cost

VALUE DECOR PACKAGE



YJ6 VALUE DECOR PACKAGE (R/V Fleetside/Wideside Regular-Cab Pickups with single rear wheels only)

The Value Decor striping package is available in four colors, and requires ZY1 solid paint. See the chart below for color availability. The stripes are applied a few inches above the styling crease line on the front fenders, side doors and pickup box sides and tailgate. The bottom stripe is 1½" wide and the three upper ½" stripes are separated by a ½" clear space which allows the exterior paint color to show through between them. Includes a blacked-out grille and head-lamp bezel treatment on all models and Rally wheels on R/V 10/1500 models. Not available with YE9 Silverado/Sierra Classic Trim, R05 Dual Rear Wheels or body side moldings.

YJ6 COLOR AVAILABILITY CHART

			Available Stripe Colors					
Exterior Color	Primary	Secondary	White 12A	Red 72Ā	Blue 29Å	Black 19A		
Black, Midnight	19	19	Х	Х				
Blue, Light (Metallic)	21	21	х		х	Х		
Blue, Midnight	29	29	Х		Х			
Bronze, Indian (Metallic)	66	66	х					
Copper, Canyon (Metallic)	55	55	х			х		
Gold, Nevada (Metallic)	67	67	Х	Х		Х		
Gray, Steel (Metallic)	90	90	Х	Х	х	Х		
Red, Apple	72	72	х			х		
Tan, Doeskin	61	61	х	Х		х		
White, Frost	l2	12		Х	X	Х		

NOTES



1987 GENERAL MOTORS CONSUMER INFORMATION GUIDE FOR GENERAL MOTORS PASSENGER CARS AND LIGHT DUTY TRUCKS













Note to Prospective New Vehicle Buyers

The information contained in this booklet is published in compliance with the National Highway Traffic Safety Administration Act.

General Motors Corporation reserves the right to change the specifications during the model year. There may be variances between the information contained in this booklet and the information provided with the new vehicle you select. Please refer to the Warranty and Consumer Information materials which come with the new vehicle for information specific to that vehicle.

VEHICLE STOPPING DISTANCES

The following tables give stopping distances under four different braking conditions. All GM models listed will have stopping distances equal to or better than the reported figures.

These figures represent stopping distances from 60 mph by limiting the force on the brake pedal to 150 lbs. as specified in the Consumer Information Regulation 575.101. Stopping distances may be shorter than those reported when pedal force in excess of 150 lbs, is applied.

Fully Operational Service Brake

A fully operational service brake system is the regular braking system that applies the brakes to all four wheels. The figures represent the stopping distances recorded under light and maximum load.

Light load includes the normal weight of the car, oil, coolant, and a full tank of gas plus 300 lbs, allowance for driver and passenger.

Maximum load is GM's recommended full-rated load. It includes oil, coolant, full tank of gas and all optional equipment that weighs over

5 lbs. plus the passenger and luggage load listed on the tire placard. (The placard is located on the rear face of the driver's door.)

Emergency Service Brake System

The emergency service brake system means that only a portion of the fully operational service brake system is in operation. A red light in the instrument panel indicates when this condition exists. The figure represents the most adverse condition, whether at light or maximum loads, when two of the four service brakes are purposely deactivated.


Brake Power Unit Failure

The figure applies only to cars equipped with power brakes and represents the stopping distance recorded under maximum load after purposely deactivating the power assist unit. Brake power unit failure means the loss of power assist only and does not imply the loss of ability to stop the car. However, in case of power assist failure, it does require more force on the brake pedal to stop than it does to stop a car equipped with non-powered brakes.


NOTICE: These tables indicate braking performance that can be met or exceeded by the vehicles to which each table applies under different conditions of loading and with partial failures of the braking system. The information presented represents results obtainable by skilled drivers under controlled road and vehicle conditions, and the information may not be correct under other conditions.

FORMS GMMS 3019

YEHICLE STOPPING DISTANCES (Cont'd.)

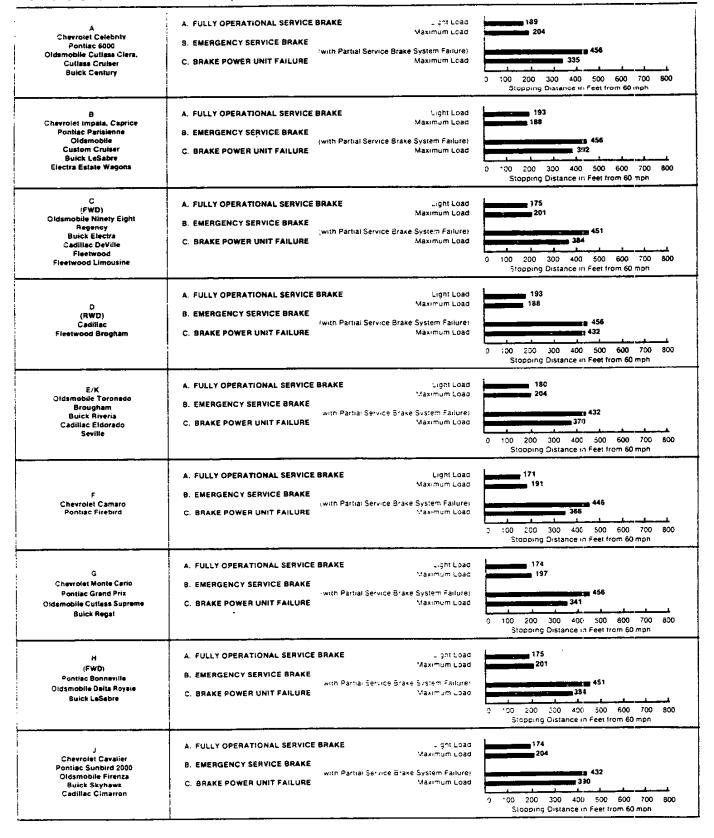

YEHICLE STOPPING DISTANCES (Cont'd.)

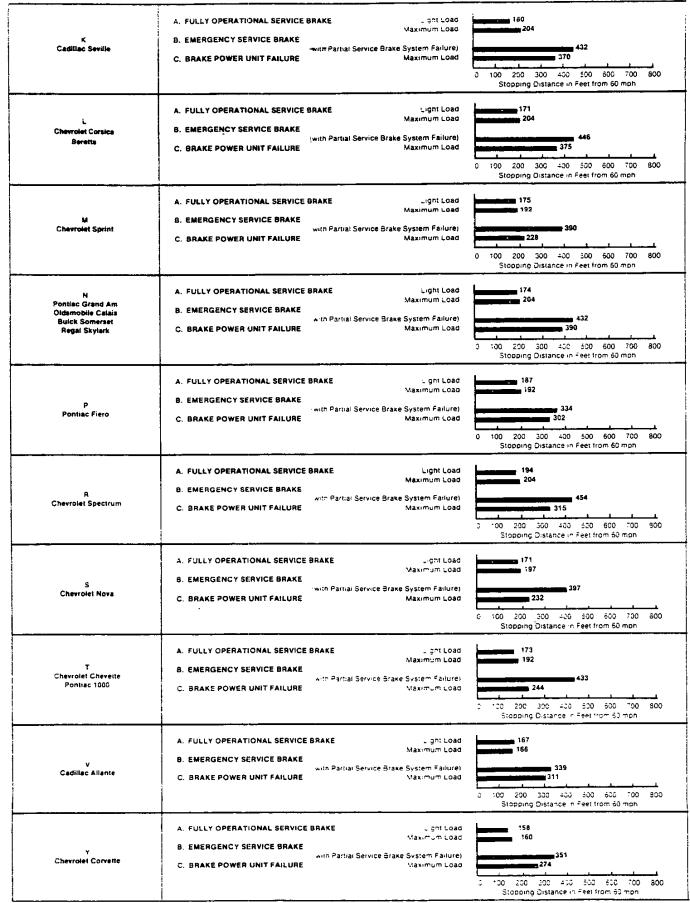

UNIFORM TIRE QUALITY GRADING

The following information relates to the tire grading system developed by the National Highway Traffic Safety Administration which will grade tires by traction and temperature performance:

TREADWEAR

The treadwear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course. For example, a tire graded 150 would wear one and a half (1½) times as well on the government course as a tire graded 100. The relative performance of tires depends upon the actual conditions of their use, however, and may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

TRACTION - A B C

The traction grades, from highest to lowest are: A, B, and C, and they represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete. A tire marked C may have poor traction performance.

WARNING: The traction grade assigned to this tire is based on braking (straight ahead) traction tests and does not include cornering (turning) traction.

TEMPERATURE - A B C

The temperature grades are A (the highest), B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel. Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure. The grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109. Grades B and A represent higher levels of performance on the laboratory test wheel than the minimum required by law.

WARNING: The temperature grade for this tire is established for a tire that is properly inflated and not overloaded. Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.

These grades will be molded on the sidewalls of passenger car tires.

WHILE THE TIRES AVAILABLE AS STANDARD OR OPTIONAL EQUIPMENT ON GENERAL MOTORS VEHICLES MAY VARY WITH RESPECT TO THESE GRADES, ALL SUCH TIRES MEET STRINGENT GENERAL MOTORS PERFORMANCE STANDARDS AND HAVE BEEN APPROVED FOR USE ON GENERAL MOTORS VEHICLES. ALL PASSENGER CAR TIRES MUST CONFORM TO FEDERAL SAFETY REQUIREMENTS IN ADDITION TO THESE GRADES.

Additional Copies Of This Guide May Be Obtained By Writing:

GM Photographic 31752 Enterprise Dr. Livonia, Mi 48150 ATTN: "Consolidated Warranty"