




MOTOR HOME CHASSIS

MOTOR HOME CHASSIS MODEL SELECTOR

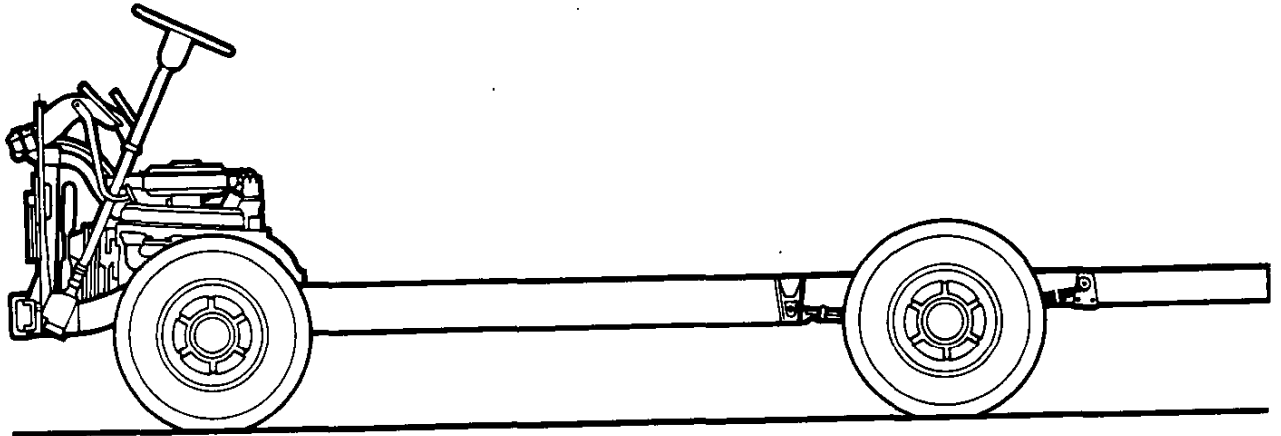

SERIES	MODEL NUMBER				BODY ORDERING CODE
	125" WB	137" WB	158½" WB	178" WB	
P30	CP30832	CP31132	CP31432	CP31832	ZW9

MOTOR HOME CHASSIS

EXTERIOR FEATURES—STANDARD MODELS

The Standard models include the following items as standard equipment.

Color: Chassis and components painted black

Front Frame Member: Heavy channel reinforcement; painted black

Horn: Single; low note; electric

Hub Caps: Painted white with black and ochre trim (except CP31832)

Instruments:

Gauges: Speedometer, odometer, generator, oil pressure, engine temperature and fuel

Switches: Exterior lamps; instrument lamps; headlamp beam (foot); ignition; direction signal with lane change position; and hazard warning

Warning lamps: brake system warning, direction signals and high beam.

NOTE: Ignition, direction signal, and hazard warning switches are installed; all other gauges, switches and warning lamps are furnished loose in parts box

Lights: Furnished loose in parts box

Combination parking/direction/hazard: Two front

Headlamps: Two; Power Beam

Instrument cluster

Steering Wheel: 16" diameter; 2-spoke

Tilt Steering Column: Lever adjusting control (6-position)

Tools: Wheel wrench

Wheels: Painted black


MOTOR HOME CHASSIS

125" WB

137" WB

158½" WB

178" WB

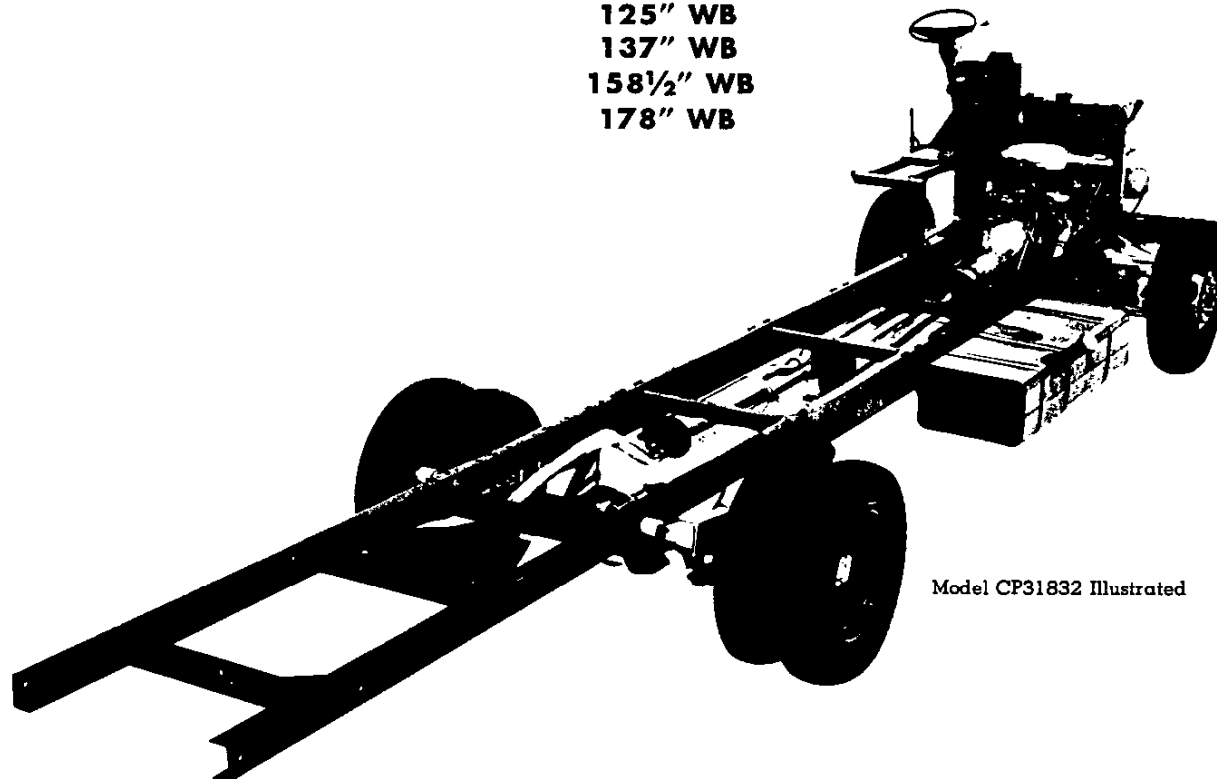

Model CP31832 Illustrated


MOTOR HOME CHASSIS

STANDARD SPECIFICATIONS

(See Blue Tab Section for Specification Details)

Model	CP30832, CP31132, CP31432	CP31832
Engine	350 4-bbl. V8	454 4-bbl. V8
Air Filter	Polyurethane-wrapped Oiled-paper	
Oil Filter	Throwaway Type; 1-qt.	
Oil Cooler	Standard	
Exhaust System	Dual; Aluminized	
Emission Control Systems	See Engine & Cooling, page 30, for specific model applications	
Suspension, Front	Independent	
Type	Coil Springs	Coil Springs with Auxiliary Air Springs
Capacity	4300 lb.	5000 lb.
Springs @ Ground	2200 lb. ea.	2500 lb. ea.
Shock Absorbers	1" dia.	1.37" dia.
Stabilizer Bar	1.25" dia.	1.25" dia.
Suspension, Rear	Hypoid; Leaf Springs	
Axle Capacity	7500 lb.	10,000 lb.
Axle Ratio	4.10	4.56
Springs, Main @ Ground	3100 lb. ea.	4750 lb. ea.
Shock Absorbers	1" dia.	1.37" dia.
Stabilizer Bar	1.06" dia.	1.75" dia.
Brakes	Hydraulic; Self-adjusting	
Front	Disc; 12.5" Rotor	Disc; 14.25" Rotor
Rear	Drum; 13" x 3.5"	Drum; 15" x 4"
Booster	Hydro-Boost	Hydro-Boost
Parking	Cable to rear wheels	Prop Shaft
Electrical	12 Volt; Negative Ground	
Battery	80 amp.-hr.; 4000 watts @ 0°F.	
Delcotron Generator	61 amp.	
Frame	Carbon Steel; 39,000 psi	
Section Modulus	125, 137" WB-5.26 158.5" WB-6.12	6.12
Fuel Tank (nominal capacity)		
Permanent	30 gal.	50 gal.
Temporary	5 qt.	5 qt.
Steering	Integral Power; Tilt Wheel	
Transmission	3-Speed Automatic	
Model	Turbo Hydra-matic 400	Turbo Hydra-matic 475
Oil Cooler	Standard; Integral with Radiator	
Tires	Tubeless	
Front	(2) 8.75-16.5C(6PR)	(2) 8-19.5D(8PR)
Rear	(2) 8.75-16.5D(8PR)	(4) 8-19.5D(8PR) (Dual)
Wheels	(4) 16.5" x 6"	(6) 19.5" x 6.75"

MOTOR HOME CHASSIS

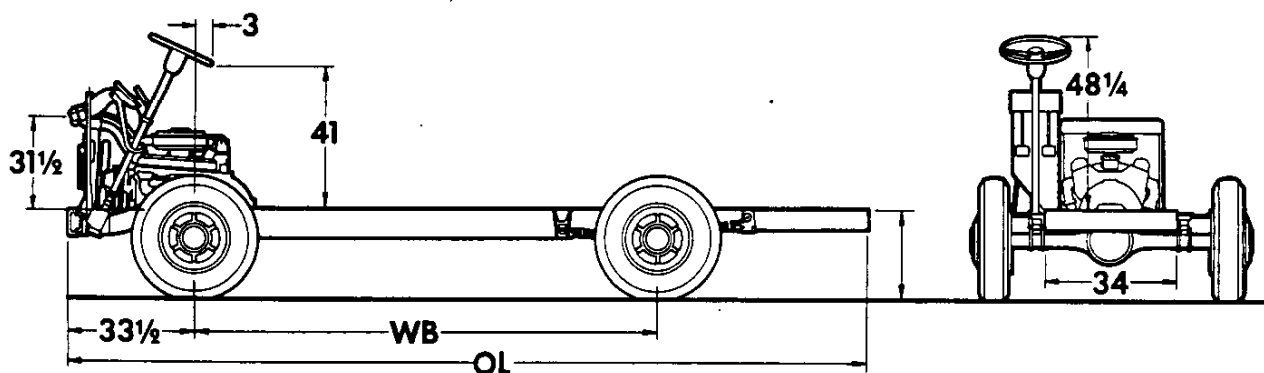

Model	Engine No. Cyl.	Body Length (ft.)	Dimensions (in)★		Curb Weights (lb)			Ground Clearance (in)★	
			WB	OL	Front	Rear	Total	Front	Rear
CP30832	8	18-20	125	207¼	2159	1248	3407	8	7
CP31132	8	21-23	137	235¼	2164	1273	3437	8	7
CP31432	8	24-26	158½	256½	2209	1336	3545	8	7
CP31832	8	26-28	178	321½	2459	2265	4724	10½	9

★ Dimensions with standard equipment, unloaded.

GVW SELECTOR

†Maximum Ratings		Minimum Equipment Required for GVW Rating				
GVW Rating (lb)	ΔGAWR (lb)		Tires, Front	Tires, Rear	Chassis Equipment	
	Front	Rear				
7600	3980	4700	8.75-16.5C(6PR) (TL)	8.75-16.5D(8PR) (TL)	Standard	
	4120	4880	7.50-16C(6PR) (TB)	7.50-16D(8PR) (TB)		
9800	4300	5560	9.50-16.5D(8PR) (TL)	9.50-16.5D(8PR) (TL)	Standard	
			7.50-16D(8PR) (TB)	7.50-16E(10PR) (TB)		
10,500	4300	6200	9.50-16.5D(8PR) (TL)	9.50-16.5E(10PR) (TL)	HD Rear Stabilizer Bar (G69)	
			8.75-16.5D(8PR) (TL)	8.75-16.5C(6PR) Dual (TL)		
			7.50-16D(8PR) (TB)	7.50-16C(6PR) Dual (TB)		
11,000	5000	6200	8.75-16.5E(10PR) (TL)	8.75-16.5C(6PR) Dual (TL)	HD Front Suspension (F66); HD Rear Stabilizer Bar (G69)	
	4880		7.50-16D(8PR) (TB)	7.50-16C(6PR) Dual (TB)		
11,800	4300	7500	7.50-16D(8PR) (TB)	7.50-16D(8PR) Dual (TB)	HD Rear Springs (G50); HD Rear Stabilizer Bar (G69)	
12,300	4880	7500	7.50-16D(8PR) (TB)	7.50-16D(8PR) Dual (TB)	HD Front Suspension (F66); HD Rear Springs (G50); HD Rear Stabilizer Bar (G69)	
12,500	5000	7500	8.75-16.5E(10PR) (TL)	8.75-16.5D(8PR) Dual (TL)		
*14,000 (158½" and 178" WB models only)	5000	9500	*8-19.5D(8PR)	*8-19.5D(8PR) Dual (TL)	● *10,000-lb Rear Axle (*HF7 or HF8); *454 4-bbl V8 (LF8); *50-gal Fuel Tank (N20) *HD Rear Stabilizer Bar (G69)	

†GAWR's shown are the maximum for each axle. When ordering a truck the total of the actual weight on both front and rear axles cannot exceed the total GVW rating.

ΔGAWR—Gross Axle Weight Rating. TL—Tubeless. TB—Tube Type. *Standard on 178" WB model.

● 10,000-lb rear axle (RPO HF7 or HF8 for model CP31432) includes 5000-lb Positrim front suspension; THM-475 Hydra-matic transmission, and HD brakes.

MOTOR HOME CHASSIS FRONT AND REAR TIRE AVAILABILITY CHART

**125", 137" OR 158.5" WHEELBASE MOTOR HOME CHASSIS
(With 7500-lb Rear Axle)**

FRONT		REAR			
Description	Option Number	Description		Option Number	
	Highway	Single Rear	Dual Rear	Highway	On-Off Road
TUBELESS					
8.75-16.5/C	TC ♦	8.75-16.5/D	—	TE ♦	TF
		—	8.75-16.5/C	TC	TB
8.75-16.5/D	TE	8.75-16.5/D	8.75-16.5/D	TE	TF
		—	8.75-16.5/C	TC	TB
8.75-16.5/E	TH	—	8.75-16.5/D	TE	TF
		—	8.75-16.5/E	TH	TJ
		9.50-16.5/D	—	UD	UE
9.50-16.5/D	UD	9.50-16.5/E	—	UG	UH
9.50-16.5/E	UG	9.50-16.5/E	—	UG	UH
TUBE-TYPE					
7.50-16/C	PB	7.50-16/D	—	PF	PG
		7.50-16/E	—	PK	PL
		—	7.50-16/C	PB	PC
7.50-16/D	PF	7.50-16/D	7.50-16/D	PF	PG
		7.50-16/E	—	PK	PL
7.50-16/D (Orig. Eqpt.)	PE	7.50-16/D	7.50-16/D	PE	—
7.50-16/E	PK	7.50-16/E	—	PK	PL

158.5" WHEELBASE MOTOR HOME CHASSIS (With 10,000-lb Rear Axle)

FRONT		REAR			
Description	Option Number	Description		Option Number	
	Highway	Single Rear	Dual Rear	Highway	On-Off Road
TUBELESS					
8-19.5/D	SF	—	8-19.5/D	SF	SE
		—	8-19.5/E	SG	—
8-19.5/D	SN	—	8-19.5/D	SN	—
8-19.5/E	SG	—	8-19.5/E	SG	—

178" WHEELBASE MOTOR HOME CHASSIS

FRONT		REAR			
Description	Option Number	Description		Option Number	
	Highway	Single Rear	Dual Rear	Highway	On-Off Road
TUBELESS					
8-19.5/D	SF ♦	—	8-19.5/D	SF	SE
		—	8-19.5/E	SG	—
8-19.5/D	SN	—	8-19.5/D	SN	—
8-19.5/E	SG	—	8-19.5/E	SG	—

♦ Base tire on this series.

MOTOR HOME CHASSIS

POWER TEAMS

ENGINE	TRANSMISSION	REAR AXLE	
Type and Code	Type and Code	Make and Capacity (lb)	Ratio and Code

125", 137" OR 158.5" WHEELBASE MODELS ONLY

			4.10 GT5	4.56 HC4	4.56 HF7	4.88 HF8
■ 350 4-bbl V8—LS9 (Standard)	Turbo Hydra-matic (Std)—M40 Single Rear Wheels	Chevrolet 7500♦	X(Std)	X	—	—
	Dual Rear Wheels		X	X(Std)	—	—
■ 454 4-bbl V8—LF8	Turbo Hydra-matic (Std)—M40 Single Rear Wheels	Chevrolet 7500♦	X(Std)	X	—	—
	Dual Rear Wheels		X	X(Std)	—	—
	Turbo Hydra-matic (THM475)—M40 Dual Rear Wheels	Chevrolet 10,000★	—	—	X(Std)	X

178" WHEELBASE MODEL ONLY

			4.56 HF7	4.88 HF8
■ 454 4-bbl V8—LF8 (Standard)	Turbo Hydra-matic (THM475)—M40 Dual Rear Wheels	Chevrolet 10,000	X(Std)	X

■ Available for registration in the State of California when California Emission Certification is ordered.

♦ Locking Differential rear axle also available.

★ 10,000-lb capacity axle instead of standard 7500-lb axle is available only on 158.8" wheelbase model with 14,000-lb GVW.

ENGINE RATINGS

SAE Net Ratings @ 85°F	350 4-bbl V8	454 4-bbl V8
Net Horsepower.....	160 @ 3800 rpm	245 @ 4000 rpm
Net Torque, lb-ft.....	250 @ 2400 rpm	+355 @ 3000 rpm

+375 @ 2800 rpm for California only.

MOTOR HOME CHASSIS (7600-lb—14,000-lb GVW)

1975 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with production of 1975 Vehicles

Description	Model Number	Code	Wheel-base	Factory D&H†	List Price	Mfr's Suggested Retail Price*	Destination Charge & Group Number	Total
◆ 8-Cylinder 350-4 BBL Engine—Engine Ordering Code LS9								
Motor Home Chassis	CP30832	ZW9	125"	15.58	3856.00	3871.58	29	_____
Motor Home Chassis	CP31132	ZW9	137"	15.58	3888.00	3903.58	29	_____
Motor Home Chassis	CP31432	ZW9	158.5"	15.58	3924.00	3939.58	29	_____
◆ 8-Cylinder 454-4 BBL Engine—Engine Ordering Code LF8								
Motor Home Chassis	CP31832	ZW9	178"	27.30	5217.00	5244.30	29	_____

* Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, options or accessories.
 ◆ Refer to Power Team Chart for California Emission Certification Requirements.

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Prices shown are effective with production of 1975 Vehicles

Description	Added Weight (F) (R)	Option Number	Factory D&H†	List Price	Mfr's Suggested Retail Price◇
-------------	----------------------	---------------	--------------	------------	-------------------------------

POWER TEAMS AND AXLES

(See Power Teams Chart for availability and complete specifications)

Engine: 454-4 BBL V8. Standard on 178" wheelbase.	170	38	LF8	N.C.	258.00	258.00
Liquid Petroleum Gas Conversion: All 1975 Chevrolet Light Duty Truck gasoline production engines may be converted to use LP Gas when permissible under Federal and State laws and regulations without causing harmful effect to the engine. Complete conversion to LPG requires adaptation by a local distributor who sells and services LPG equipment. Caution should be exercised so that the fuel tank is mounted on end and is vented to the outside of the vehicle. In addition, vehicles converted to LPG should not be stored in enclosed places such as garages.						
Axles, Rear:						
Optional Ratio. (See Power Teams Chart for option number selection, availability and complete specifications)	0	0	...	N.C.	14.00	14.00
Capacity 10,000-lb. Standard on 178" wheelbase. 158.5" wheelbase available only when LF8 454-4 BBL engine. N20 50-gallon fuel tank and SE, SF, SG or SN 8-19.5 /D tires are specified. Includes HD brakes, M40 Turbo Hydra-matic AT475 transmission, 5000-lb capacity Positrim front suspension, 4750-lb each capacity rear springs, F51 HD front and rear shock absorbers and propeller shaft mounted parking brake.						
4.56 Ratio	18	421	HF7	N.C.	750.00	750.00
4.88 Ratio	18	421	HF8	N.C.	750.00	750.00
Locking Differential. Not available on 178" wheelbase or when 10,000-lb rear axle is specified	0	4	G80	N.C.	145.00	145.00

OTHER OPTIONS

Air Conditioning Provision: Includes condenser, receiver dehydrator, Cool-Pac evaporator and Freon lines with quick connect fittings	69	2	C60	N.C.	399.00	399.00
California Emission Certification: Includes all testing, equipment and /or certification necessary for registration in the State of California. See Power Teams Chart for availability and complete specifications	8	-11	YF5	N.C.	75.00	75.00
Headlamp Warning Buzzer.	0	0	T63	N.C.	4.00	4.00
Plate: Serial Number (State of Pennsylvania) "K" Plate. 125", 137" or 158.5" wheelbase only. Available only when R05 dual wheels, G50 rear spring and PF 7.50-16 /D or larger front tires or HF7 or HF8 axles are specified.	0	0	Z55	N.C.	N.C.	N.C.
178" wheelbase only	0	0	Z55	N.C.	N.C.	N.C.

† D&H amounts reflect provision for pass through of tire weight tax imposed on manufacturer or importer of tires.

◇ State and local taxes not included.

MOTOR HOME CHASSIS

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Prices shown are effective with production of 1975 Vehicles

Description	Added Weight (F) (R)		Option Number	Factory D&H [§]	List Price	MTR's Suggested Retail Price [◇]
OTHER OPTIONS						
Shock Absorbers: Front and Rear, Heavy-Duty. Standard on 178" wheelbase. Included when HF7 or HF8 10,000-lb rear axle is specified.						
	3	4	F51	N.C.	18.00	18.00
Springs: Rear, Heavy-Duty. Capacity 3750-lb each. Not available on 178" wheelbase or when HF7 or HF8 10,000-lb rear axle is specified. See <i>Tire Availability Chart for applications</i>						
	0	17	G50	N.C.	21.00	21.00
Stabilizer: Rear, Heavy-Duty. Standard on 178" wheelbase.						
	0	30	G69	N.C.	27.00	27.00
Suspension: Positrim.						
<i>Front.</i> Standard on 178" wheelbase. Included when HF7 or HF8 10,000-lb rear axle is specified.						
	1	0	F65	N.C.	55.00	55.00
<i>Front, Heavy-Duty.</i> Not available on 178" wheelbase. Available only when G50 rear springs and R05 dual rear wheels are specified See <i>Tire Availability Chart for applications</i>						
	1	0	F66	N.C.	107.00	107.00
Tank, Fuel: Approximately 50-gallon capacity. Replaces production fuel tank. Standard on 178" wheelbase. Not available on 125" wheelbase.						
	55	74	N20	N.C.	71.00	71.00
	67	62	N20	N.C.	71.00	71.00
Tires and Wheels: See following pages						
Wheel Trim: Wheel Covers, Bright Metal. Available only when PB, PC, PF, PG or PE 7.50-16 /C or D dual rear wheels are specified. Not available on 178" wheelbase or when HF7 or HF8 10,000-lb rear axle is specified.						
	4	4	P01	N.C.	30.00	30.00
Wheels, Dual Rear: Available only when G69 HD rear stabilizer is specified. Includes dual rear chassis provisions and rear axle ratio as reflected on Power Teams Chart.						
	20	1	R05	N.C.	N.C.	N.C.

[§] D&H amounts reflect provision for pass through of tire weight tax imposed on manufacturer or importer of tires.
[◇] State and local taxes not included.

MOTOR HOME CHASSIS

FACTORY INSTALLED TIRES (WITH 7500-lb REAR AXLE)

See Tire Compatibility Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.
Prices shown are effective with production of 1975 Vehicles

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H [§]	List Price	Mfr's Suggested Retail Price [◇]
WIDE BASE TUBELESS TIRES USED WITH SINGLE REAR WHEELS						
8.75-16.5 /C (6 PR) Maximum Tire Capacity (Each)— Front (1990)						
Highway Nylon						
Front (Standard)	6.00	0 0	XTC	N.C.	N.C.	N.C.
Spare	6.00	-14 78	ZTC	3.76	90.00	93.75
8.75-16.5 /D (8 PR) Maximum Tire Capacity (Each)— Front (2350) Rear (2350)						
Highway Nylon						
Front	6.00	0 0	XTE	.54	22.20	22.74
Rear (Standard)	6.00	0 0	YTE	N.C.	N.C.	N.C.
Spare	6.00	-15 83	ZTE	4.03	98.90	102.93
On-Off Road Nylon						
Rear	6.00	0 -2	YTF	.54	24.30	24.84
Spare	6.00	-15 82	ZTF	4.30	111.05	115.35
9.50-16.5 /D (8 PR) Maximum Tire Capacity (Each)— Front (2780) Rear (2780)						
Highway Nylon						
Front	6.75	33 0	XUD	1.60	57.00	58.60
Rear	6.75	0 26	YUD	1.06	28.00	29.06
Spare	6.75	-18 99	ZUD	4.56	118.00	122.56
On-Off Road Nylon						
Rear	6.75	0 32	YUE	1.70	52.00	53.70
Spare	6.75	-19 103	ZUE	4.88	130.00	134.88
9.50-16.5 /E (10 PR) Maximum Tire Capacity (Each)— Front (3170) Rear (3170)						
Highway Nylon						
Front	6.75	37 0	XUG	1.98	118.00	119.98
Rear	6.75	0 30	YUG	1.44	96.00	97.44
Spare	6.75	-19 102	ZUG	4.75	128.00	130.75
On-Off Road Nylon						
Rear	6.75	0 26	YUH	1.86	120.00	121.86
Spare	6.75	-18 99	ZUH	4.96	138.00	142.96

[§] D&H amounts reflect provision for pass through of tire weight tax imposed on manufacturer or importer of tires.
[◇] State and local taxes not included.

MOTOR HOME CHASSIS

FACTORY INSTALLED TIRES (WITH 7500-lb REAR AXLE)

See Tire Compatibility Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.
Prices shown are effective with production of 1975 Vehicles

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H [‡]	List Price	Mfr's Suggested Retail Price [◇]
TUBE-TYPE TIRES WHEN USED WITH SINGLE REAR WHEELS						
7.50-16 /C (6 PR) Maximum Tire Capacity (Each)— Front (2060)						
Highway Nylon						
Front	6.50	28 0	XPB	(-.08)	23.00	22.92
Spare	6.50	-18 98	ZPB	3.72	88.40	92.12
7.50-16 /D (8 PR) Maximum Tire Capacity (Each)— Front (2440) Rear (2140)						
Highway Nylon						
Front	6.50	30 0	XPF	.46	34.00	34.46
Rear	6.50	0 22	YPF	(-.08)	18.00	17.92
Spare	6.50	-18 98	ZPF	3.99	91.80	95.79
On-Off Road Nylon						
Rear	6.50	0 40	YPG	.80	48.90	47.70
Spare	6.50	-20 109	ZPG	4.43	106.25	110.68
7.50-16 /D (8 PR) Maximum Tire Capacity (Each)— Front (2440) Rear (2140)						
Highway Polyester						
Front	6.50	26 0	XPE	.70	45.90	46.60
Rear	6.50	0 28	YPE	.16	29.90	30.06
Spare	6.50	-17 96	ZPE	4.11	97.75	101.86
7.50-16 /E (10 PR) Maximum Tire Capacity (Each)— Front (2780) Rear (2780)						
Highway Nylon						
Front	6.50	28 0	XPK	1.62	59.70	61.32
Rear	6.50	0 22	YPK	1.08	44.80	45.88
Spare	6.50	-18 99	ZPK	4.57	107.70	112.27
On-Off Road Nylon						
Rear	6.50	0 32	YPL	1.66	68.50	70.18
Spare	6.50	-19 105	ZPL	4.86	124.50	129.36

[‡] D&H amounts reflect provision for pass through of tire weight tax imposed on manufacturer or importer of tires.
[◇] State and local taxes not included.

MOTOR HOME CHASSIS

FACTORY INSTALLED TIRES (WITH 7500-lb REAR AXLE)

*See Tire Compatibility Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.
Prices shown are effective with production of 1975 Vehicles*

Tire Size Type	Rim Width Included in Tire Option	Added Weight (F) (R)	Option Number	Factory D&H ¹	List Price	Mfr's Suggested Retail Price [◇]
----------------	-----------------------------------	----------------------	---------------	--------------------------	------------	-------------------------------------------

TUBE-TYPE TIRES USED WITH DUAL REAR WHEELS

Dealer Note: When dual rear tires are specified, R05, Dual Rear Wheels, will be applied to the order. THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY. For complete specifications and ordering information, see "OTHER OPTIONS" Section.

7.50-16 /C (6 PR) Maximum Tire Capacity (Each)— Dual Rear (1815)

Highway Nylon

Rear	5.50	0	180	YPB	6.82	179.80	188.62
Spare	5.50	-18	98	ZPB	3.72	88.40	92.12

On-Off Road Nylon

Rear	5.50	0	215	YPC	8.90	232.80	241.70
Spare	5.50	-20	108	ZPC	4.24	101.85	105.89

7.50-16 /D (8 PR) Maximum Tire Capacity (Each)— Front (2440) Dual Rear (2140)

Highway Nylon

Front	5.50	30	0	XPF	.46	34.00	34.46
Rear	5.50	0	180	YPF	7.90	198.30	206.20
Spare	5.50	-18	98	ZPF	3.99	91.80	95.79

On-Off Road Nylon

Rear	5.50	0	216	YPG	9.86	256.10	265.76
Spare	5.50	-20	109	ZPG	4.43	106.25	110.68

7.50-16 /D (8 PR) Maximum Tire Capacity (Each)— Front (2440) Dual Rear (2140)

Highway Polyester

Front	5.50	26	0	XPE	.70	45.90	46.60
Rear	5.50	0	184	YPE	8.38	222.10	230.48
Spare	5.50	-17	96	ZPE	4.11	97.75	101.86

¹ D&H amounts reflect provision for pass through of tire weight tax imposed on manufacturer or importer of tires.
◇ State and local taxes not included.

MOTOR HOME CHASSIS

FACTORY INSTALLED TIRES (WITH 7500-lb REAR AXLE)

See Tire Compatibility Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.
Prices shown are effective with production of 1975 Vehicles

Tire Size Type	Rim Width Included In Tire Option	Added Weight (F) (R)	Option Number	Factory D&H [§]	List Price	Mfr's Suggested Retail Price◇
----------------	-----------------------------------	----------------------	---------------	--------------------------	------------	-------------------------------

TUBELESS TIRES USED WITH DUAL REAR WHEELS

Dealer Note: When dual rear tires are specified, R05, Dual Rear Wheels, will be applied to the order.
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.
For complete specifications and ordering information, see "OTHER OPTIONS" Section.

8.75-16.5 /C (6 PR) Maximum Tire Capacity (Each)— Dual Rear (1750)

With GT5 Axle Only

Highway Nylon

Rear.....	6.00	0	180	YTC	6.98	213.00	219.98
Spare.....	6.00	-14	78	ZTC	3.76	98.00	101.76

On-Off Road Nylon

Rear.....	6.00	0	179	YTB	7.74	261.00	268.74
Spare.....	6.00	-14	78	ZTB	3.95	110.00	113.95

8.75-16.5 /D (8 PR) Maximum Tire Capacity (Each)— Front (2350) Dual Rear (2070)

With GT5 Axle Only

Highway Nylon

Front.....	6.00	0	0	XTE	.54	38.20	38.74
Rear.....	6.00	0	144	YTE	8.06	232.20	240.26
Spare.....	6.00	-15	83	ZTE	4.03	108.90	110.93

On-Off Road Nylon

Rear.....	6.00	0	180	YTF	9.14	280.80	289.94
Spare.....	6.00	-15	92	ZTF	4.30	119.05	123.35

8.75-16.5 /E (10 PR) Maximum Tire Capacity (Each)— Front (2680) Dual Rear (2360)

With GT5 Axle Only

Highway Nylon

Front.....	6.00	24	0	XTH	.88	65.70	66.58
Rear.....	6.00	0	187	YTH	8.74	285.20	293.94
Spare.....	6.00	-15	83	ZTH	4.20	120.20	124.40

On-Off Road Nylon

Rear.....	6.00	0	186	YTJ	9.66	333.80	343.46
Spare.....	6.00	-16	95	ZTJ	4.43	132.35	136.78

[§] D&H amounts reflect provision for pass through of tire weight tax imposed on manufacturer or importer of tires.
◇ State and local taxes not included.

MOTOR HOME CHASSIS

FACTORY INSTALLED TIRES (WITH 10,000-lb REAR AXLE)

See Tire Compatibility Chart for Available Front/Rear Combinations.
Spare tire available to match either front or rear tires.
Prices shown are effective with production of 1975 Vehicles

Tire Size Type	Rim Width Included in Tire Option	Added Weight (F) (R)	Option Number	Factory D&H [‡]	List Price	Mfr's Suggested Retail Price ◊
----------------	-----------------------------------	----------------------	---------------	--------------------------	------------	--------------------------------

TUBELESS TIRES USED WITH DUAL REAR WHEELS

Dealer Note: When dual rear tires are specified, R05, Dual Rear Wheels, will be applied to the order.
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.
For complete specifications and ordering information, see "OTHER OPTIONS" Section.

8-19.5 /D (8 PR) Truck Type. Maximum Tire Capacity (Each)—Front (2800) Dual Rear (2460)

Highway Nylon

Front						
158.5" wheelbase only	6.75	59 0	XSF	1.58	84.10	65.68
178" wheelbase only (Standard)	6.75	0 0	XSF	N.C.	N.C.	N.C.
Rear						
158.5" wheelbase only	6.75	0 240	YSF	10.14	293.00	303.14
178" wheelbase only (Standard)	6.75	0 0	YSF	N.C.	N.C.	N.C.
Spare	6.75	-21 115	ZSF	4.55	122.00	126.55

On-Off Road Nylon

Rear						
158.5" wheelbase only	6.75	0 288	YSE	12.74	348.20	360.94
178" wheelbase only	6.75	0 48	YSE	2.60	67.20	69.80
Spare	6.75	-23 128	ZSE	5.20	135.80	141.00

8-19.5 /E (10 PR) Truck Type. Maximum Tire Capacity (Each)—Front (3170) Dual Rear (2780)

Highway Nylon

Front						
158.5" wheelbase only	6.75	68 0	XSG	2.58	122.00	124.58
178" wheelbase only	6.75	8 0	XSG	1.00	51.00	52.00
Rear						
158.5" wheelbase only	6.75	0 256	YSG	12.14	401.40	413.54
178" wheelbase only	6.75	0 16	YSG	2.00	102.00	104.00
Spare	6.75	-22 120	ZSG	5.05	147.50	152.55

8-19.5 /D (8 PR) Truck Type. Maximum Tire Capacity (Each)—Front (2800) Dual Rear (2460)

Highway Polyester

Front						
158.5" wheelbase only	6.75	65 0	XSN	1.62	78.00	77.62
178" wheelbase only	6.75	6 0	XSN	.04	11.90	11.94
Rear						
158.5" wheelbase only	6.75	0 252	YSN	10.22	317.70	327.92
178" wheelbase only	6.75	0 12	YSN	.08	23.80	23.88
Spare	6.75	-22 119	ZSN	4.57	127.95	132.52

[‡] D&H amounts reflect provision for pass through of tire weight tax imposed on manufacturer or importer of tires.
◊ State and local taxes not included.

MOTOR HOME CHASSIS

OPTIONS AND ACCESSORIES WHEN INSTALLED BY CHEVROLET

Prices shown are effective with production of 1975 Vehicles

Description	Added Weight (F) (R)	Option Number	Factory D&H [†]	List Price	Mfr's Suggested Retail Price [◇]
SPARE WHEELS					
16 x 5.50. For tube-type tires with dual rear wheels. Not available on 178" wheelbase	-8 43	S76	N.C.	21.00	21.00
16 x 6.50. For tube-type tires with single rear wheels. Not available on 178" wheelbase or when 10,000-lb rear axle is specified . . .	-8 43	QE8	N.C.	21.00	21.00
16.5 x 6.00. For tubeless tires with single rear wheels. Not available on 178" wheelbase or when 10,000-lb rear axle is specified	-6 34	QE6	N.C.	13.00	13.00
16.5 x 6.75. For tubeless tires with single rear wheels. Not available on 178" wheelbase or when 10,000-lb rear axle is specified	-7 40	QE7	N.C.	15.00	15.00
19.5 x 6.75. For tubeless tires. Available on 158.5" wheelbase with 10,000-lb rear axle or 178" wheelbase.....	-10 56	Q35	N.C.	34.00	34.00

[†] D&H amounts reflect provision for pass through of tire weight tax imposed on manufacturer or importer of tires.
[◇] State and local taxes not included.