
ORIGINAL COPY

MANUFACTURERS MOTOR VEHICLE SPECIFICATIONS

METRIC(U.S. Customary)

Passenger Car

1986

Manufacturer Chevrolet Motor Division General Motors Corporation	Car Line Chevrolet
Mailing Address Chevrolet-Pontiac-Canada Group Engineering Center General Motors Corporation 30003 Van Dyke Warren, MI 48090-9060	Issued July, 1985 Revised September, 1985

Questions concerning these specifications should be directed to the manufacturer whose address is shown above.

The information contained herein is prepared, distributed by, and is solely the responsibility of the automobile manufacturing company to whose products it relates. This specification form was developed by the automobile manufacturing companies under the auspices of the Motor Vehicle Manufacturers Association of the United States, Inc.

The General Specifications herein are those in effect at date of compilation and are subject to change without notice by the manufacturer.

Blank Forms Provided by Technical Affairs Division



Motor Vehicle Manufacturers Association
of the United States, Inc.

MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Table of Contents

1	Car Models
2	Power Teams
3-6	Engine
4	Lubrication System
4	Diesel Information
5	Cooling System
6	Fuel System
7	Vehicle Emission Control
7	Exhaust System
8-10	Transmission, Axles and Shafts
11	Suspension-Front and Rear
12-13	Brakes
13	Tires and Wheels
14-15	Steering
15-16	Electrical
17	Body – Miscellaneous Information
18	Restraint System
18	Frame
18	Glass
19	Convenience Equipment
20-22	Car and Body Dimensions
23	Vehicle Fiducial Marks
24	Lamps and Headlamps
25	Vehicle Mass (Weight)
26	Optional Equipment Differential Mass (Weight)
27-33	Car and Body Dimensions Definitions - Key Sheets
34	Index

NOTE:

1. This form uses both SI metric units and U.S. Customary units. The metric unit of measure is presented first, and the U.S. Customary unit follows in parentheses.
2. UNLESS OTHERWISE INDICATED:
 - a. Specifications apply to standard models without optional equipment. Significant deviations are noted.
 - b. Nominal design dimensions are used throughout these specifications.
 - c. All linear dimensions are in millimeters (inches), and all mass (weight) specifications are in kilograms (pounds).
3. The General Specifications herein are those in effect at date of completion and are subject to change without notice by the manufacturer.
4. Additional Car and Body Dimensions (based in part on SAE J1100 "Motor Vehicle Dimensions") may be available from the manufacturer.

**MVMA Specifications Form
Passenger Car**

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Car Models

Model Description & Drive (FWD/RWD)	Introduction Date	Make, Car Line, Series, Body Type (Mfr's Model Code)	No. of Designated Seating Positions (Front/Rear)		Max. Trunk/Cargo Load—Kilograms (Pounds)
Rear Wheel Drive Chevrolet		Model Number	Front/Rear-3rd		
Caprice					
4-Door Sedan		1BL69	3	3	90.7 (200.0)
Caprice Classic					
4-Door Sedan		1BN69	3	3	90.7 (200.0)
2-Door Coupe		1BN47	3	3	90.7 (200.0)
4-Door Station Wagon, 3-Seat		1BN35	3	3-2	0 (0)

NOTE: Any Specifications on the following pages specific to California requirements are indicated accordingly.

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (•) 9-85

METRIC (U.S. Customary)

Power Teams (Indicate whether standard or optional)

SAE J1349 Net bhp (brake horsepower) and net torque corrected to 77°F/25° C and 29.61 in. Hg/100 kPa atmospheric pressure.

SERIES AVAILABILITY	ENGINE					E x h a u s t S/D	TRANSMISSION TRANSAXLE	DRIVE RATIOS (:1)		
	Displ. Liters (in ³)	Carb. (Barrels, FI, etc.)	Compr. Ratio	SAE Net at RPM				AXLE RATIO @		
				kW (bhp)	Torque N·m (lb. ft.)			Overall Base Veh. Drive	Opt. Veh. Drive	Overall Opt. Veh. Drive
Base - All States Sedans & Coupe	V6 4.3Liter (262CID) LB4	EFI *	9.3:1	140 @ 4000	225 @ 2000	S	Auto '200-3c' Base (MV9)	2.56	2.56	3.08\$ 3.08
Optional All States Sedans & Coupe Wagon	V8 5.0Liter (305CID) LG4	4- Bbl	9.5:1	165 @ 4200	245 @ 2400	S	Auto-700-R4 - Base (MD8)	2.56	1.80	3.08\$ 2.16
							Auto-700-R4 - Base (MD8)	2.73	1.90	3.08\$ 2.16
<p>@ - 191mm (7-1/2") ring gear for coupe and sedans with base axles; 216 mm (8-1/2") ring gear for wagons, sed vehicles, limited slip axles and optional axle ratios. * - Electronic Fuel Injection. \$ - Optional Axle Ratio</p>										

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) 9-85

METRIC (U.S. Customary)

Power Teams (Indicate whether standard or optional)


SAE J1349 Net bhp (brake horsepower) and net torque corrected to 77°F/25°C and 29.61 in. Hg/100 kPa atmospheric pressure.

SERIES AVAILABILITY	ENGINE					E x h a u s t S/D	TRANSMISSION TRANSAXLE	DRIVE RATIOS (:1)	
	Displ. Liters (in ³)	Carb. (Barrels, FI, etc.)	Compr. Ratio	SAE Net at RPM				AXLE RATIO @	
				kW (bhp)	Torque N·m (lb. ft.)			Base Veh. Drive	Opt. Veh. Drive
Base - All States Sedans & Coupe	V6 4.3 Liter (262CID) LB4	EFI *	9.3:1	140 @ 4000	225 @ 2000	S	Auto '200-3c' Base (MV9)	2.56	2.56 3.08\$ 3.08
Optional All States Sedans & Coupe Wagon	V8 5.0 Liter (305CID) LG4	4- Bb1	9.5:1	165 @ 4200	245 @ 2400	S	Auto-700-R4 - Base (MD8) Auto-700-R4 - Base (MD8)	2.56	1.80 3.08\$ 2.16 2.73 1.90 3.08\$ 2.16
<p>@ - 191mm (7-1/2") ring gear for coupe and sedans with base axles; 216 mm (8-1/2") ring gear for wagons, seo vehicles, limited slip axles and optional axle ratios. * - Electronic Fuel Injection. \$ - Optional Axle Ratio</p>									
Wagon	V8 5.0L 307CID LV2	4 bb1	8.0:1	140 @ 3200	255 @ 2000				
Wagon	V8 5.0L 307CID LV2 H.O.	4 bb1	8.0:1	170 @ 4000	250 @ 2600				



.

.



MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Engine Description/Carb.
 Engine Code

4.3 Liter V6 (262 CID)
 (Electronic Fuel Injection)
 RPO LB4

ENGINE - GENERAL

Type & description (inline, V, angle, flat, location, front, mid, rear, transverse, longitudinal, sohc, dohc, ohv, hemi, wedge, pre-camber, etc.)	90° "V" - Front - Longitudinal Number of mounting points Two - Front One - Rear	
Manufacturer	Chevrolet	
No. of cylinders	6	
Bore	101.60 (4.00)	
Stroke	88.39 (3.48)	
Bore spacing (C/L to C/L)	111.80 (4.4)	
Cylinder block material & mass kg (lbs.)	Cast alloy iron 46.500 (102.5)	
Cylinder block deck height	Not Available	
Deck clearance (minimum) (above or below block)	Not Available	
Cylinder head material & mass kg (lbs.)	Cast alloy iron 16.330 (36.0)	
Cylinder head volume (cm ³)	Not Available	
Head gasket thickness (compressed)	.0210	
Minimum combustion chamber total volume (cm ³)	Not Available	
Cyl. no. system (front to rear)*	L. Bank	1-3-5
	R. Bank	2-4-6
Firing order	1-6-5-4-3-2	
Intake manifold material & mass (kg (weight, lbs.))	Cast aluminum/5.000 (11.0)	
Exhaust manifold material & mass (kg (weight, lbs.))	Stainless steel/3.146 (6.9) R.H., 2.141 (4.7) L.H.	
Recommended fuel (leaded, unleaded, diesel)	Unleaded	
Fuel antiknock index (R + M)	87	
2	87	
Total dressed engine mass (wt) dry**	210.7 (464.5)	

Engine - Pistons

Material & mass, g (weight, oz.) - piston only	Cast aluminum alloy .598 (21.1)
--	------------------------------------

Engine - Camshaft

Location	In block above crankshaft	
Material & mass kg (weight, lbs.)	Cast alloy iron/3.171 (7.0)	
Drive type	Chain / belt	Chain
	Width / pitch	Not Available

* Rear of engine - drive takeoff. View from drive takeoff end to determine left & right side of engine.

** Dressed engine mass (weight) includes the following:

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) 9-85

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

5.0 Liter V8 (305 CID)
 4-Bbl. Carburetor
 RPO LG4

ENGINE - GENERAL

Type & description (inline, V, angle, flat, location, front, mid, rear, transverse, longitudinal, sohc, dohc, ohv, hemi, wedge, pre-camber, etc.)	90° "V" - Front - Longitudinal
	Number of mounting points
	Two - Front
	One - Rear
Manufacturer	Chevrolet
No. of cylinders	8
Bore	94.89 (3.74)
Stroke	88.39 (3.48)
Bore spacing (C/L to C/L)	111.8 (4.40)
Cylinder block material & mass kg (lbs.)	Cast alloy iron 68.674 (151.4)
Cylinder block deck height	229.4 (9.025)
Deck clearance (minimum) (above or below block)	.635 (.025) below
Cylinder head material & mass kg (lbs.)	Cast alloy iron 17.917 (39.5)
Cylinder head volume (cm ³)	Not Applicable
Head gasket thickness (compressed)	.533 (.021)
Minimum combustion chamber total volume (cm ³)	Not Available
Cyl. no. system (front to rear)*	L. Bank
	R. Bank
	1-3-5-7
	2-4-6-8
Firing order	1-8-4-3-6-5-7-2
Intake manifold material & mass [kg (weight, lbs.)]	Cast aluminum 6.900 (15.2)
Exhaust manifold material & mass [kg (weight, lbs.)]	Cast iron 4.140 (9.1) L.H., 3.800 (8.4) R.H.
Recommended fuel (leaded, unleaded, diesel)	Unleaded
Fuel antiknock index (R + M)	
2	87
Total dressed engine mass (wt) dry**	249.3 (549.6)

Engine - Pistons

Material & mass, g (weight, oz.) - piston only	Cast aluminum alloy .502 (17.7)
--	------------------------------------

Engine - Camshaft

Location	In block above crankshaft
Material & mass kg (weight, lbs.)	Cast alloy iron 3.969 (8.75)
Drive type	Chain / belt
	Width / pitch
	Chain 15.87 (.625)/12.7 (.500)

* Rear of engine - drive takeoff. View from drive takeoff end to determine left & right side of engine.
 ** Dressed engine mass (weight) includes the following:

All those items necessary to make the engine a complete ready-to-run unit.

Aluminum Intake

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (*) _____

METRIC (U.S. Customary)

Engine Description/Carb.
 Engine Code

4.3 Liter V6 (262 CID)
 (Electronic Fuel Injection)
 RPO LB4

Engine - Valve System

Hydraulic lifters (std., opt., NA)	Standard
Valves	Number intake / exhaust
	Head O.D. intake / exhaust

6/6
 49.28 (1.94)/38.10 (1.50)

Engine - Connecting Rods

Material & mass [kg., (weight, lbs.)]	1141 Steel/forging/.388 (0.85)
---------------------------------------	--------------------------------

Engine - Crankshaft

Material & mass [kg., (weight, lbs.)]	Nodular cast iron/17.500 (38.6)
End thrust taken by bearing (no.)	4
Number of main bearings	4
Seal (material, one, two piece design, etc.)	Front
	Rear

Engine - Lubrication System

Normal oil pressure (kPa (psi) at engine rpm)	345-488 (50-65 @ 2000)
Type oil intake (floating, stationary)	Stationary
Oil filter system (full flow, part, other)	Full flow
Capacity of c/case, less filter-refill-L (qt.)	3.8 (4.0)

Engine - Diesel Information

Diesel engine manufacturer	
Glow plug, current drain at 0°F	Not
Injector nozzle	Type
	Opening pressure [kPa (psi)]
Pre-chamber design	
Fuel injection pump	Manufacturer
	Type
Fuel injection pump drive (belt, chain, gear)	
Supplementary vacuum source (type)	
Fuel heater (yes/no)	
Water separator, description (std., opt.)	
Turbo manufacturer	
Oil cooler-type (oil to engine coolant; oil to ambient air)	
Oil filter	

Engine - Intake System

Turbo charger - manufacturer	Not
Super charger - manufacturer	Applicable
Charge cooler	--

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (•) _____

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

5.0 Liter V8 (305 CID)
 4-Bbl. Carburetor
 RPO LG4

Engine - Valve System

Hydraulic lifters (std., opt., NA)	Standard
Valves	Number intake / exhaust
	Head O.D. intake / exhaust

8/8
46.74(1.84)/38.10(1.50)

Engine - Connecting Rods

Material & mass [kg., (weight, lbs.)]	1037 or 1038 steel/.388 (.855)
---------------------------------------	--------------------------------

Engine - Crankshaft

Material & mass [kg., (weight, lbs.)]	Nodular Cast Iron/23.360(51.50)
End thrust taken by bearing (no.)	5
Number of main bearings	5
Seal (material, one, two piece design, etc.)	Front
	Rear

Engine - Lubrication System

Normal oil pressure (kPa (psi) at engine rpm)	345-488 (50-65) @ 2000
Type oil intake (floating, stationary)	Stationary
Oil filter system (full flow, part, other)	Full flow
Capacity of c/case, less filter-refill-L (qt.)	4.5 (5.0)

Engine - Diesel Information

Diesel engine manufacturer	
Glow plug, current drain at 0°F	
Injector nozzle	Type
	Opening pressure (kPa (psi))
Pre-chamber design	
Fuel injection pump	Manufacturer
	Type
Fuel injection pump drive (belt, chain, gear)	
Supplementary vacuum source (type)	
Fuel heater (yes/no)	
Water separator, description (std., opt.)	
Turbo manufacturer	
Oil cooler-type (oil to engine coolant; oil to ambient air)	
Oil filter	

Engine - Intake System

Turbo charger - manufacturer	Not
Super charger - manufacturer	Applicable
Charge cooler	

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

4.3 Liter V6 (262 CID)
(Electronic Fuel Injection)
RPO LB4

Engine - Cooling System

Coolant recovery system (std., opt., n.a.)		Standard		
Coolant fill location (rad., bottle)		Bottle		
Radiator cap relief valve pressure [kPa (psi)]		103.4 (15.0)		
Circulation thermostat	Type (choke, bypass)	Choke		
	Starts to open at °C (°F)	91 (195)		
Water pump	Type (centrifugal, other)	Centrifugal		
	GPM 1000 pump rpm	--		
	Number of pumps	One		
	Drive (V-belt, other)	V-belt		
	Bearing type	Sealed double row ball		
	Impeller material			
Housing material				
By-pass recirculation [type (inter., ext.)]		Internal		
Cooling system capacity	With heater—L(qt.)	11.51 (12.2)		
	With air cond.—L(qt.)	11.43 (12.1)		
	Opt. equipment [specify—L(qt.)]	11.89 (12.6)		
Water jackets full length of cyl. (yes, no)		Yes		
Water all around cylinder (yes, no)		Yes		
Water jackets open at head face (yes, no)				
Radiator core	Std., A/C, HD	Std.	A/C	H.D.
	Type (cross-flow, etc.)	Cross flow		
	Construction (fin & tube mechanical, braze, etc.)			
	Material, mass [kg (wgt. lbs.)]	copper-brass, high efficiency radiator		
	Width	528.3	528.3	528.3
	Height	429.7	429.7	429.7
	Thickness	25.0	25.0	40.2
	Fins per inch *	3.5	3.0	3.0
Radiator end tank material				
Std., elec., opt.		Std.	A/C	
Fan	Number of blades & type (flex, solid, material)	4, Steel, Solid		5, Aluminum, Solid
	Diameter & projected width	482.6		508.0
	Ratio (fan to crankshaft rev.)	--		--
	Fan cutout type	--		Clutch
	Drive type (direct, remote)	V-Belt		V-Belt
	RPM at idle (elec.)	--		--
	Motor rating (wattage) (elec.)	--		--
	Motor switch (type & location) (elec.)	--		--
	Switch point (temp., pressure) (elec.)	--		--
	Fan shroud (material)	Plastic		Plastic

* - Distance between top of fins

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

5.0 Liter V8 (305 CID)
4-Bbl. Carburetor
RPO LG4

Engine - Cooling System

Coolant recovery system (std., opt., n.a.)		Standard		
Coolant fill location (rad., bottle)		Bottle		
Radiator cap relief valve pressure [kPa (psi)]		103.4 (15.0)		
Circulation thermostat	Type (choke, bypass)	Choke		
	Starts to open at °C (°F)	91 (195)		
Water pump	Type (centrifugal, other)	Centrifugal		
	GPM 1000 pump rpm	14		
	Number of pumps	One		
	Drive (V-belt, other)	V-belt		
	Bearing type	Sealed double row ball		
	Housing material			
By-pass recirculation [type (inter., ext.)]		Internal		
Cooling system capacity	With heater-L (qt.)	15.04 (15.89)		
	With air cond.-L (qt.)	14.97 (15.82)		
	Opt. equipment [specify-L (qt.)]	15.69 (16.58)		
Water jackets full length of cyl. (yes, no)		Yes		
Water all around cylinder (yes, no)		Yes		
Water jackets open at head face (yes, no)				
Radiator core	Std., A/C, HD	Std.	A/C	H.D.
	Type (cross-flow, etc.)	Cross flow		
	Construction (fin & tube mechanical, braze, etc.)			
	Material, mass [kg (wgt, lbs.)]	copper-brass, high efficiency radiator		
	Width	668.0	668.0	668.0
	Height	429.7	429.7	429.7
	Thickness	25.0	25.0	40.2
	Fins per inch *	30	40	4.0
Radiator end tank material				
Fan	Std., elec., opt.	Std.		A/C
	Number of blades & type (flex, solid, material)	4, Steel, Solid		5, Alum., Solid
	Diameter & projected width	482.6		508.0
	Ratio (fan to crankshaft rev.)	1.096:1		1.25:1
	Fan cutout type	--		Clutch
	Drive type (direct, remote)	V-Belt		V-Belt
	RPM at idle (elec.)	--		--
	Motor rating (wattage) (elec.)	--		--
	Motor switch (type & location) (elec.)	--		--
	Switch point (temp., pressure) (elec.)	--		--
Fan shroud (material)	Plastic		Plastic	

* - Distance between top of fins

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (•) _____

METRIC (U.S. Customary)

Engine Description/Carb.
 Engine Code

4.3 Liter V6 (262 CID)
 Electronic Fuel Injection
 RPO LB4

Engine – Fuel System (See supplemental page for details of Fuel Injection, Supercharger, Turbocharger, etc. if used)

Induction type: carburetor, fuel injection system, etc.		Fuel Injection	
Carburetor	Mfgr.	--	
	Choke (type)	None	
	Idle spd.-rpm (spec. neutral or drive and propane if used)	Manual	"
		Automatic	"
Idle A/F mix.		Preset - no adjustment provided	
Fuel injection	Point of injection (no.)	Throttle body	
	Constant, pulse, flow	Pulse	
	Control (electronic, mech.)	Electronic	
	System pressure [kPa (psi)]	--	
Intake manifold heat control (exhaust or water thermostatic or fixed)		Exhaust	
Air cleaner type	Standard	Replaceable paper element, single snorkel	
	Optional	Not Available	
Fuel pump	Type (elec. or mech.)	Electrical	
	Location (eng., tank)	Fuel Tank	
	Pressure range [kPa (psi)]	--	

Fuel Tank

Capacity [refill L (gallons)]		93 (24.5)*cpe & sed; 83.3 (22.0) - s.w. (approximately)
Location (describe)		Underbody behind rear axle
Attachment		Two straps to underbody
Material & Mass [kg (weight lbs)]		Steel
Filler pipe	Location & material	Center, Coupe and sedan; L.R. quarter panel - station wagon
	Connection to tank	Solder
Fuel line (material)		Steel
Fuel hose (material)		Elastomer hose
Return line (material)		Not Available
Vapor line (material)		Steel
Extended range tank	Opt., n.a.	Not Available
	Capacity [L (gallons)]	"
	Location & material	"
	Attachment	"
Auxiliary tank	Opt., n.a.	"
	Capacity [L (gallons)]	"
	Location & material	"
	Attachment	"
	Selector switch or valve	"
Separate fill		"

* 95 (25.0) with 5.0 Liter 4-Bbl. V8 Engine

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

5.0 Liter V8 (305 CID)
4-Bbl. Carburetor
RPO LG4

Engine - Fuel System (See supplemental page for details of Fuel Injection, Supercharger, Turbocharger, etc. if used)

Induction type: carburetor, fuel injection system, etc.		Carburetor	
Carburetor	Mfr.	Rochester	
	Choke (type)	Electric	
	Idle spd.-rpm (spec. neutral or drive and propane if used)	Manual	Not Available
		Automatic	500 RPM (Drive)
Idle A/F mix.		Preset - no adjustment provided	
Fuel injection	Point of injection (no.)	--	
	Constant, pulse, flow	--	
	Control (electronic, mech.)	--	
	System pressure [kPa (psi)]	--	
Intake manifold heat control (exhaust or water thermostatic or fixed)		Exhaust	
Air cleaner type	Standard	Replaceable paper element, single snorkel	
	Optional	None	
Fuel pump	Type (elec. or mech.)	Mechanical	
	Location (eng., tank)	Lower - right front	
	Pressure range [kPa (psi)]	38.0-48.5 (5.5-7.0)	

Fuel Tank

Capacity [refill L (gallons)]		95 (25.0) cpe & sed; 83.3 (22.0) - s.w. (approximately)
Location (describe)		Underbody behind rear axle
Attachment		Two straps to underbody
Material & Mass [kg (weight lbs)]		Steel
Filler pipe	Location & material	Rear - coupe and sedan; L.R. quarter panel - station wagon
	Connection to tank	Solder
Fuel line (material)		Steel
Fuel hose (material)		Rubber
Return line (material)		Steel
Vapor line (material)		Steel
Extended range tank	Opt., n.a.	Not Available
	Capacity [L (gallons)]	"
	Location & material	"
	Attachment	"
Auxiliary tank	Opt., n.a.	"
	Capacity [L (gallons)]	"
	Location & material	"
	Attachment	"
	Selector switch or valve	"
Separate fill		"

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (e)

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

4.3 Liter V6 (262 CID)
Electronic Fuel Injection
RPO LB4

Vehicle Emission Control

Exhaust Emission Control	Type (air injection, engine modifications, other)		Air injection w/computer command control
	Air Injection	Pump or pulse	Pump
		Driven by	V-Belt
		Air distribution (head, manifold, etc.)	Exhaust manifold and catalytic converter
		Point of entry	Exhaust manifold
	Exhaust Gas Recirculation	Type (controlled flow, open orifice, other)	--
		Exhaust source	--
		Point of exhaust injection (spacer, carburetor, manifold, other)	Inlet Manifold
	Catalytic Converter	Type	Dual bed ox & red
		Number of	One
Location(s)		Beneath RF underbody	
Volume [L (in ³)]		2.78 (170)	
Substrate type		Monolith	
Crankcase Emission Control	Type (ventilates to atmosphere, induction system, other)		Induction system
	Energy source (manifold vacuum, carburetor, other)		Manifold vacuum
	Discharges (to intake manifold, other)		Intake manifold
	Air inlet (breather cap, other)		Carburetor air cleaner
Evaporative Emission Control	Vapor vented to (crankcase, canister, other)	Fuel tank	Canister
		Carburetor	--
	Vapor storage provision		Canister
Electronic system	Closed loop (yes/no)		Yes
	Open loop (yes/no)		No

Engine - Exhaust System

Type (single, single with cross-over, dual, other)		Single
Muffler no. & type (reverse flow, straight thru, separate resonator) Material & Mass [kg (weight lbs)]		One, Reverse flow
Resonator no. & type		None
Exhaust pipe	Branch o.d., wall thickness	50.8 x 1.14 (2.0 x 0.04)
	Main o.d., wall thickness	57.15 x 1.40 (2.25 x 0.05)
	Material & Mass [kg (weight lbs)]	Stainless steel
Intermediate pipe	o.d. & wall thickness	57.15 x 1.40 (2.25 x 0.05)
	Material & Mass [kg (weight lbs)]	Steel tubing
Tail pipe	o.d. & wall thickness	50.8 x 1.10 (2.0 x 0.04)
	Material & Mass [kg (weight lbs)]	Aluminum coated steel

MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (•) _____

Engine Description/Carb.
Engine Code

5.0 Liter V8 (305 CID)
4-8b1. Carburetor
RPO LG4

Vehicle Emission Control

Exhaust Emission Control	Type (air injection, engine modifications, other)		Air injection w/ Computer Command Control	
	Air Injection	Pump or pulse	Pump vane	
		Driven by	V-Belt	
		Air distribution (head, manifold, etc.)	Exh.manifold & cat.conv.	
		Point of entry	Exh. manifold takedown	
	Exhaust Gas Recirculation	Type (controlled flow, open orifice, other)	Pulse width, modulated	
		Exhaust source	Manifold exhaust crossover	
		Point of exhaust injection (spacer, carburetor, manifold, other)	Inlet manifold	
	Catalytic Converter	Type	Dual bed (a)	
		Number of	One	
		Location(s)	Beneath RF uderbody	
		Volume [L (in ³)]	2.78 (169.8)	
		Substrate type	Monolith	
	Crankcase Emission Control	Type (ventilates to atmosphere, induction system, other)		Induction system
		Energy source (manifold vacuum, carburetor, other)		Manifold vacuum
Discharges (to intake manifold, other)		Inlet manifold		
Air inlet (breather cap, other)		Carburetor air cleaner		
Evaporative Emission Control	Vapor vented to (crankcase, canister, other)	Fuel tank	Canister	
		Carburetor	Canister	
	Vapor storage provision		Canister	
Electronic system	Closed loop (yes/no)		Yes	
	Open loop (yes/no)		No	

Engine - Exhaust System

Type (single, single with cross-over, dual, other)		Single w/crossover
Muffler no. & type (reverse flow, straight thru, separate resonator) Material & Mass [kg (weight lbs)]		One, Reverse flow
Resonator no. & type		None
Exhaust pipe	Branch o.d., wall thickness	50.8x.86 (2.0x.034) (b)
	Main o.d., wall thickness	57.15x1.8 (2.25x.071) (c)
	Material & Mass [kg (weight lbs)]	(b) & (c)
Inter-mediate pipe	o.d. & wall thickness	63.5 x 1.4 (2.50 x .055)
	Material & Mass [kg (weight lbs)]	Steel tubing
Tail pipe	o.d. & wall thickness	63.5 x 1.4 (2.50 x .055)
	Material & Mass [kg (weight lbs)]	Alum. coated steel tubing

- (a) - Oxidizing and reducing.
(b) - Laminated tubing - steel inner, stainless steel outer.
(c) - Stainless steel tubing

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

4.3L V6 262 CID RPO LB4	5.0L V8 305 CID RPO LG4
-------------------------------	-------------------------------

Transmissions/Transaxle

Manual 3-speed (std., opt., n.a.) (mfr.)	Not available
Manual 4-speed (std., opt., n.a.) (mfr.)	Not available
Manual 5-speed (std., opt., n.a.) (mfr.)	Not available
Manual overdrive (std., opt., n.a.) (mfr.)	Not available
Automatic (std., opt., n.a.) (mfr.)	Standard
Automatic overdrive (std., opt., n.a.) (mfr.)	Standard

Manual Transmission/Transaxle

Number of forward speeds			
Transmission ratios	In first		
	In second	Not Available	
	In third	Available	
	In fourth		
	In fifth		
	In overdrive		
	In reverse		
Synchronous meshing (specify gears)			
Shift lever location			
Lubricant	Capacity [L (pt.)]		
	Type recommended		
	SAE viscosity number	Summer	
		Winter	
Extreme cold			

Clutch (Manual Transmission)

Make, type, engagement (describe) - (hydraulic, cable, rod)		
Assist (yes, no / percent)		
Type pressure plate springs		Not Available
Total spring load [N (lb.)]		Available
No. of clutch driven discs		
Clutch facing	Material	
	Manufacturer	
	Part number	
	Rivets/plate	
	Rivet size	
	Outside & inside dia.	
	Total eff. area [cm ² (in. ²)]	
	Thickness	
Engagement cushion method		
Release bearing	Type & method of lubrication	
Torsional damping	Method: springs, friction material	

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

4.3 Liter V6 (262 CID)
Electronic Fuel Injection
RPO LB4

Automatic Transmission/Transaxle

Trade name		3-Speed Automatic
Type and special features (describe)		Torque converter with planetary gears '200c'
Selector	Location	Steering column
	Ltr./No. designation	P-R-N-D-2-1
Gear ratios	R	2.07
	D	1.00*
	L ₃	1.57
	L ₂	2.74
	L ₁	Not Available
Max. upshift speed - drive range [km/h (mph)]		1-2=69(43), 2-3=113(70)
Max. kickdown speed - drive range [km/h (mph)]		3-2=107(66.5), 2-1=60 (37)
Min. overdrive speed [km/h (mph)]		Not Applicable
Torque converter	Number of elements	3
	Max. ratio at stall	1.91:1
	Type of cooling (air, liquid)	Liquid
	Nominal diameter	298 (11.75)
Lubricant	Capacity [refill L. (pt.)]	3.0 (6.0)
	Type Recommended	Dexron II
Oil cooler (std., opt., NA, internal, external, air, liquid)		Standard, integral with radiator *Converter Clutch engagement

Axle or Front Wheel Drive Unit

Type (front, rear)		Rear	
Description		Semi-floating axle, overhung hypoid drive pinion and ring gear	
Limited slip differential (type)		Disc clutch	
Drive pinion offset		7.5" R.G.-38.1 (1.50); 8.50" R.G.-44 (1.75)	
Drive pinion (type)		Hypoid gear	
No. of differential pinions		Two	
Pinion / differential adjustment (shim, other)		Shim	
Pinion / differential bearing adjustment (shim, other)		Collapsible Sleeve	
Driving wheel bearing (type)		Direct or Single Row Cylindrical	
Lubricant	Capacity [L. (pt.)]	7.5" R.G.-1.6 (3.5); 8.50" R.G. 2.0 (4.3)	
	Type recommended	GL-5 Gear Lubricant	
	SAE vis- cosity number	Summer	80W or 80W-90
		Winter	80W or 80W-90
		Extreme cold	80W or 80W-90

Axle or Transaxle Ratio and Tooth Combinations (See 'Power Teams' for axle ratio usage.)

Axle ratio (or overall top gear ratio)		2.56	3.08
No. of teeth	Pinion	16	13
	Ring gear or gear	41	40
Ring gear o.d.		191 (7.50)	216 (8.50)
Transaxle	Transfer gear ratio	--	--
	Final drive ratio	--	--

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (●) _____

METRIC (U.S. Customary)

Engine Description/Carb.
 Engine Code

5.0 Liter V8 (305 CID)
 4-Bbl. Carburetor
 RPO LG4

Automatic Transmission/Transaxle (See Power Teams for transmission usage)

Trade name		4-Speed Automatic	
Type and special features (describe)		Torque converter with planetary gears '700-R4 '200-4R'	
Selector	Location	Steering column	
	Ltr./No. designation	P-R-N- D -D-2-1	
Gear ratios	R	2.29	2.07
	D	1.00*	1.00*
	L ₂	1.63*	1.57
	L ₂ 1	3.06	2.74
	L Overdrive	0.70*	0.67
Max. upshift speed - drive range [km/h (mph)]		1-2=60(37.5), 2-3=(108(67)	Not Avail.
Max. kickdown speed - drive range [km/h (mph)]		3-2=100(62), 2-1=45(28)	"
Min. overdrive speed [km/h (mph)]		67 (41.5)	"
Torque converter	Number of elements	3	
	Max. ratio at stall	5.8:1	Not Available
	Type of cooling (air, liquid)	Liquid	
	Nominal diameter	298 (11.75)	
Lubricant	Capacity [refill L (pt.)]	3.0 (6.0)	
	Type Recommended	Dexron II	
Oil cooler (std., opt., NA, internal, external, air, liquid)		Standard, integral with radiator	

Axle or Front Wheel Drive Unit

Type (front, rear)		Rear		
Description		Semi-floating axle, overhung hypoid drive pinion and ring gear		
Limited slip differential (type)		Disc clutch		
Drive pinion offset		7.5" R.G.-38.1 (1.50); 8.50" R.G.-44 (1.75)		
Drive pinion (type)		Hypoid gear		
No. of differential pinions		Two		
Pinion / differential adjustment (shim, other)		Shim		
Pinion / differential bearing adjustment (shim, other)		Collapsible Sleeve		
Driving wheel bearing (type)		Direct or Single Row Cylindrical		
Lubricant	Capacity [L (pt.)]	7.5" R.G.-1.6 (3.5); 8.50" R.G. 2.0 (5.4)		
	Type recommended	GL-5 Gear Lubricant		
	SAE viscosity number	Summer	80W or 80W-90	
		Winter	80W or 80W-90	
	Extreme cold	80W or 80W-90		

Axle or Transaxle Ratio and Tooth Combinations (See 'Power Teams' for axle ratio usage.)

Axle ratio (or overall top gear ratio)		2.73	3.08	2.56
No. of teeth	Pinion	15	13	16
	Ring gear or gear	41	40	41
Ring gear o.d.		191(7.50)(b)	216(8.50)	191(7.50)
Transaxle	Transfer gear ratio			
	Final drive ratio			

* - Converter clutch engagement
 (b) - Limited slip wagon - 216 (8.50)

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (#) _____

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

4.3 Liter V6 (262 CID)
Electronic Fuel Injection
RPO LB4

Propeller Shaft – Rear Wheel Drive

Type (straight tube, tube-in-tube, internal-external damper, etc.)		Straight tube	
Outer diam. x length* x wall thickness	Manual 3-speed trans.	Not Available	
	Manual 4-speed trans.	"	
	Manual 5-speed trans.	"	
	Overdrive	"	
	Automatic transmission	(3), (4)	
Inter-mediate bearing	Type (plain, anti-friction)	None	
	Lubrication (fitting, prepack)	--	
Slip yoke	Type	Splined	
	Number of teeth	27	
	Spline o.d.	29.858-29.883 (1.1755-1.1765)	
Universal joints	Make and mfg. no.	Front	Saginaw 44
		Rear	Saginaw 44
	Number used	Two	
	Type (ball and trunnion, cross)	Cross	
	Rear attach (u-bolt, clamp, etc.)	Strap & bolt	
	Bearing	Type (plain, anti-friction)	Anti-friction
Lubrication (fitting, prepack)		Prepacked	
Drive taken through (torque tube, arms or springs)		Control arm	
Torque taken through (torque tube, arms or springs)		Torque tube	

- * Centerline to centerline of universal joints, or to centerline of rear attachment
- (3) 76.2x1384.0x1.65mm (3.0x54.49x.065 in) 3.08 axle with and w/o limited slip differential.
 (4) 69.9x1484.9x1.65-Sedans & Coupes without limited slip differential.
 76.2x1464.3x1.65-Sedans & Coupes with limited slip differential.

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e)

METRIC (U.S. Customary)

Engine Description/Carb.
 Engine Code

5.0 Liter V8 (305 CID)
 4-Bbl. Carburetor
 RPO LG4

Propeller Shaft – Rear Wheel Drive

Type (straight tube, tube-in-tube, internal-external damper, etc.)		Straight tube	
Outer diam. x length* x wall thickness	Manual 3-speed trans.	Not Available	
	Manual 4-speed trans.	"	
	Manual 5-speed trans.	"	
	Overdrive	"	
	Automatic transmission	(3)	(4)
Inter-mediate bearing	Type (plain, anti-friction)	None	
	Lubrication (fitting, prepack)	--	
Slip yoke	Type	Splined	
	Number of teeth	27	
	Spline o.d.	29.858-29.883 (1.1755-1.1765)	
Universal joints	Make and mfg. no.	Front	Saginaw 44
		Rear	Saginaw 44
	Number used	Two	
	Type (ball and trunion, cross)	Cross	
	Rear attach (u-bolt, clamp, etc.)	Strap & Bolt	
	Bearing	Type (plain, anti-friction)	Anti-Friction
Lubrication (fitting, prepack)		Prepacked	
Drive taken through (torque tube, arms or springs)		Control Arm	
Torque taken through (torque tube, arms or springs)		Control Arm	

(3) 76.2x1410.7x1.65mm (3.0x55.45x.065 in) 2.73 axle without Limited Slip Differential.
 76.2x1384.0x1.65mm (3.0x54.49x.065 in) 2.73 axle with Limited Slip Differential.
 * Centerline to centerline of universal joints, or to centerline of rear attachment.
 3.08 axle with and w/o Limited Slip Differential.
 All Station Wagons.

(4) 69.9x1484.9x1.65 - Sedan & Coupe without Limited Slip.
 76.2x1464.3x1.65 - Sedan & Coupe with Limited Slip.
 - All Station Wagons.

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (•) _____

METRIC (U.S. Customary)

Body Type And/Or
Engine Displacement

Sedans & Coupe

Station Wagon

Suspension - General

Car leveling	Std./opt./n.a.	Not Available	Optional (rear only)
	Type (air, hyd., etc.)	Not Available	Air
	Manual/auto. controlled	Not Available	Manual
Provision for brake dip control		Front suspension geometry	
Provision for accel. squat control		Rear suspension geometry	
Provisions for car jacking		Side lift frame jack body bolt access holes on each side of frame about 2 feet from each wheel centerline	
Shock absorber (front & rear)	Type	Direct, double acting, hydraulic	
	Make	Delco	
	Piston diameter	25 (1.0)	
	Rod diameter	13.49 (0.53)	

Suspension - Front

Type and description		Independent - SLA	
Drive and torque taken through		--	
Travel	Full jounce	90.3mm (3.56 in)	
	Full rebound	197.7mm (4.24 in)	
Spring	Type (coil, leaf, other) & material	Coil-Steel Alloy	
	Insulators (type & material)	Ring Type Natural Rubber	
	Size (coil design height & i.d., bar length x dia.)	241.3x102.9x3347.15.8 (9.5x4.05x131.7x0.622)	241.3x114.3x2743.2x26.8 (9.5x4.50x108.0x0.660)
	Spring rate [N/mm (lb./in.)]	V6-47.0 (268.0), V8-52.5 (300.0)	64.0 (366.0)
	Rate at wheel [N/mm (lb./in.)]	V6-13.8 (79.0), V8-15.5 (88.0)	18.7 (107.0)
Stabilizer	Type (link, linkless, frameless)	Link	
	Material & bar diameter	Tubular Steel-28(1.1);29(1.14)(a)	Steel-28 (1.1)

Suspension - Rear

Type and description		Salisbury 4-link		
Drive and torque taken through		Links		
Travel	Full jounce	123.0mm (4.8 in)	105.0mm (4.1 in)	
	Full rebound	114.0mm (4.5 in)	108.0mm (4.2 in)	
Spring	Type (coil, leaf, other) & material	Coil-Steel Alloy		
	Size (length x width, coil design height & i.d., bar length & dia.)	254x139.7x2961.3x13.44 (10.0x5.5x116.6x0.529)	254x139.7.2585.7x15.5 (10.0x5.5x101.8x0.069)	
	Spring rate [N/mm (lb./in.)]	17.5(100.0), w/F40&41-27.1(155.0)	36.8(210.0)	
	Rate at wheel [N/mm (lb./in.)]	19.4(110.0), w/F40&41-27.2(155.0)	35.3(202.0)	
	Insulators (type & material)		Ring Type Butyl Rubber	
	If leaf	No. of leaves	--	
Shackle (comp. or tens.)		--		
Stabilizer	Type (link, linkless, frameless)	Linkless (a)	None	
	Material & bar diameter	Steel - 25 (1.0)	--	
Track bar (type)		None		

(a) Used with RPO F41 sport suspension

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (•) _____

METRIC (U.S. Customary)

Body Type And/Or
Engine Displacement

Sedans & Coupe	Station Wagon
----------------	---------------

Brakes - Service

Description			Single caliper disc front, duo-servo drum rear.	
Brake type (std., opt., n.a.)	Front (disc or drum)		Disc	
	Rear (disc or drum)		Drum	
Self-adjusting (std., opt., n.a.)			Standard	
Special valving	Type (proportion, delay, metering, other)		Metering and Proportioning	
Power brake (std., opt., n.a.)			Standard	
Booster type (remote, integral, vac., hyd., etc.)			Integral low - vacuum warning switch	Electric (a)
Vacuum source (inline, pump, etc.)			Inline (Intake Manifold)	--
Vacuum reservoir (volume in. ³)			--	--
Vacuum pump-type (elec. gear driven, belt driven, if other so state)			--	--
Anti-skid device type (std., opt., n.a.) (F/R)			Not Available	
Effective area [cm ² (in. ²)]*			648 (100.5)	717 (111.1)
Gross lining area [cm ² (in. ²)]**(F/R)			717 (111.1)	792 (122.9)
Swept area [cm ² (in. ²)]*** (F/R)			2127 (329.8)	2420 (375.1)
Rotor	Outerworking diameter	F/R	279.1 (11.0)/--	301.2 (11.86)/00
	Inner working diameter	F/R	177.8 (7.0)/--	197.4 (7.77)/--
	Thickness	F/R	26.2 (1.03)/--	
	Material & type (vented/solid)	F/R	Cast Iron, Vented/--	
Drum	Diameter & width	F/R	--/241.3 (9.5)/V8-279 (11.0)	--/279.4 (11.0)
	Type and material	F/R	--/Cast Iron Finned	
Wheel cylinder bore			74.7 (2.94)/22.22 (.875)	74.7 (2.94)/25.0 (.98)
Master cylinder	Bore/stroke	F/R	28.6 (1.13)/39.6 (1.56)(b)	31.75 (1.25)
Pedal arc ratio			3.5:1	4.23:1
Line pressure at 445 N(100 lb.) pedal load [kPa (psi)]			--	
Lining clearance			F/R Self-adjusting/Self-adjusting	
Brake lining	Front wheel	Bonded or riveted (rivets/seg.)	Riveted; 8	
		Rivet size	5.33 x 9.12 (.210 x .359)	
		Manufacturer	Delco Moraine	
		Lining code*****		
		Material	Molded asbestos	
		**** Primary or out-board	137 x 48.8 x 11.81 (5.40 x 1.92 x 0.465)	
	Size Secondary or in-board	137 x 48.8 x 11.81 (5.40 x 1.92 x 0.465)		
	Shoe thickness (no lining)	Inboard 15.75 (.620); Outboard 14.0 (.550)		
	Rear wheel	Bonded or riveted (rivets/seg.)	Riveted; 10-primary, 12-secondary	
		Manufacturer	Inlite	
		Lining Code*****		
		Material	Molded asbestos	
**** Primary or out-board		192.5x50.8x4.98 (7.58x2.0x.196)	225x50.8x5.6 (8.86x2.0x0.22)	
Size Secondary or in-board		249.7x50.8x6.73 (9.83x2.0x.265)	291.0x50.8x6.6(11.5x2.0x0.26)	
Shoe thickness (no lining)	Prim-7.6(.301); Sec-9.4(.370) Prim 8.3(.330); Sec-9.1(.370)			

*Excludes rivet holes, grooves, chamfers, etc.

**Includes rivet holes, grooves, chamfers, etc.

***Total swept area for four brakes. (Drum brake: Widest lining contact width for each brake x its contact circumference.)

(Disc brake: Square of Outer Working Dia. minus Square of inner Working Dia. multiplied by Pi/2 for each brake.)

****Size for drum brakes includes length x width x thickness.

*****Manufacturer I.D. catalog or formulation designation and coefficient of friction classification.

a) Electro-hydraulic booster on wagons. (b) V8 engine 23.8 (.934)

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (●) _____

METRIC (U.S. Customary)

Body Type And/Or
Engine Displacement

Sedans & Coupe	Station Wagon
----------------	---------------

Tires And Wheels (Standard)

Tires	Size (load range, ply)	P205/75R15 (B/W*)		P225/75R15 (B/W*)		
	Type (bias, radial, etc.)	Steel belted radial				
	Inflation pressure (cold) for recommended max. vehicle load	Front [kPa (psi)]	240 (35)		205 (30)	
		Rear [kPa (psi)]	240 (35)		240 (35)	
	Rev./mile—at 70 km/h (45 mph)	478		458		
Wheels	Type & material	Short spoke disc, steel				
	Rim (size & flange type)	15 x 6		15 x 7		
	Wheel offset	5.08-8.13 (0.20-0.32)		7.5 (0.30)		
	Attachment	Type (bolt or stud)	Stud			
		Circle diameter	120.6 (4.75)		127.0 (5.00)	
Number & size		5-7/16-20 UNF-2B hex nuts		5-1/2-20 UNF-2B hex nuts		
Spare	Tire and wheel (same, if other describe)	16x4 compact spare, T125/80D16 (without positraction) 16x4 compact spare, T145/80D16 (with Positraction and wagons)				
	Storage position & location (describe)	Sedans-horizontal front center of trunk compartment. Station wagon, vertical right rear quarter panel. *Tires are "All Season" mud and snow, 4th generation, GM TPG tires				

Tires And Wheels (Optional)

Size (load range, ply)	P205/75R15 (W/W*,+)	P225/75R15(W/W*,+)
Type (bias, radial, etc.)	Steel belted radial	Steel belted radial
Wheel (type & material)	Short spoke disc. steel	Short spoke disc. steel
Rim (size, flange type and offset)	15x6, Opt.15x7, 5.0, 8.13(0.20-0.32)	15x7, 7.5 (0.30)
Size (load range, ply)		
Type (bias, radial, etc.)		
Wheel (type & material)		
Rim (size, flange type and offset)	P225/70R15 (w/w) (*,+)(a)	
Size (load range, ply)	Steel belted radial	
Type (bias, radial, etc.)	Short spoke disc. steel	
Wheel (type & material)	15x7; 5.08-8.13 (0.20-0.32)	
Rim (size, flange type and offset)		
Size (load range, ply)		
Type (bias, radial, etc.)		
Wheel (type & material)		
Rim (size, flange type and offset)		
Spare tire and wheel (if configuration is different than road tire or wheel, describe optional spare tire and/or wheel location & storage position)		

(+)-Sealant tire option available with w/w tire.
 (a)-Requires performance handling package, RPO F41.

Brakes - Parking

Type of control	Foot pedal application; "T" Handle release	
Location of control	Under instrument panel; left of steering column	
Operates on	Rear service brakes	
If separate from service brakes	Type (internal or external)	--
	Drum diameter	--
	Lining size (length x width x thickness)	--

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Body Type And/Or Engine Displacement	Sedans & Coupe	Station Wagon
--------------------------------------	----------------	---------------

Steering

Manual (std., opt., n.a.)		Not available		
Power (std., opt., n.a.)		Standard and includes quick prime feature		
Adjustable steering wheel (tilt, swing, other)	Type and description	Tilt - universal jointed steering shaft at base of steering wheel - 6 position		
	(Std., opt., n.a.)	Optional		
Wheel diameter (W9) SAE J1100	Manual	Not Available		
	Power	387 (15.25)		
Turning diameter m (ft.)	Outside front	Wall to wall (l. & r.)	13.6 (44.6) 13.8 (45.3)	
		Curb to curb (l. & r.)	11.8 (38.7) 12.1 (39.7)	
	Inside rear	Wall to wall (l. & r.)	Not Available	
		Curb to curb (l. & r.)	"	
Scrub Radius*		"		
Manual	Gear	Type	Not Available	
		Make	"	
		Ratios	Gear Overall	" "
	No. wheel turns (stop to stop)		"	
Power	Type (coaxial, linkage, etc.)		Integral gear with power piston & vane type pump	
	Make		Saginaw Steering Gear	
	Gear	Type	Semi-reversible recirculating ball nut	
		Ratios	Gear	14:1 (a) 13/16:1 (b)
			Overall	16.5 (a) 18.8:1 on center (b)
Pump (drive)		'V' belt		
No. wheel turns (stop to stop)		3.16	3.3	
Linkage	Type		Parallelogram	
	Location (front or rear of wheels, other)		Front	
	Tie rods (one or two)		Two	
Steering axis	Inclination at camber (deg.)		9.785 @1	
	Bearings (type)	Upper	Ball stud with non-metallic surfaces	
		Lower	Ball stud with non-metallic surfaces	
		Thrust	None	
Steering spindle & joint type		"		
Wheel spindle	Diameter	Inner bearing	31.7 (1.25)	
		Outer bearing	19.0 (0.75)	
	Thread (size)		3/4-20	
	Bearing (type)		Tapered roller	

*The horizontal distance in the front elevation between wheel centerline and kingpin (ball joint) axle at ground.

- (a) V8 sedans and coupes
- (b) V6 sedans and coupes, V8 wagons

MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (e) _____

Body Type And/Or
Engine Displacement

Sedans & Coupe	Station Wagon
----------------	---------------

Wheel Alignment

Wheel Position	Service	Parameter	Specification	
Front wheel at curb mass (wt.)	Service checking	Caster (deg.)	+2° to +4°	
		Camber (deg.)	0° to +1.6°	
		Toe-in [outside track-mm (in.)]	+0.5° to +0.25° (1/16" to +1/4")	
	Service reset*	Caster		+3° +/- 0.5°
		Camber		+0.8° +/- 0.5°
		Toe-in		+0.15 +/- .05° (+1/8" +/- 1/16")
	Periodic M.V. inspection	Caster		+1° to +5°
		Camber		-0.7° to +2.3°
		Toe-in		-0.15° to +0.55° (-3/16" to +9/16")
Rear wheel at curb mass (wt.)	Service checking	Camber (deg.)	Not Applicable	
		Toe-in [outside track-mm (in.)]	"	
	Service reset*	Camber		"
		Toe-in		"
	Periodic M.V. inspection	Camber		"
		Toe-in		"

* Indicates pre-set, adjustable, trend set or other.

Electrical – Instruments and Equipment

Speedometer	Type	Rectangular dial with pointer (A)
	Trip odometer (std., opt., n.a.)	Optional (A)
EGR maintenance indicator		Not Available
Charge indicator	Type	Tell-Tale warning light
	Warning device	Not Available
Temperature indicator	Type	Tell-Tale warning light (A)
	Warning device	Not Available
Oil pressure indicator	Type	Tell-Tale warning light
	Warning device	Not Available
Fuel indicator	Type	Electric gauge, pointer gauge
	Warning device	Not Available
Windshield wiper	Type (standard)	Electric, two-speed
	Type (optional)	Intermittent control type
	Blade length	457.2 (18.0 in)
	Swept area [cm ² (in. ²)]	6107 (946.8 in ²)
Windshield washer	Type (standard)	Push button* fluidic nozzle
	Type (optional)	Not Available
	Fluid level indicator	"
Horn	Type	Vibrator
	Number used	Dual-1B00 models: one (low note) on 1B00 models

Other
 Restraint system warning light and buzzer. Parking brake and brake failure warning light.
 "Tailgate ajar" lamp for station wagon.
 "Headlamp-on" chime for 1B00 models.

(A) Optional gage package includes circular speedometer, trip odometer, coolant temperature gage, and fuel economy (vacuum) gage.
 (B) Buzzer for 1B00, Chime for 1B00.

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) 9-85

METRIC (U.S. Customary)

Engine Description/Carb.
Engine Code

4.3L V6 262 CID RPO LB4	5.0L V8 305 CID RPO LG4
-------------------------------	-------------------------------

Electrical - Supply System

Battery	Make	Delco Remy	
	Model, std., (opt.)	75-630	70-525 Base, 75.570 H.D.
	Voltage	12 Volts	
	Amps at 0°F cold crank	630	525 Base, 570 H.D.
	Minutes-reserve capacity	90	75 Base, 90 H.D.
	Amp/hrs. - 20 hr. rate	--	
	Location	Engine Compartment	
Generator or alternator	Type and rating	56	56
	Ratio (alt. crank/rev.)		2.36:1
	Optional (type & rating)	None	
Regulator	Type	Micro circuit units, integral with alternator	

Electrical - Starting System

Start, motor	Current drain at 0°F		420 @ -20°F
Motor drive	Engagement type	Positive shift solenoid	
	Pinion engages from (front, rear)		Rear

Electrical - Ignition System

Type	Electronic (std., opt., n.a.)	--	
	Other (specify)	High Energy Ignition, (H.E.I.)	
Coil	Make	Delco Remy	
	Model	Integral with distributor	
	Current	Engine stopped - A	--
Engine idling - A		--	
Spark plug	Make	AC	
	Model	R43TS	R43TS*
	Thread (mm)	14 x 1.25	
	Tightening torque (N·m (lb. ft))	9-20 (7-15)	
	Gap	0.81 (.035)	0.81 (0.035)
	Number per cylinder	One	
Distributor	Make	Delco Remy	
	Model		T103460

Electrical - Suppression

Locations & type: Internal alternator capacitor, non-metallic high-tension ignition cables, resistor spark plugs, ignition coil by-pass capacitor, internal AC blower motor by-pass capacitor & A/C compression diode, with radio provisions; hood grounding clip, engine to dash panel ground strap, fuse block capacitor and on "heater only" blower motors and coax capacitor.

* R45TS for Canada except "B" police and taxi; R44TS with 1.14mm (0.045") for Canadian police and taxi.

MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

Body Type	4-Door Sedans 1BL69 - 1BN69	2-Door Coupe 1BN47	4-Door Station Wagon 1BN35
------------------	--------------------------------	-----------------------	-------------------------------

Body

Structure	All-welded heavy-gage steel body. Full perimeter frame.
Bumpers system front - rear	Steel bumper with reinforcing beam. Dual enersorbers. Bumper rub strips standard on Caprice Classic coupe and sedan. Optional others.
Anti-corrosion treatment	Zinc-rich precoated steel is used in many critical areas, splash areas treated with zinc-rich primers and special waxes. Hot-melt materials used for sealing. Bodies are submersed in zinc phosphate rustproofing process before final elpo-coating dip.

Body - Miscellaneous Information

Type of finish (lacquer, enamel, other)	Lacquer	
Hood	Hinge location (front, rear)	Rear
	Type (counterbalance, prop)	4-Link type with spiral spring
	Release control (internal, external)	Internal
Trunk lid	Type (counterbalance, other)	Counterbalance
	Internal release control (elec., mech., n.a.)	Electric - optional
Hatch-back lid	Type (counterbalance, other)	Not applicable
	Internal release control (elec., mech., n.a.)	Not applicable
Vent window control (crank, friction, pivot, power)	Front	None
	Rear	None
Seat cushion type (e.g., 60/40, bucket, bench, wire, foam etc.)	Front	Bench, formed full foam pad
	Rear	Bench, formed full foam pad
	3rd seat	Bench, formed full foam pad
Seat back type (e.g., 60/40, bucket, bench, wire, foam etc.)	Front	Bench, formed full foam pad
	Rear	Bench, formed full foam pad
	3rd seat	Bench, formed full foam pad

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

Body Type	4-Door Sedans	2 Door Coupe	4-Door Station Wagons
	1B169	1B169	1B135

Restraint System

Active restraint system	Standard/optional	Standard
	Type and description	3 point shoulder and lap belt for driver and RH front passenger. Lap belt for all other positions.
	Location	Front - (3); Rear - (3); Station Wagon 3rd seat - (2)
Passive seat belts	Standard/optional	Not available
	Power/manual	--
	2 or 3 point	--
	Knee bar/lap belt	--

Frame

Type and description (separate frame, unitized frame, partially-unitized frame)	Perimeter type, two crossmembers
---	----------------------------------

Glass

	SAE Ref. No.			
Windshield glass exposed surface area [cm ² (in. ²)]	S1	8619 (1335.9)		
Side glass exposed surface area [cm ² (in. ²)] - total 2-sides	S2	12006 (1860.9)	10995 (1704.2)	19950 (3092.2)
Backlight glass exposed surface area [cm ² (in. ²)]	S3	5278 (818.1)	5567 (862.9)	4661 (722.5)
Total glass exposed surface area [cm ² (in. ²)]	S4	25903 (4015.0)	25181 (3903.1)	33230 (5150.6)
Windshield glass (type)		Curved - Laminated Plate		
Side glass (type)		Curved - Tempered Plate		
Backlight glass (type)		Curved - Tempered Plate		

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

Body Type

4-Door Sedans 1BL69 1BN69	2-Door Coupe 1BN47	4-Door Station Wagon 1BN35
--------------------------------	-----------------------	-------------------------------

Convenience Equipment (standard, optional, n.a.)

Air conditioning (manual, auto. temp control)	Optional - Four season manual control	
Clock (digital, analog)	Analog Std 1BNO0, Opt 1BL69. Digital Opt in stereo radios	
Compass / thermometer	Compass - dealer installed	
Console (floor, overhead)	Not Available	
Defroster, elec. backlight	Optional	
Electronic	Diagnostic warning (integrated, individual)	Not Available
	Instrument cluster (list instruments)	Not Available
	Keyless entry	Not Available
	Tripminder (avg. spd., fuel)	Not Available
	Voice alert (list items)	Not Available
	Other	Radio tuning
	--	
Fuel door lock (remote, key, electric)	Not Available	
Lamps	Auto head on / off delay, dimming	Not Available
	Cornering	Optional
	Courtesy (map, reading)	Optional (2) in dome-lamp
	Door lock, ignition	Not Available
	Engine compartment	Optional
	Fog	Not Available
	Glove compartment	Standard
	Trunk	Standard Rear dome standard
Other	--	
	--	
Mirrors	Day/night (auto. man.)	Manual-standard
	L.H. (remote, power, heated)	Remote-optional
	R. H. (convex, remote, power, heated)	Convex, manual or remote - optional
	Visor vanity (RH / LH, illuminated)	Optional - RH
Parking brake-auto release (warning light)	Standard - hand release	
Power equipment	Door locks / deck lid - specify	Door & tailgate locks Opt, deck lid release Opt
	Seat (2-4-6 way) heated (driver, pass, other) lumbar, hip, thigh support (power, manual) reclining (driver, pass) memory (1-2 preset, recline)	Optional - 6 way 50/50 power bench (left only) - 6 way power bench
	Side windows	Optional (door windows only)
	Vent windows	Not Available
	Rear window	Not Available Standard
		--
Radio systems	Antenna (location, whip, w/shield, power)	Fixed mast, RH front fender. Power Opt
	AM, FM, stereo, tape, CB	Optional - AM, AM/FM, Stereo, Cassette
	Speaker (number, location) Premium sound	2 in inst panel, 2 in rear shelf or wgn rear pillars (A)
Roof open air/fixd (flip-up, sliding, "T")	Not Available	
Speed control device	Optional	
Speed warning device (light, buzzer, etc.)	Not Available	
Tachometer (rpm)	Not Available	
Theft protection-type	Lock mounted on steering column; locks steering wheel, transmission shift lever and ignition.	

(A) Premium sound available for coupe and sedans.

MVMA Specifications Form

Car Line CHEVROLET

Model Year 1986 Issued 7-85 Revised (e) 9-85

Passenger Car

METRIC (U.S. Customary)

Car and Body Dimensions See Key Sheets for definitions

All dimensions to ground are for comparative purposes only. Dimensions are to be shown for all base body models of each car line. SAE Ref. no. refers to the definition published in SAE Recommended Practice J1100 "Motor Vehicle Dimensions," unless otherwise specified.

Body Type	SAE Ref. No.	4-Door Sedan 1BL69	4-Door Sedan 1BN69	2-Door Coupe 1BN47	4-Door Station Wagon 1BN35
Width					
Tread (front)	W101	1568 (61.7)			1578 (62.2)
Tread (rear)	W102	1542 (60.7)			1628 (64.1)
Vehicle width	W103	1914 (75.4)			2014 (79.3)
Body width at Sg RP (front)	W117	1910 (75.2)			
Vehicle width (front doors open)	W120	3291 (129.6)		4002 (157.6)	3291 (129.6)
Vehicle width (rear doors open)	W121	3470 (6)		--	3426 (134.9)
Front fender overall width	W106	1900 (74.8)			
Rear fender overall width	W107	1911 (75.2)			2014 (79.3)
Tumble-home (deg.)	W122	24.5		25.5	24.5

Length

Wheelbase	L101	2945 (116.0)			
Vehicle length	L103	5386 (212.2)	5405 (212.8)*		5464 (215.1)
Overhang (front)	L104	1030 (40.6)	1039.5(40.9)*		1030 (40)
Overhang (rear)	L105	1411 (55.6)	1420.5(55.9)*		1489
Upper structure length	L123	2366 (93.1)		2398 (94.4)	3506 (138.0)
Rear wheel C/L "X" coordinate	L127	2475 (97.4)			
Cowl point "X" coordinate	L125	236 (9.3)		239 (9.4)	235 (9.3)
Front end length at centerline	L126	1623 (63.9)			
Rear end length at centerline	L129	1150 (45.3)		1115 (43.9)	100 (3.9)

*Rub strips standard equipment on Caprice Classic sedan and coupe.

Height **

Passenger distribution (front/rear)	PD1,2,3				**
Trunk/cargo load					**
Vehicle height	H101	1433 (56.4)			1478 (58.2)
Cowl point to ground	H114	1000 (39.4)			1010 (39.8)
Deck point to ground	H138	1023 (40.3)			--
Rocker panel-front to ground	H112	233 (9.2)			242 (9.5)
Bottom of door closed-front to grd.	H133	295 (11.6)			295 (11.6)
Rocker panel-rear to ground	H111	242 (9.5)			252 (9.9)
Bottom of door closed-rear to grd.	H135	297 (11.7)		--	306 (12.0)
Windshield slope angle	H122	53.5		54.0	53.5
Backlight slope angle	H121	41.5		46.0	32.5

Ground Clearance **

Front bumper to ground	H102	306 (12.1)			314 (12.4)
Rear bumper to ground	H104	359 (14.1)	362 (14.3)		301 (11.8)
Bumper to ground (front at curb mass (wt.))	H103	333 (13.1)			332 (13.1)
Bumper to ground (rear at curb mass (wt.))	H105	377 (14.8)	380 (15.0)	380 (15.0)	311 (12.2)
Angle of approach (degrees)	H106	18.0°			18.5°
Angle of departure (degrees)	H107	14.0°			12.4°
Ramp breakover angle (degrees)	H147	14.1°			14.5°
Axle differential to ground (front/rear)	H153	192 (7.6)			194 (7.6)
Min. running ground clearance	H156	148 (5.8)	187 (7.4)		200 (7.9)
Location of min. run. grd. clear.		Front suspension			

**All Vehicle Height And Ground Clearances Are Made Using EPA Loaded Vehicle Weight, Loading Conditions.

EPA LOADED VEHICLE WEIGHT is The Base Vehicle Weight Plus All Coolant And Fluids Necessary For Operation Plus 100% Of The Fuel Capacity, Plus The Weight Of All Options And Accessories Which Weigh Three Pounds Or More And Which Are Sold On At Least 33% Of The Car Line, Plus Two Occupants.

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)
Car and Body Dimensions See Key Sheets for definitions

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

Body Type	SAE Ref. No.	4-Door Sedans	2-Door Coupe	4-Door Station Wagon
		1B169	1B147	1B135

Front Compartment

Sg RP front, "X" coordinate	L31	1078 (42.4)		
Effective head room	H61	1003 (39.5)	997 (39.3)	979 (38.5) 1005 (39.6)
Max. eff. leg room (accelerator)	L34	1072 (42.2)		
SgRP to heel point	H30	220 (8.7)		
SgRP to heel point	L53	876 (34.5)		
Back angle	L40	26.5		
Hip angle	L42	97.0		
Knee angle	L44	127.0		
Foot angle	L46	87.0		
Design H-point front travel	L17	163 (6.4)		
Normal driving & riding seat track trvl.	L23	143 (5.6)		
Shoulder room	W3	1536 (60.5)	1546 (60.9)	
Hip room	W5	1398 (55.0)		1400 (55.1)
** Upper body opening to ground	H50			
Steering wheel maximum diameter	W9	387 (15.2)		
Steering wheel angle	H18	19.0		
Accel. heel pt. to steer. whl. cntr	L11			
Accel. heel pt. to steer. whl. cntr	H17			
Steering wheel to C/L of thigh	H13	105 (4.1)		104 (4.1)
Steering wheel torso clearance	L7	342 (13.5)		
Headlining to roof panel (front)	H37	13 (0.5)	19 (0.7)	14 (0.6)
Undepressed floor covering thickness	H67	6 (0.2)		

All Interior Dimensions Are Measured With The Seating Reference Point (SgRP) _____ mm (1 Seat Adjuster Notch) Forward Of Rearmost Seat Position.

Rear Compartment

Sg RP Point couple distance	L50	882 (34.7)	872 (34.3)	844 (33.2)
Effective head room	H63	971 (38.2)	965 (38.0)	999 (39.3)
Min. effective leg room	L51	992 (39.1)		972 (38.3) 959 (37.8)
Sg RP (second to heel)	H31	292 (11.5)	269 (10.6)	307 (12.1)
Knee clearance	L48	91 (3.6)	79 (3.1)	51 (2.0)
Compartment room	L3	736 (29.0)	737 (29.0)	720 (28.3)
Shoulder room	W4	1537 (60.5)	1546 (60.9)	1490 (58.7) 1548 (60.9)
Hip room	W6	1405 (55.3)	1464 (57.6)	1398 (55.0)
** Upper body opening to ground	H51			
Back angle	L41	25.0°		26.5°
Hip angle	L43	92.5	89.0	92.0
Knee angle	L45	108.0	103.5	101.0
Foot angle	L47	127.0	127.5	122.0
Headlining to roof panel (second)	H38	12 (0.5)	18 (0.7)	19 (0.7) 30 (1.2)
Depressed floor covering thickness	H73	18 (0.7)		

Luggage Compartment

Usable luggage capacity [L (cu. ft.)]	V1	592L (20.9 cu. ft.)	--
** Liffover height	H195	827 (32.6)	--

Interior Volumes (EPA Classification)

Vehicle class (subcompact, compact, etc.)	Large		
Interior volume index (cu. ft.)	110.3	1106.3	110.5
Trunk/cargo index (cu. ft.)	20.9		50.3

All linear dimensions are in millimeters (inches).
 ** EPA Loaded Vehicle Weight, Loading Conditions

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)
Car and Body Dimensions

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

See Key Sheets for definitions

Body Type

SAE Ref. No.	Station Wagon - 3 Seat 1BN35
--------------	---------------------------------

Station Wagon - Third Seat

Sg RP couple distance	L85	985 (38.8)
Shoulder room	W85	1240 (48.8)
Hip room	W86	1109 (43.7)
Effective leg room	L86	782 (30.8)
Effective head room	H86	948 (37.3)
Sg RP to heel point	H87	257 (10.1)
Knee clearance	L87	317 (12.5)
Seat facing direction	SD1	Rearward
Back angle	L88	25.0°
Hip angle	L89	76.5
Knee angle	L90	70.5
Foot angle	L91	114.5

Station Wagon - Cargo Space

Cargo length (open front)	L200	2790 (109.8)
Cargo length (open second)	L201	1907 (75.1)
Cargo length (closed front)	L202	2290 (90.2)
Cargo length (closed second)	L203	1407 (55.4)
Cargo length at belt (front)	L204	2129 (83.8)
Cargo length at belt (second)	L205	1222 (48.1)
Cargo width (wheelhouse)	W201	1224 (48.2)
Rear opening width at floor	W203	1238 (48.7)
Opening width at belt	W204	1224 (48.2)
Max. rear opening width above belt	W205	988 (38.9)
Cargo height	H201	755 (29.7)
Rear opening height	H202	729 (28.7)
Tailgate to ground height	H250	768 (30.2)
Front seat back to load floor height	H197	--
Cargo volume index [m ³ (ft. ³)]	V2	2488L (87.9 cu. ft.)
Hidden cargo volume [m ³ (ft. ³)]	V4	Not Available
Cargo volume index-rear of 2-seat	V10	1428L (50.4 cu. ft.)

Hatchback - Cargo Space

Cargo length at front seatback height	L208	
Cargo length at floor (front)	L209	Not Applicable
Cargo length at second seatback height	L210	
Cargo length at floor (second)	L211	
Front seatback to load floor height	H197	
Second seatback to load floor height	H198	
Cargo volume index [m ³ (ft. ³)]	V3	
Hidden cargo volume [m ³ (ft. ³)]	V4	
Cargo volume index-rear of 2-seat	V11	

Aerodynamics*

		4-Door Sedans	2-Door Coupe	Station Wgn
Wheel lip to ground, front	H172	709 (27.9)		715 (28.1)
Wheel lip to ground, rear	H173	712 (28.0)		723 (28.5)
Frontal area [m ² (ft ²)]		2.22 (0.087)		2.44 (0.096)
Drag coefficient (Cd)		Not Available		

* EPA Loaded Vehicle Weight, Loading Conditions

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (•) _____

Body Type	4-Door Sedans	2-Door Coupe	4-Door Station Wagon
	1BL69 1BN69	1BN47	1BN35

Vehicle Fiducial Marks

Fiducial Mark Number*	Define Coordinate Location		
Front	X -	Fiducial marks to vertical base grid line-front, measured horizontally from the base grid line to the front fiducial mark located on top of the front seat adjuster mounting bolt.	
	Y -	Fiducial mark to centerline of car-front, width measurement made from centerline of car to fiducial mark located on top of the front seat adjuster mounting bolt.	
	Z -	Fiducial mark to horizontal base grid line-front, measured vertically from base grid line to front fiducial mark located on top of the front seat adjuster mounting bolt.	
Rear	X -	Fiducial mark to vertical base grid line-rear measured horizontally from base grid line to the rear fiducial mark located on rail (compartment pan - longitudinal).	
	Y -	Fiducial mark to centerline of car-rear, width measurement made from centerline of car to fiducial mark located on the rail (compartment pan - longitudinal).	
	Z -	Fiducial mark to horizontal base grid line-rear, measured vertically from base grid line to the rear fiducial mark located on rail (compartment pan - longitudinal).	
Front	W21	564 (22.2)	
	L54	754 (29.7)*	
	H81	9 (0.4)#	
	H161	348 (13.7)	349 (13.7)
	** H163	325 (12.8)	332 (13.1)
Rear	W22	254 (10.0)	302 (11.9)
	L55	3533 (139.1)*	3440 (135.4)*
	H82	86 (3.4)#	-34 (-1.3)#
	H162	449 (17.7)	331 (13.0)
	** H164	431 (17.0)	319 (12.6)
	* Vertical Base Grid 2000 mm Line. # Horizontal Base Grid 500 mm Line.		

* Reference - SAE Recommended Practice, J182, Motor Vehicle Fiducial Marks.
 All linear dimensions are in millimeters (inches).
 ** EPA Loaded Vehicle Weight, Loading Conditions

MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (*) _____

Body Type

4-Door Sedans 1BL69	1BN69	2-Door Coupe 1BN47	4-Door Station Wagon 1BN35
------------------------	-------	-----------------------	-------------------------------

Lamps and Headlamp Shape*

Height above ground to center of bulb or marker	Headlamp (SAE - H127)	Highest**	706.5(27.8)		705.9(27.8)
		Lowest	705.6(27.8)		705.0(27.8)
	Taillamp (SAE - H128)	Highest**	707.1(27.8)		727.5(28.6)
		Lowest	704.4 (27.7)		--
	Sidemarker	Front	665.0(26.2)		664.4(25.4)
		Rear	699.0(27.5)		588.7(23.2)
Distance from C/L of car to center of bulb	Headlamp	Inside	562.0(22.1)	566.0(22.3)	566.0(22.3)
		Outside**	737.2(29.0)	741.2(29.2)	741.2(29.2)
	Taillamp	Inside	419.0(16.5)	370.0(14.6)	906.6(35.7)
		Outside**	775.0(30.5)	779.0(30.7)	916.0(36.1)
	Directional	Front	721.0(28.4)		721.0(28.4)
		Rear	775.0(30.5)	779.0(30.7)	916.0(36.1)
Halogen headlamp (std., opt., n.a.)	Lo beam	Optional			
	Hi beam	Optional			
	Replaceable bulb	Not available (sealed beam)			
	Shape	Rectangular			
Headlamp other than above	Lo beam	Conventional			
	Hi beam	Conventional			
	Replaceable	Sealed beam - entire unit replaced			
	Shape	Rectangular			
	Type	Quad lamp system			

* Measured at curb mass (weight).
 ** If single lamps are used enter here.

MVMA Specifications Form Passenger Car

Car Line CHEVROLET

Model Year 1986 Issued 7-85 Revised (*) _____

METRIC (U.S. Customary)

Model	Vehicle Mass (weight)							SHIPPING MASS, kg (weight, lb.)**
	CURB MASS, kg. (weight, lb.)*			% PASS. MASS DISTRIBUTION				
	Front	Rear	Total	Pass In Front		Pass In Rear		
				Front	Rear	Front	Rear	
Caprice								
4-Door Sedan 1B169 (a)	862.4 (1901)	741.1 (1634)	1603.5 (3535)					1541.9 (3399)
Caprice Classic								
4-Door Sedan 1B169 (a)	868.2 (1914)	748.3 (1650)	1616.5 (3564)					1554.9 (3428)
2-Door Coupe 1B147 (a)	863.8 (1904)	745.0 (1642)	1608.8 (3546)					1547.2 (3411)
4-Door, 3-Seat (b) Station Wagon 1B135	882.5 (1946)	974.8 (2149)	1857.4 (4095)					1804.0 (3977)
(a) with V6 - 262 CID 4.3 Liter Engine								
(b) with V8 - 305 CID 5.0 Liter Engine								
Curb Weight - The calculated weight of a vehicle with standard equipment only as designed with the additional load of oil, lubes, coolants, and fuel all filled to capacity.								
Shipping Weight - Same as base curb weight, except 3 gallons of gasoline.								

* Reference - SAE J1100 Motor vehicle dimensions, curb weight definition.
 ** Shipping mass (weight) definition -

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Equipment	Optional Equipment Differential Mass (weight)*			Remarks
	MASS, kg. (weight, lb.)			
	Front	Rear	Total	
Power Front Seat 6-Way	2.6	2.4	5.0	1BN00 Models only.
Pass., Split Bench (Used with AG1, AG9, AM6 or AV7)	(5.7)	(5.3)	(11.0)	
Requires A31 RPO AG2				
Power Front Seat 6-Way	2.6	2.4	5.0	All Models
(Used with RPO-AG1 or A42.) RPO-AG9	(5.7)	(5.3)	(11.0)	
Reclining Seat Back	4.8	9.6	14.4	1BN00 Models only.
- Requires RPO - AV7	(10.6)	(21.2)	(31.8)	
- R.H. Seat back only. RPO-AT6				
Electric Side Door Lock System RPO-AU3	1.0	0.8	1.8	2-Door Model
	(2.2)	(1.8)	(4.0)	
	1.8	1.4	3.2	4-Door Models
	(4.0)	(3.1)	(7.1)	
Front Seat - 50/50	4.8	9.6	14.4	1BN00 Models
RPO-AV7	(10.6)	(21.2)	(31.8)	
Electric Window Control	1.4	1.0	2.4	2-Door Models
RPO-A31	(3.1)	(2.2)	(5.3)	
	2.4	2.6	5.0	4-Door Models
	(5.3)	(5.7)	(11.0)	
Trunk Lid Release - Electric-Remote.RPO-A90	0	.6	.6	1BL69, 1BN47-69.
	(0)	(1.3)	(1.3)	
Deluxe Cargo Area Carpet. (Consists of RPO-B39) RPO-BC5	0	.6	.6	1BN35
	(0)	(1.3)	(1.3)	
Acoustical Insulation Package (Quiet sound Group.) RPO-BS1	3.2	5.6	8.8	1BL69, Base on 1BN00 models.
	(7.0)	(12.4)	(19.4)	
Woodgrain Applique and Molding (Body side and Tailgate. Not with RPO-D84.) RPO-BX3	.8	1.6	2.4	1BN35 Caprice Estate
	(1.8)	(3.5)	(5.3)	

*Also see Engine - General Section for dressed engine mass (weight).

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (•) _____

METRIC (U.S. Customary)

Equipment	Optional Equipment Differential Mass (weight)*			Remarks
	MASS, kg. (weight, lb.)			
	Front	Rear	Total	
Power Tailgate Lock (Includes RPO-AU6.) RPO-B1Q	-.2 (-0.4)	1.2 (2.6)	1.0 (2.2)	1BN35
Floor Mats - Rear (Carpeted) RPO-B35	.4 (0.9)	.6 (1.3)	1.0 (2.2)	All models
Floor Mats - Front (Carpeted) RPO-B34	1.2 (2.6)	.4 (0.9)	1.6 (3.5)	All models
Carpet - Deluxe Load Floor-Color Keyed RPO-B39	-.4 (-0.9)	2.6 (5.7)	2.2 (4.8)	1BN35
Brougham Model Option Consists of: AM6, BF2, BW7, C09, BW8, C71, B03 & TR9 RPO-B45	2.4 (5.3)	2.2 (4.8)	4.6 (10.1)	1BN69
Deluxe Luggage Compartment Trim RPO-B48	0 (0)	3.0 (6.6)	3.0 (6.6)	1BL69, 1BN47-69
Body Side Molding (Included in RPO-7X5) RPO-B84	.2 (0.4)	.6 (1.3)	.8 (1.8)	All models
Door Edge Guards (Not available with RPO-BX3) RPO-B93	.2 (0.4)	0 (0)	.2 (0.4)	All models
Moldings - Wheel Opening RPO-B96	.4 (0.9)	.4 (0.9)	.8 (1.8)	1BL69, base on 1BN00 models
Windshield Wipers and Washers - Pulse type RPO-CD4	.2 (0.4)	0 (0)	.2 (0.4)	All models
Vinyl Roof Cover - Full Padded RPO-C09	1.2 (2.6)	2.2 (4.8)	3.4 (7.5)	1BL69, 1BN69

*Also see Engine - General Section for dressed engine mass (weight).

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (•) _____

METRIC (U.S. Customary)

Equipment	Optional Equipment Differential Mass (weight)*			Remarks
	MASS, kg. (weight, lb.)			
	Front	Rear	Total	
Electroclear Rear	0	.6	.6	1B169 - 1B147 & 69
Window Defogger (Consists RPO-K73 or K81)	(0)	(1.3)	(1.3)	
RPO-C49	0	.8	.8	1B135
	(0)	(1.8)	(1.8)	
Air Deflector, Rear	0	2.6	2.6	1B135
Window, (Forces RPO-V55)	(0)	(5.7)	(5.7)	
RPO-C51				
Air Conditioning-Manual Control. (Consists of RPO-K64) RPO-C60	25.0 (55.1)	1.6 (3.5)	26.6 (58.6)	With 1B169 and RPO-LB4
	24.0 (52.9)	1.6 (3.5)	25.6 (56.4)	With 1B100 and RPO-LB4
	28.2 (62.2)	1.6 (3.5)	29.8 (65.7)	With 1B169 and RPO-LG4
Air Conditioning - Manual Control (Consists of RPO-K64) RPO-C60	27.2 (60.0)	1.6 (3.5)	28.8 (63.5)	With 1B100 and RPO-LG4
	29.6 (65.2)	1.6 (3.5)	31.2 (68.7)	With 1B169 and RPO LM1
Outside Mirror - Remote Control LH only - Painted RPO-D33	.4 (0.9)	0 (0)	.4 (0.9)	All models
Outside Sport Mirrors - LH Remote Control, RH Manual Painted RPO-D35	1.0 (2.2)	.4 (0.9)	1.4 (3.1)	All models
Visor Vanity Mirror - RH Visor-Illuminated. RPO-D64	.4 (0.9)	0 (0)	.4 (0.9)	All models
Outside Mirrors - LH and RH Remote Control, Painted RPO-D68	1.4 (3.1)	.4 (0.9)	1.8 (4.0)	All models
Sport Suspension Equipment - Front & Rear. Requires RPO-QHK. Consists of PH1. RPO-F41	3.0 (6.6)	11.4 (25.1)	14.4 (31.7)	1B169, 1B147-69

*Also see Engine - General Section for dressed engine mass (weight).

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (*) 9-85

METRIC (U.S. Customary)

Equipment	Optional Equipment Differential Mass (weight)*			Remarks
	MASS. kg. (weight, lb.)			
	Front	Rear	Total	
Air Booster Rear Shock Absorbers. RPO-G66	0 (0)	1.0 (2.2)	1.0 (2.2)	1B135
Engine Block Heater RPO-K05	.4 (0.9)	0 (0)	.4 (0.9)	All models
Cruise Control - 3 Mode (Cruise Master), with Resume Feature. RPO-K34	1.4 (3.1)	.4 (0.9)	1.8 (4.0)	All models
Engine 5.0 Liter 4-Bbl. (305 C.I.D.) V8. RPO-L64	41.0 (90.4)	1.0 (2.2)	42.0 (92.6)	Opt all models. (standard on 1B135)
Engine 5.7 Liter 4-Bbl. (350 C.I.D.) V8. RPO-LM1	66.8 (147.3)	5.8 (12.8)	72.6 (160.1)	1B169 - Police only
Automatic Transmission 4-Speed, with Overdrive. RPO-MX0	2.0 (4.4)	1.0 (2.2)	3.0 (6.6)	1B169, 1B147-69, 35
Tilt Steering Column (Comfortilt. RPO-N33)	.8 (1.8)	.2 (0.4)	1.0 (2.2)	All models
Simulated Wire Wheel Covers. RPO-N91	2.8 (6.2)	2.8 (6.2)	5.6 (12.4)	All models
Wheel Trim Covers - Sport RPO-PB2	.8 (1.8)	.8 (1.8)	1.6 (3.6)	All models
Auxiliary Lighting Group Consists of:	.2 (0.4)	0 (0)	.2 (0.4)	All models
-Underhood Lamp RPO-U26				All
-Ash Tray Lamp RPO-U28				1B169 (Std on 1B100)
-I.P. Courtesy Lamps RPO-U29				1B169 (Std on 1B100)
-Dome Reading Lamp RPO-C95				1B100
-Headlamp Reminder Buzzer RPO-T63				1B169 (Chime Std on 1B100)
Lighting Pkg RPO-TR9				
Lamps - Cornering RPO-T87	1.4 (3.1)	-.2 (-0.4)	1.2 (2.7)	All models

*Also see Engine - General Section for dressed engine mass (weight).

MVMA Specifications Form Passenger Car

Car Line CHEVROLET
 Model Year 1986 Issued 7-85 Revised (e) _____

METRIC (U.S. Customary)

Equipment	Optional Equipment Differential Mass (weight)*			Remarks
	MASS, kg. (weight, lb.)			
	Front	Rear	Total	
Heavy Duty Battery RPO-UA1	2.8 (6.2)	-.4 (-0.9)	2.4 (5.3)	With RPO-LB4, LG4, LM1
Gauge Package Consists of:	.4 (0.9)	0 (0)	.4 (0.9)	All Models
Gages and Trip Odometer RPO-UF7				
AM/FM Stereo Radio (ETR) Full Feature Consists of U64, UP8 RPO-UK4				All Models
AM/FM Stereo Radio with Clock Cassette Player -Consists of RPO-U64, UP8 RPO-UM6	2.0 (4.4)	1.0 (2.2)	3.0 (6.6)	All models
AM/FM Stereo Radio with Equalizer, Cassette, Clock -Consists of RPO U79, U64 UP8 RPO UM6	2.0 (4.4)	.8 (1.8)	2.8 (6.2)	All models
AM/FM Stereo Radio (ETR) Full Feature with Clock Consists of U64, UP8. RPO-UM7				All models
Electric Clock- Non-Digital RPO-U35	.2 (0.4)	0 (0)	.2 (0.4)	1B169, Standard on 1BNO0 models
AM Radio-Consists of RPO-UP7. RPO-U63	2.6 (5.7)	.6 (1.3)	3.2 (7.0)	All models
Power Antenna Consists of RPO-UN9 Radio Suppression Equip. RPO-U75	1.4 (3.1)	.2 (0.4)	1.6 (3.5)	All models

*Also see Engine - General Section for dressed engine mass (weight).

**MVMA Specifications Form
Passenger Car**

Car Line CHEVROLET
Model Year 1986 Issued 7-85 Revised (*) _____

METRIC (U.S. Customary)


Equipment	Optional Equipment Differential Mass (weight)*			Remarks
	MASS, kg. (weight, lb.)			
	Front	Rear	Total	
Four Speaker System RPO-U64	.6 (1.3)	1.0 (2.2)	1.6 (3.5)	All models Two front, two rear
Speakers, Extended Range Dual Front, Dual Rear Used with UK4, UM6, UM7 or UM6 RPO-U79	.6 (1.3)	1.2 (2.6)	1.8 (4.0)	1B169, 1BN47-69
Bumper Impact Strips - Front and Rear RPO-VE5	.8 (1.8)	.8 (1.8)	1.6 (3.6)	Optional 1B169-1BN35, Base Equipment 1BN47-69
Cooling-Heavy Duty RPO-V08	3.6 (7.9)	-.4 (-0.9)	3.2 (7.0)	All models
Bumper Guards, Front and Rear. RPO-V30	1.2 (2.6)	1.2 (2.6)	2.4 (5.3)	1B169, 1BN47-69
	1.2 (2.6)	1.0 (2.2)	2.2 (4.8)	1BN35
Roof Luggage Carrier RPO-V55	0 (0)	6.2 (13.7)	6.2 (13.7)	1BN35
Landau Vinyl Roof Cover Consists of: CB7, B72, BY1, D35 RPO-Z03				1BN47

*Also see Engine - General Section for dressed engine mass (weight).


MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Exterior Car And Body Dimensions – Key Sheet


Exterior Width

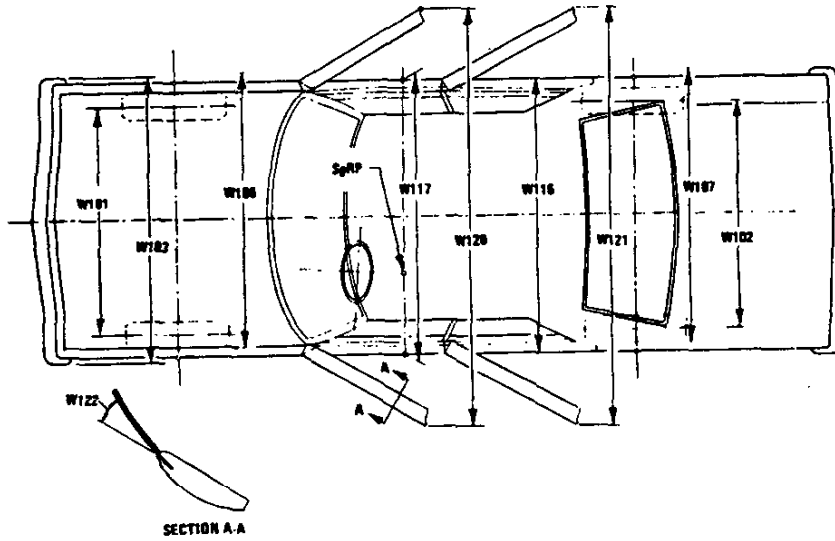

Exterior Length & Height

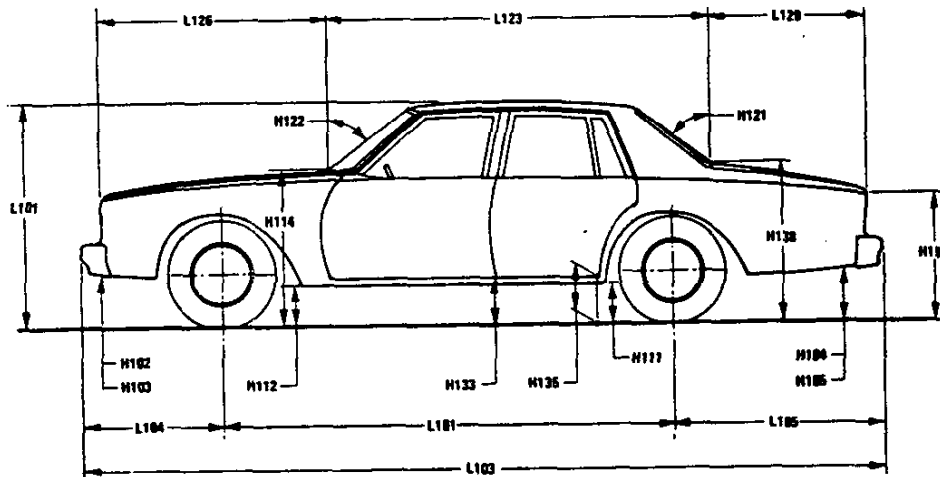

Exterior Ground Clearance






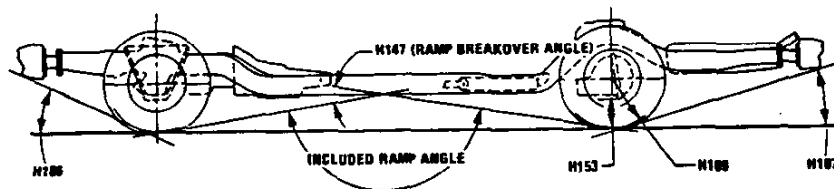


MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)



Interior Car And Body Dimensions – Key Sheet

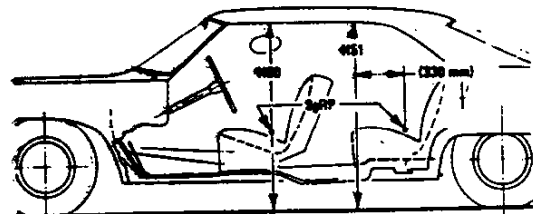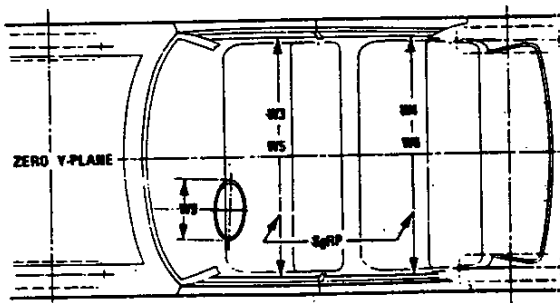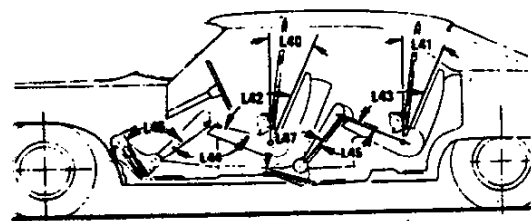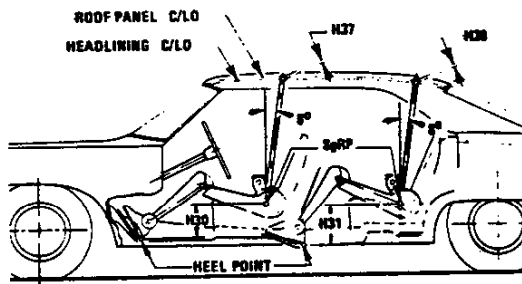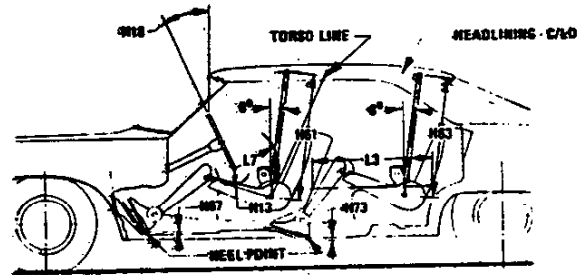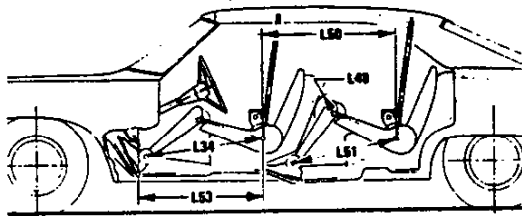



MVMA Specifications Form
Passenger Car
METRIC (U.S. Customary)

Interior Car And Body Dimensions – Key Sheet


Third Seat

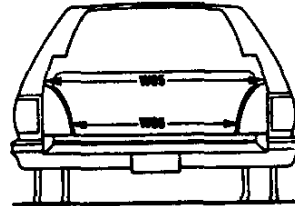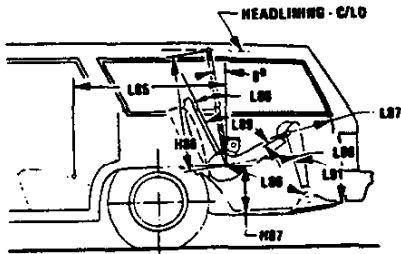

Cargo Space

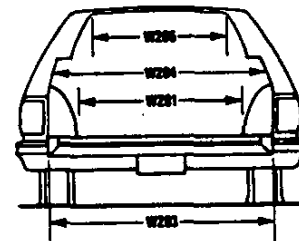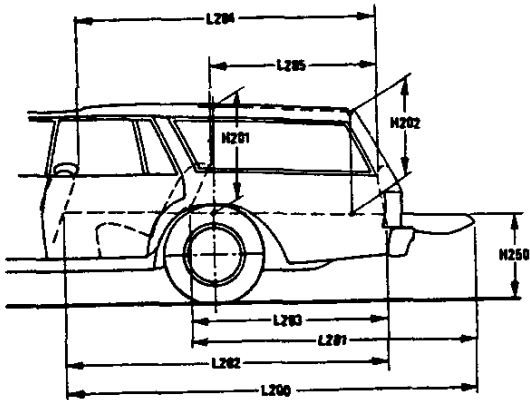

Station Wagon

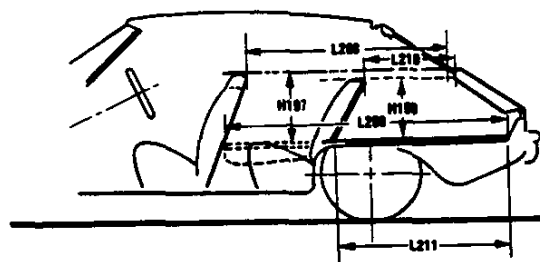

Hatchback

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Exterior Car And Body Dimensions – Key Sheet

Dimensions Definitions

Seating Reference Point

SEATING REFERENCE POINT means the manufacturer's design reference point which—

- (a) Establishes the rearmost normal design driving or riding position of each designated seating position in a vehicle;
- (b) Has coordinates established relative to the design vehicle structure;
- (c) Simulates the position of the pivot center of the human torso and thigh; and
- (d) Is the reference point employed to position the two dimensional templates described in SAE Recommended Practice J826, "Devices for Use in Defining and Measuring Vehicle Seating Accommodations."

Width Dimensions

- W101 TREAD—FRONT. The dimension measured between the tire centerlines at the ground.
- W102 TREAD—REAR. The dimension measured between the tire centerlines at the ground. In case of dual wheels, the dimension will be measured to the centerline of tire and wheel assemblies.
- W103 VEHICLE WIDTH. The maximum dimension measured between the widest point on the vehicle, excluding exterior mirrors, flexible mud flaps, marker lamps, but including bumpers, moldings, sheet metal protrusions or dual wheels, if standard equipment.
- W106 FRONT FENDER WIDTH. The dimension measured between the widest points at the front wheel centerline, excluding moldings.
- W107 REAR FENDER WIDTH. The dimension measured between the widest points at the rear wheel centerline, excluding moldings.
- W117 BODY WIDTH AT SgRP—FRONT. The dimension measured laterally between the widest points on the body at the SgRP-front, excluding door handles, applied moldings, or appliques.
- W120 VEHICLE WIDTH—FRONT DOORS OPEN. The dimension measured between the widest point on the front doors in maximum hold-open position.
- W121 VEHICLE WIDTH—REAR DOORS OPEN. The dimension measured between the widest point on the rear doors in maximum hold-open position. For vehicles with a rear door on only one side, this dimension is to the zero "Y" plane.
- W122 TUMBLE—HOME. STRAIGHT SIDE GLASS. The angle measured from a vertical to the outside surface of the front door glass at the SgRP "X" plane.
CURVED SIDE GLASS. The angle measured from a vertical to a chord extending from the upper DLO to the lower DLO at the outside surface of the front door glass at the front SgRP "X" plane.

Length Dimensions

- L101 WHEELBASE (WB). The dimension measured longitudinally between front and rear wheel centerlines. In case of dual rear axles, the dimension shall be to the midpoint of the centerlines of the rear wheels.
- L103 VEHICLE LENGTH. The maximum dimension measured longitudinally between the foremost point and the rearmost point on the vehicle, including bumper, bumper guards, tow hooks and/or rub strips, if standard equipment.
- L104 OVERHANG—FRONT. The dimension measured longitudinally from the centerline of the front wheels to the foremost point on the vehicle including bumper, bumper guards, tow hooks and/or rub strips, if standard equipment.
- L105 OVERHANG—REAR. The dimension measured longitudinally from the centerline of the rear wheels; or in the case of

dual rear axles, the dimension shall be the midpoint of the centerlines of the rear wheels, to the rearmost point on the vehicle including rear bumpers, bumper guards, tow hooks and rub strips, if standard equipment.

- L123 UPPER STRUCTURE LENGTH. The dimension measured longitudinally from the cowl point to the deck point.
- L125 COWL POINT "X" COORDINATE.
- L126 FRONT END LENGTH. The dimension measured longitudinally from the cowl point to the foremost point on the vehicle at the zero "Y" plane excluding ornamentation or bumpers. In cases where bumpers and/or grills are integrated with the profile, measurement is made at the foremost point of front end contour.
- L127 REAR WHEEL CENTERLINE "X" COORDINATE or in the case of dual rear axles, the coordinate shall be the midpoint of the distance between the rear axle centerlines.
- L129 REAR END LENGTH. The dimension measured longitudinally from the deck point to the rearmost visible point of the body sheet metal at the zero "Y" plane, excluding ornamentation or bumpers.

Height Dimensions

- H101 VEHICLE HEIGHT. The dimension measured vertically from the highest point on the vehicle body to ground.
- H111 ROCKER PANEL—REAR TO GROUND. The dimension measured vertically from the bottom of the rocker or side quarter panel at the front of the rear wheel opening, excluding flanges, to ground.
- H112 ROCKER PANEL—FRONT TO GROUND. The dimension measured vertically from the foremost point on the bottom of the rocker panels, excluding flanges, to ground.
- H114 COWL POINT TO GROUND. Measured at zero "Y" plane.
- H121 BACKLIGHT SLOPE ANGLE. The angle between the vertical reference line and the surface of backlight at vehicle zero "Y" plane. For curve backlight, the angle is to chord of backlight arc from lower DLO to upper DLO.
- H122 WINDSHIELD SLOPE ANGLE. The angle between the vertical reference line and a chord of the windshield arc running from the lower DLO to the upper DLO at the vehicle zero "Y" plane. In the case of wrap over glass, the angle to be measured will be formed by a chord 457 mm (18.0 in) long drawn from the lower DLO to the intersecting point on the windshield.
- H127 HEADLAMP TO GROUND—CURB MASS (WT.). The dimension measured vertically from the centerline of the lowest headlamp lens to ground.
- H128 TAILLAMP TO GROUND—CURB MASS (WT.). The dimension measured vertically from the centerline of the upper bulb to ground.
- H133 BOTTOM OF DOOR CLOSED—FRONT TO GROUND. The dimension measured vertically from the bottom outside corner of the door on the lock pillar side, in maximum closed position, to ground.
- H135 BOTTOM OF DOOR CLOSED—REAR TO GROUND. The dimension measured vertically from the bottom outside corner of the door on the lock pillar side, in maximum closed position, to ground.
- H138 DECK POINT TO GROUND. Measured at zero "Y" plane.

Ground Clearance Dimensions

- H102 FRONT BUMPER TO GROUND. The minimum dimension measured vertically from the lowest point on the front bumper to ground, including bumper guards, if standard equipment.
- H103 FRONT BUMPER TO GROUND—CURB MASS (WT.). Measured in the same manner as H102.

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Interior Car And Body Dimensions - Key Sheet

Dimensions Definitions

- H104 REAR BUMPER TO GROUND. The minimum dimension measured vertically from the lowest point on the rear bumper to ground, including bumper guards, if standard equipment.
- H105 REAR BUMPER TO GROUND - CURB MASS (WT.). Measured in the same manner as H104.
- H106 ANGLE OF APPROACH. The angle measured between a line tangent to the front tire static loaded radius arc and the initial point of structural interference forward of the front tire to ground. The limiting structural component shall be designated.
- H107 ANGLE OF DEPARTURE. The angle measured between a line tangent to the rear tire static loaded radius arc and the initial point of structural interference rearward of the rear tire to ground. The limiting component shall be designated.
- H147 RAMP BREAKOVER ANGLE. The angle measured between two lines tangent to the front and rear tire static loaded radius and intersecting at a point on the underside of the vehicle which defines the largest ramp over which the vehicle can roll.
- H153 REAR AXLE DIFFERENTIAL TO GROUND. The minimum dimension measured from the rear axle differential to ground.
- H156 MINIMUM RUNNING GROUND CLEARANCE. The minimum dimension measured from the sprung vehicle to ground. Specify location.

Glass Areas

- S1 Windshield area.
- S2 Side windows area. Includes the front door, rear door, vents, and rear quarter windows on both sides of the vehicle.
- S3 Backlight areas.
- S4 Total area. Total of all areas (S1 + S2 + S3).

Fiducial Mark Dimensions

Fiducial Mark - Number 1

- L54 "X" coordinate.
- W21 "Y" coordinate.
- H81 "Z" coordinate.
- H161 Height "Z" coordinate to ground at curb weight.
- H163 Height "Z" coordinate to ground.

Fiducial Mark - Number 2

- L55 "X" coordinate.
- W22 "Y" coordinate.
- W82 "Z" coordinate.
- H162 Height "Z" coordinate to ground at curb weight.
- H164 Height "Z" coordinate to ground.

Front Compartment Dimensions

- L7 STEERING WHEEL TORSO CLEARANCE. The minimum dimension measured in the side view from the rearmost edge of the steering wheel, with front wheels in the straight ahead position, to the torso line.
- L11 ACCELERATOR HEEL POINT TO STEERING WHEEL CENTER. The dimension measured horizontally from the AHP to the intersection of the steering column centerline and a plane tangent to the upper surface of the steering wheel rim.
- L17 DESIGN H-POINT-FRONT TRAVEL. The dimension measured horizontally between the design H-point-front in the foremost and rearmost seat track positions.
- L23 NORMAL DRIVING AND RIDING SEAT TRACK LEVEL. The dimension measured horizontally between a point on the design H-point travel line from the SgRP to the displaced point on the design H-point travel line with the seat moved to the foremost seat position, but not to include seat track travel used for purposes other than normal driving and riding positions.
- L31 SgRP-FRONT. "X" COORDINATED.

- L34 MAXIMUM EFFECTIVE LEG ROOM-ACCELERATOR. The dimension measured along a line from the ankle pivot center to the SgRP-front plus 254 mm (10.0 in) measured with right foot on the undepressed accelerator pedal. For vehicles with SgRP to heel (H30) greater than 18 in., the accelerator pedal may be depressed as specified by the manufacturer. If the accelerator is depressed, the manufacturer shall place foot flat on pedal and note the depression of the pedal.
- L40 BACK ANGLE-FRONT. The angle measured between a vertical line through the SgRP-front and the torso line. If the seatback is adjustable, use the normal driving and riding position specified by the manufacturer.
- L42 HIP ANGLE-FRONT. The angle measured between torso line and thigh centerline.
- L44 KNEE ANGLE-FRONT. The angle measured between thigh centerline and lower leg centerline measured on the right leg.
- L46 FOOT ANGLE-FRONT. The angle measured between the lower leg centerline and a line tangent to the ball and heel of the bare foot flesh line measured on the right leg. Ref SAE J826.
- L53 SgRP-FRONT TO HEEL. The dimension measured horizontally from the SgRP-front to the accelerator heel point.
- W3 SHOULDER ROOM-FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the SgRP-front at height between the belt line and 254 mm (10.0 in.) above the SgRP-front, excluding the door assist strap and attaching parts.
- W5 HIP ROOM-FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the SgRP-front within 25 mm (1.0 in.) below and 76 mm (3.0 in.) above the SgRP-front and 76 mm (3.0 in.) fore and aft of the SgRP-front.
- W9 STEERING WHEEL MAXIMUM OUTSIDE DIAMETER. Define if other than round.
- H13 STEERING WHEEL TO CENTERLINE OF THIGH. The minimum dimension measured from the bottom of steering wheel, with front wheels in the straight position, to the thigh centerline.
- H17 ACCELERATOR HEEL POINT TO THE STEERING WHEEL CENTER. The dimension measured vertically from the AHP-front to the intersection of the steering column centerline to a plane tangent to the upper surface of the steering wheel rim.
- H18 STEERING WHEEL ANGLE. The angle measured from a vertical to the surface plane of the steering wheel.
- H30 SgRP-FRONT TO HEEL. The dimension measured vertically from the SgRP-front to the accelerator heel point.
- H37 HEADLINING TO ROOF PANEL-FRONT. The dimension measured from the intersection of the headlining and the extended effective head room line normal to the sheet metal.
- H50 UPPER BODY OPENING TO GROUND-FRONT. The dimension measured vertically from the trimmed body opening to the ground on the SgRP-front "X" plane.
- H61 EFFECTIVE HEAD ROOM-FRONT. The dimension measured along a line 8 deg. rear of vertical from the SgRP-front to the headlining plus 102 mm (4.0 in.).
- H67 FLOOR COVERING THICKNESS-UNDEPRESSED-FRONT. The dimension measured vertically from the surface of the undepressed floor covering to the underbody sheet metal at the accelerator heel point.
- PD1 PASSENGER DISTRIBUTION-FRONT.

Rear Compartment Dimensions

- L3 COMPARTMENT ROOM-SECOND. The dimension measured horizontally from the back of front seat to the front of the second seatback at a height tangent to the top of the second seat cushion.

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Interior Car And Body Dimensions – Key Sheet

Dimensions Definitions

- L41 **BACK ANGLE-SECOND.** The angle measured between a vertical line through the SgRP – second and the torso line.
- L43 **HIP ANGLE-SECOND.** The angle measured between torso line and thigh centerline.
- L45 **KNEE ANGLE-SECOND.** The angle measured between thigh centerline and lower leg centerline.
- L47 **FOOT ANGLE-SECOND.** The angle measured between the lower leg centerline and a line tangent to the ball and heel of the three-dimensional devices bare foot flesh line (Reference J826).
- L48 **KNEE CLEARANCE-SECOND.** The minimum dimension measured from the knee pivot center to the back of front seatback minus 51 mm (2.0 in.).
- L50 **SgRP COUPLE DISTANCE-SECOND.** The dimension measured horizontally from the driver SgRP–front to the SgRP–second.
- L51 **MINIMUM EFFECTIVE LEG ROOM-SECOND.** The dimension measured along a line from the ankle pivot center to the SgRP–second plus 254mm (10.0 in.).
- W4 **SHOULDER ROOM-SECOND.** The minimum dimension measured laterally between door or quarter trimmed surfaces on the "X" plane through the SgRP–second at height between 254-406 mm (10.0-16.0 in.) above the SgRP–second, excluding the door assist straps and attaching parts.
- W6 **HIP ROOM-SECOND.** Measured in the same manner as W5.
- H31 **SgRP-SECOND TO HEEL.** The dimension measured vertically from the SgRP–second to the two dimensional device heel point on the depressed floor covering.
- H38 **HEADLINING TO ROOF PANEL-SECOND.** The dimension measured from the intersection of the headlining and the extended effective head room line normally to the roof sheet metal.
- H51 **UPPER BODY OPENING TO GROUND-SECOND.** The dimension measured vertically from the trimmed body opening to the ground on the "X" plane 330 mm (13.0 in) forward of the SgRP–second.
- H63 **EFFECTIVE HEAD ROOM-SECOND.** The dimension measured along a line 8 deg rear of vertical from the SgRP to the headlining, plus 102 mm (4.0 in).
- H73 **FLOOR COVERING-DEPRESSED-SECOND.** The dimension measured vertically from the heel point to the underbody sheet metal.
- PD2 **PASSENGER DISTRIBUTION-SECOND.**

Luggage Compartment Dimensions

- V1 **USABLE LUGGAGE CAPACITY-Total** of volumes of individual pieces of standard luggage set plus H-boxes stowed in the luggage compartment in accordance with the procedure described in paragraph 8.2 of SAE-J1100.
- H195 **LIFTOVER HEIGHT.** The dimension measured vertically from the luggage compartment lower opening at the zero "Y" plane to ground.

Interior Volumes (EPA Classification)

The Interior Volume Index is listed for each body style except two seaters. The interior volume index estimates the space in a car. It is based on four measurements – head room, shoulder room, hip room, and leg room – for the front and rear seats, plus trunk capacity. The interior volume index is an estimate of the size of the passenger compartment.

The Trunk/Cargo Index is an estimate of the size of the trunk/cargo space. In station wagons and hatchbacks it is an estimate of the space behind the second seat.

Station Wagon – Third Seat Dimensions

- L85 **SgRP COUPLE DISTANCE-THIRD.** The dimension measured horizontally from the SgRP–second to the SgRP–third.
- L86 **EFFECTIVE LEG ROOM-THIRD.** The dimension measured along a line from the ankle pivot center to the SgRP–third plus 254 mm (10.0 in).
- L87 **KNEE CLEARANCE-THIRD.** The minimum dimension from the knee pivot center to the back of second seatback minus a constant of 51 mm (2.0 in). With rear-facing third seat, dimension is measured to closure.
- L88 **BACK ANGLE-THIRD.** Measured in the same manner as L41.
- L89 **HIP ANGLE-THIRD.** Measured in the same manner as L43.
- L90 **KNEE ANGLE-THIRD.** Measured in the same manner as L45.
- L91 **FOOT ANGLE-THIRD.** Measured in the same manner as L47.
- W85 **SHOULDER ROOM-THIRD.** Measured in the same manner as W4.
- W86 **HIP ROOM-THIRD.** Measured in the same manner as W5.
- H86 **EFFECTIVE HEAD ROOM-THIRD.** The dimension, measured along a line 8 deg. rear from the SgRP–third to the headlining rear of vertical plus a constant of 102 mm (4.0 in.).
- PD3 **PASSENGER DISTRIBUTION-THIRD.**
- SD1 **SEAT FACING DIRECTION-THIRD.**

Station Wagon – Cargo Space Dimensions

- L200 **CARGO LENGTH-OPEN-FRONT.** The minimum dimension measured longitudinally from the back of the front seatback at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the open tailgate or cargo surface if the rear closure is a conventional door type tailgate at the zero "Y" plane.
- L201 **CARGO LENGTH-OPEN-SECOND.** The dimension measured longitudinally from the back of the second seatback at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the open tailgate or cargo floor surface if the rear closure is a conventional door type tailgate, at the zero "Y" plane.
- L202 **CARGO LENGTH-CLOSED-FRONT.** The minimum dimension measured horizontally from the back of the front seat at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the closed tailgate or taildoor for station wagons, trucks and mpv's at the zero "Y" plane.
- L203 **CARGO LENGTH-CLOSED-SECOND.** The dimension measured horizontally from the back of the second seat at the height of the undepressed floor covering to the rearmost point on the undepressed floor covering on the closed tailgate or taildoor for station wagons, trucks and mpv's at the zero "Y" plane.
- L204 **CARGO LENGTH AT BELT-FRONT.** The minimum dimension measured horizontally from the back of the front seatback at the seatback top to the foremost normal surface of the closed tailgate or inside surface of the cab backpanel at the height of the belt, on the zero "Y" plane.
- L205 **CARGO LENGTH AT BELT-SECOND.** The minimum dimension measured horizontally from the back of the second seatback at the seatback top to the foremost normal surface of the closed tailgate at the height of the belt, on the zero "Y" plane.
- W201 **CARGO WIDTH-WHEELHOUSE.** The minimum dimension measured laterally between the trimmed wheelhouings at floor level. For any vehicle not trimmed, measure to the sheet metal.

MVMA Specifications Form Passenger Car

METRIC (U.S. Customary)

Interior Car And Body Dimensions - Key Sheet Dimensions Definitions

- W203 REAR OPENING WIDTH AT FLOOR.** The minimum dimension measured laterally between the limiting interferences of the rear opening at floor level.
- W204 REAR OPENING WIDTH AT BELT.** The minimum dimension measured laterally between the limiting interferences of the rear opening at belt height or top of pick up box.
- W205 REAR OPENING WIDTH ABOVE BELT.** The minimum dimension measured laterally between the limiting interferences of the rear opening above the belt height.
- H197 FRONT SEATBACK TO LOAD FLOOR HEIGHT.** The dimension measured vertically from the horizontal tangent to the top of the seatback to the undepressed floor covering.
- H201 CARGO HEIGHT.** The dimension measured vertically from the top of the undepressed floor covering to the headlining at the rear wheel "X" coordinate on the zero "Y" plane.
- H202 REAR OPENING HEIGHT.** The dimension measured vertically from the top of the undepressed floor covering to the upper trimmed opening on the zero "Y" plane with rear door fully open.
- H250 TAILGATE TO GROUND CURB MASS (WT.).** The dimension measured vertically from the top of the undepressed floor covering on the lowered tailgate to ground on the zero "Y" plane.
- V2 STATION WAGON**
Measured in inches:
$$\frac{W4 \times H201 \times L204}{1728} = \text{ft}^3$$

Measured in mm:
$$\frac{W4 \times H201 \times L204}{10^9} = \text{m}^3 \text{ (cubic meter)}$$
- V4 HIDDEN LUGGAGE CAPACITY-REAR OF FRONT SEAT.** The total volumes of individual pieces of one set of standard luggage stowed in any hidden cargo area below the load floor rear of the front seat.
- V5 TRUCKS AND MPV'S WITH OPEN AREA.**
Measured in inches:
$$\frac{L506 \times W500 \times H503}{1728} = \text{ft}^3$$

Measured in mm:
$$\frac{L506 \times W500 \times H503}{10^9} = \text{m}^3 \text{ (cubic meter)}$$
- V6 TRUCKS AND MPV'S WITH CLOSED AREA.**
Measured in inches:
$$\frac{L204 \times W500 \times H505}{1728} = \text{ft}^3$$

Measured in mm:
$$\frac{L204 \times W500 \times H505}{10^9} = \text{m}^3 \text{ (cubic meter)}$$
- V8 HIDDEN LUGGAGE CAPACITY-REAR OF SECOND SEAT.** The total volume of individual pieces of one set of standard luggage stowed in any hidden cargo area below the load floor rear of the second seat.
- V10 STATION WAGON CARGO VOLUME INDEX.**
Measured in inches:
$$\frac{H201 \times L205 \times \frac{W4 + W201}{2}}{1728} = \text{ft}^3$$

Measured in mm:
$$\frac{H201 \times L205 \times \frac{W4 + W201}{2}}{10^9} = \text{m}^3 \text{ (cubic meter)}$$

Hatchback - Cargo Space Dimensions

All hatchback cargo dimensions are to be taken with the front seat in full down and rear position, and the rear seat folded down. The hatchback door is in the closed position. (For electrically adjusted seats, see the manufacturer's specifications for Design "H" Point).

- L208 CARGO LENGTH AT FRONT SEATBACK HEIGHT.** The minimum horizontal dimension from the "X" plane tangent to the rearmost surface of the driver's seatback to the inside limiting interference of the hatchback door on the vehicle zero "Y" plane.
- L209 CARGO LENGTH AT FLOOR-FRONT-HATCHBACK.** The minimum horizontal dimension measured at floor level from the rear of the front seatback to the normal limiting interference of the hatchback door on the vehicle zero "Y" plane.
- L210 CARGO LENGTH AT SECOND SEATBACK HEIGHT-HATCHBACK.** The minimum dimension measured from the "X" plane tangent to the rearmost surface of second seatback or the load floor which is stowed at least one half of the H198 dimension height above the rear load floor, to the rearmost inside limiting interference on the zero "Y" plane.
- L211 CARGO LENGTH AT FLOOR-SECOND HATCHBACK.** The minimum horizontal dimension measured at floor level from the rear of the second seatback or load floor panel to the normal limiting interference of the hatchback door on the vehicle zero "Y" plane.
- H197 FRONT SEATBACK TO LOAD HEIGHT.** The dimension measured vertically from the horizontal tangent to the top of the seatback to the undepressed floor covering.
- H198 SECOND SEATBACK TO LOAD FLOOR HEIGHT:** The dimension measured vertically from the second seat back to the undepressed floor covering.
- V3 HATCHBACK.**
Measured in inches:
$$\frac{L208 + L209}{2} \times W4 \times H197 = \text{ft}^3$$

Measured in mm:
$$\frac{L208 + L209}{2} \times W4 \times H197 = \text{m}^3 \text{ (cubic meter)}$$
- V4 HIDDEN LUGGAGE CAPACITY-REAR OF FRONT SEAT.** The total volumes of individual pieces of one set of standard luggage stowed in any hidden cargo area below the load floor rear of the front seat.
- V11 HATCHBACK CARGO VOLUME INDEX.** Usable luggage (one (1) stand and luggage set) below floor:
Measured in inches:
$$\frac{L210 + L211}{2} \times W4 \times H198 = \text{ft}^3$$

Measured in mm:
$$\frac{L210 + L211}{2} \times W4 \times H198 = \text{m}^3 \text{ (cubic meter)}$$

MVMA Specifications Form

Passenger Car

METRIC (U.S. Customary)

Index

Subject	Page No.	Subject	Page No.
Aerodynamics	22	Interior Volumes	21
Alternator	16	Instruments	15
Automatic Transmission/Transaxle	8, 9	Lamps and Headlamp Shape	24
Axis, Steering	14	Legroom	21, 22
Axle, Drive, Front, Rear	2, 9, 10	Lengths - Car and Body	20
Axle Shafts	10	Leveling, Suspension	11
Battery	16	Lifters, Valve	4
Body and Miscellaneous Information	17	Linings - Clutch, Brake	8, 12
Brakes-Parking, Service	12, 13	Lubrication - Engine Transmission/Transaxle	4, 8, 9
Camber	15	Luggage Compartment	21
Camshaft	3	Mass	25, 26
Capacities		Models	1
Cooling System	5	Motor Starting	16
Fuel Tank	6	Muffler	7
Lubricants		Passenger Capacity	1
Engine Crankcase	4	Passenger Mass Distribution	25
Transmission/Transaxle	8, 9	Pistons	3
Rear Axle	10	Power Brakes	12
Car Models	1	Power, Engine	2
Car and Body Dimensions		Power Steering	14
Width	20	Power Teams	2
Length	20	Propeller Shaft, Universal Joints	10
Height	20	Pumps - Fuel	6
Ground Clearance	20	Water	5
Front Compartment	21	Radiator - Cap, Hoses, Core	5
Rear Compartment	21	Ratios - Axle, Transaxle	2, 9
Luggage Compartment	21	Compression	2
Station Wagon - Third Seat	22	Steering	14
Station Wagon - Cargo Space	22	Transmission/Transaxle	2, 8, 9
Hatchback - Cargo Space	22	Rear Axle	2, 9, 10
Carburetor	2, 6	Regulator - Generator	16
Caster	15	Restraint System	18
Choke, Automatic	6	Rims	13
Clutch - Pedal Operated	8	Rods - Connecting	4
Coil, Ignition	16	Scrub Radius	14
Connecting Rods	4	Seats	17
Convenience Equipment	19	Shock Absorbers, Front & Rear	11
Cooling System	5	Spark Plugs	16
Crankshaft	4	Speedometer	15
Cylinders and Cylinder Head	3	Springs - Front & Rear Suspension	11
Diesel Information	4	Stabilizer (Sway Bar) - Front & Rear	11
Dimension Definitions		Starting System	16
Key Sheet - Exterior	27, 30, 31	Steering	14
Key Sheet - Interior	28, 29, 31, 32, 33	Suppression - Ignition, Radio	16
Electrical System	15, 15	Suspension - Front & Rear	11
Emission Controls	7	Tail Pipe	7
Engine-General		Theft Protection	19
Bore, Stroke, Type	3	Thermostat, Cooling	5
Compression Ratio	2	Tires	13
Displacement	2, 3	Toe-in	15
Firing Order, Cylinder Numbering	3	Torque Converter	9
General Information, Power & Torque	2	Torque - Engine	2, 8, 9
Intake System	4	Transaxle	8
Power Teams	2	Transmission - Types	2, 8, 9
Exhaust System	7	Transmission - Automatic	2, 8, 9
Equipment Availability, Convenience	19	Transmission - Manual	2, 8, 9
Fan, Cooling	5	Transmission - Ratios	2, 9
Fiducial Marks	23	Tread	20
Filters - Engine Oil, Fuel System	4	Trunk Cargo Load	1
Frame	17	Trunk Luggage Capacity	21
Front Suspension	11	Turning Diameter	14
Front Wheel Drive Unit	10	Unitized Construction	17
Fuel System	6	Universal Joints, Propeller Shaft	10
Fuel Injection	6	Valve System	4
Fuel Tank	6	Voltage Regulator	16
Generator and Regulator	16	Water Pump	5
Glass	18	Weights	25, 26
Headroom - Body	21, 22	Wheel Alignment	15
Heights - Car and Body	20	Wheelbase	20
Horns	15	Wheels & Tires	12
Horsepower - Brake	2	Wheel Spindle	14
Ignition System	16	Widths - Car and Body	20
Inflation - Tires	13	Windshield	18
		Windshield Wiper and Washer	15