





CONTENTS

	<u>Page</u>
MODELS	2
SEATING ARRANGEMENTS	4
STANDARD TRIM	5
BEAUVILLE TRIM	6
POWERTRAINS	7
STANDARD SUSPENSION	10
OPTIONAL SUSPENSION	11
WHEELS AND TIRES	12
STEERING/BRAKES	13
ELECTRICAL	14
COOLING	16
DIMENSIONS	17
OPTIONS	19
COLOR COMBINATIONS	21
EXTERIOR COLORS	B
INTERIOR TRIM	C
SEATS	D
TRAILERING	E

KEY: Red Print Indicates Not Available in California

PASSENGER VAN

MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP.	STD ENGINE/ TRANS	OPT ENGINE/ TRANS	
G10 SPORTVAN (110-IN. WB)							
	CG11006/ ZW9 ²	110	5600	1451	5	4.3L V6/A4	5.0L V8/A4
	CG11006/ ZW9 ²	110	6000	1851	5	4.3L V6/A4	5.0L V8/A4
G10 SPORTVAN (125-IN. WB)							
	CG11306/ ZW9 ²	125	5600	1129	5	4.3L V6/A4	—
	CG11306/ ZW9 ³	125	6000	1529	5	4.3L V6/A4	5.0L V8/A4 5.7L V8/A4
G10 BEAUVILLE (125-IN. WB)							
	CG11306/ E94 ²	125	5600	1118	5	4.3LV6/A4	—
	CG11306/ E94 ³	125	6000	1518	5	4.3L V6/A4	5.0L V8/A4 5.7L V8/A4
G20 SPORTVAN (125-IN. WB)							
	CG21306/ ZW9	125	6600	2129	5/8	4.3L V6/A4	5.0L V8/A4 5.7L V8/A4
	CG21306/ ZW9/B3J ⁵	125	6850	2379	5/8	6.2L V8/A4	—
G20 BEAUVILLE (125-IN. WB)							
	CG21306/ E94	125	6600	2118	5/8	4.3L V6/A4	5.0L V8/A4 5.7L V8/A4
	CG21306/ E94/B3J ⁵	125	6850	1922	5/8	6.2L V8/A4	—
G30 SPORTVAN (125-IN. WB)							
	CG31306/ ZW9	125	7400	2382	12	5.7L V8/A4	—

G10 SPORTVAN (110-IN. WHEELBASE)
The G10 Sportvan 110-in wheelbase is the base full-size passenger van model and the only 110-in. wheelbase model in the Sportvan line. A variety of GVWR's and powertrains are offered.

G10 SPORTVAN (125-IN. WHEELBASE)
The G10 Sportvan 125-in. wheelbase model offers increased cargo length and volume when compared to the 110-in wheelbase G10 model.

G10 BEAUVILLE
The G10 Beauville offers additional trim, comfort and convenience features when compared to the G10 Sportvan models.

G20 SPORTVAN
The G20 Sportvan offers increased GVWR capacity when compared to the G10 Sportvan models.

G20 BEAUVILLE
The G20 Sportvan offers additional trim, comfort and convenience features when compared to the G20 Sportvan models.

G30 SPORTVAN
The G30 Sportvan offers standard seating for 12 passengers and increased GVWR's when compared to the G10 and G20 models.

¹Based on Curb Weight. ²Requires YCE tires. ³w/YCU/YCV or YCW tires; N/A YCE tires. ⁴NA YCE tires. ⁵Requires YFL tires.

MODELS

1991

SPORTVAN


Key: — Indicates Not Available in California

PASSENGER VAN

G30 BEAUVILLE

The G30 Beauville offers additional trim, comfort and convenience features when compared to the G30 Sportvan models.

G30 BEAUVILLE (125-IN. WB)




MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP.	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CG31306/E94	125	7400	2381	12	5.7L V8/A4	—

G30 HEAVY-DUTY SPORTVAN

The G30 Heavy-Duty Beauville (C6P) offers an increased GVWR when compared to the regular G30 models.

G30 HEAVY-DUTY SPORTVAN (125 IN. WB)




MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CG31306/ZW9/(C6P)	125	8600	3582	5/8/12	5.7L V8/A4	7.4L V8/A4
CG31306/ZW9/B3J(C6P)	125	8600	3289	5/8/12	6.2L V8/A4	—

G30 HEAVY-DUTY BEAUVILLE

The G30 Heavy-Duty Beauville (C6P) offers additional trim, comfort and convenience features when compared to the G30 Sportvan models.

G30 HEAVY-DUTY BEAUVILLE (125-IN. WB)




MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CG31306/E94/(C6P)	125	8600	3582	5/8/12	5.7L V8/A4	7.4L V8/A4
CG31306/E94/B3J(C6P)	125	8600	3289	5/8/12	6.2L V8/A4	—

G30 EXTENDED VAN SPORTVAN

The G30 Extended Van Sportvan is 21 inches longer than the other G30 models, and offers standard 12-passenger seating with an optional 15-passenger seating capacity.

G30 EXTENDED SPORTVAN (146-IN. WB)




MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CG31606/ZW9/(C6P)	146	8600	3073	12/15	5.7L V8/A4	7.4L V8/A4

G30 EXTENDED VAN BEAUVILLE

The G30 Extended Van Beauville offers additional trim, comfort and convenience features when compared to the G30 Standard Extended Van Sportvan.

G30 EXTENDED BEAUVILLE (146-IN. WB)



MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CG31606/E94/(C6P)	146	8600	3073	12/15	5.7L V8/A4	7.4L V8/A4


*Based on Curb Weight.

SEATING ARRANGEMENTS

5-PASSENGER SEATING:
Standard on all G10, G20 models and CG31306 models with C6P.



5-PASSENGER SEATING WITH TRAVEL BED REPLACING REAR SEAT (B6S):
Optional on CG11306, CG21306 models and CG31306 models with C6P.

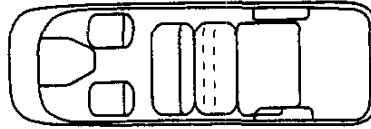

8-PASSENGER SEATING (AQ3):
Optional on CG21306 and on CG31306 models with C6P.



8-PASSENGER SEATING WITH TRAVEL BED REPLACING REAR SEAT (B6S/AQ3):
Optional on G20 and CG31306 models with C6P.



12-PASSENGER SEATING (AQ4):
Standard on G30 models without C6P; Optional on CG31306 models with C6P.



12-PASSENGER SEATING:
Standard on CG31606 Extended models.





15-PASSENGER SEATING (ZP3):
Optional on CG31606 Extended models.



SIDE DOOR APPLICATIONS

STANDARD: CHOICE OF STANDARD SWING-OUT SIDE DOORS (E24) OR SLIDING SIDE DOOR (YA2)

All Sportvan models are offered with a choice of standard swing-out side doors (E24) or a sliding side door (YA2) (available at no extra cost).

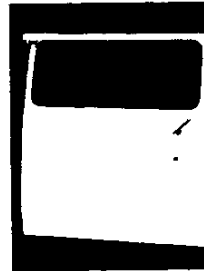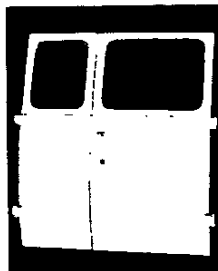

STANDARD

The Standard trim level of the Sportvan series is designed to offer buyers a high level of standard features when purchasing a standard-level van.

The following features are standard.



Some equipment shown may be optional or extra cost.

POWERTRAIN/CHASSIS

- ALTERNATOR: 85 Amp (gasoline engine) or 100 Amp (diesel engine).
- BATTERY: Gas engines—12 volt, neg. ground; 630 CCA @ 0 deg. F. Diesel engines—Two 12 volt, neg. ground; 540 CCA @ 0 deg. F.
- BRAKES: Power; vacuum, (gasoline models). Front—disc. Rear—drum. Power; hydraulic, (diesel models). Front—disc. Rear—drum. Includes rear-wheel anti-lock system.
- ENGINE: 4.3-liter V6 EFI on G10 and G20 series. 150 net HP @ 4000 rpm and 230-lb. ft. of net torque @ 2400 rpm.

- 5.7-liter V8 EFI on G30 series. 195 net HP @ 4000 rpm and 290-lb. ft. of net torque @ 2400 rpm at 7400-lb. GVWR, and 190 net HP @ 4000 rpm and 300 lb. ft. of net torque @ 2400 rpm at 8600-lb GVWR.
- 6.2-liter V8 diesel with gear driven Mechanical Fuel Injection is available with B3J diesel equipment on certain models. (See Powertrains for details).
- EXHAUST: Single. (Dual for diesels).
- FRAME: All-welded integral body-frame construction.
- FUEL TANKS: 33-gallon (approx.) capacity. 22-gallon (approx.) capacity on CG11006 model.

- REAR AXLE: Hypoid, Semi-Floating. Ratios vary with model.
- SHOCK ABSORBERS: Front and Rear—32 mm piston dia.
- STABILIZER BAR: Front—1.06 inch dia.
- STEERING: Integral power. Ratio—17.2:1.
- SUSPENSION: Front—Independent coil spring. Rear—Semi-Elliptic Two-Stage Multi-Leaf.
- TRANSMISSION: 4-speed automatic with overdrive.

EXTERIOR

- BUMPERS: Front and rear chromed.
- COLORS: Choice of ten in a solid paint scheme. See Color and Trim Specifications for details.
- DOORS: RH and LH front side, rear load, and 60/40 hinged side-loading doors (RH sliding side-door also available at no extra cost).
- DOOR STOPS: Positive rear.

- GLASS: Includes windshield, side door, swing-out rear doors, side load doors, swing-out LH front quarter glass, and RH and LH rear quarter fixed glass.
- GRILLE: Light argent molded plastic.
- HEADLAMPS: Single rectangular halogen.
- HORN: Dual high-note and low-note.
- HUB CAPS: Bright metal with black trim.
- MIRRORS: White RH and LH below-eye-line type with adjustable head. Head size is 6.5" x 9.0".

- TIRES: Four steel-belted radials. (See Wheels and Tires for details).
- UNDERCOATING: On body rocker panels, step panels and wheelhousings.
- WHEELS: Five (including spare) white painted steel (15.0" x 6.0" on G10 and G20; 16.0" x 6.5" on G30).
- WINDOWS: Tinted glass.

INTERIOR

- ARMRESTS: Padded RH and LH side door and rear.
- ASHTRAY: Instrument panel and front bucket seat backs.
- BEVERAGE HOLDERS: Parcel tray and top surface of instrument panel extension.
- CIGARETTE LIGHTER
- COAT HOOKS: LH.
- COLORS: Choice of four. Blue, Garnet, Saddle or Gray.
- DOOR SEALS: Latex foam rubber.
- DOME LAMP: Front and rear with front door-actuated switches.
- FLOOR COVERINGS: Embossed black rubber mats over floor and front wheelhousings.
- GAGES: Include speedometer, odometer, trip odometer, fuel level, voltmeter, oil pressure, engine temperature and additional telltale lights
- HEADLINER: Full-length color-keyed with garnish moldings. Not included on CG11006.

- HEATER: Deluxe outside air and defogger with side window defoggers.
- INSULATION: Instrument panel, front floor panel, engine cover front extension and inside engine cover.
- MIRROR: 10-inch rearview.
- RADIO: Electronically-tuned AM with two 4" x 6" front dash speakers, digital clock, fixed mast antenna and reception improvements. (Refer to the Delco Electronics brochure in RPO Detail for further information).
- SEATS: Five pass. seating with front adjustable high-back buckets and removable 3-pass. bench with all-vinyl trim on G10, G20, and G30 125" WB models at 8600 GVWR. G30 w/7400-lb. GVWR feature 12-pass. seating, adding a second position middle and rear 4-pass. bench seat with all-vinyl trim. Extended Van models feature 12-pass. seating, with a 15-pass. seating option.


- SPARE TIRE/WHEEL: Full-size spare tire and wheel on G10 models. (Spare wheel only on G20 and G30 models).
- SPARE TIRE CARRIER: On RH rear side.
- STEERING WHEEL: 2-spoke black vinyl.
- SUNSHADES: Padded, color-keyed RH and LH sunshades.
- STEP PADS: Safety, on front and rear side door step panels.
- TOOLS: Includes mechanical jack and wheel wrench located at RH rear of vehicle.
- TRIM PANELS: Custom cloth on front and rear side door(s) and rear quarter panels (no trim panels on rear doors). Not included on CG11006 models.
- WINDSHIELD WIPERS: Intermittent.

BEAUVILLE

(E94)

The Beauville trim level is an optional trim level for the Sportvan series. It is designed to offer buyers a high level of comfort and convenience features compared to the Standard trim level.

The following features are standard. Bold type denotes equipment in addition to or replacing that of the Standard trim level.

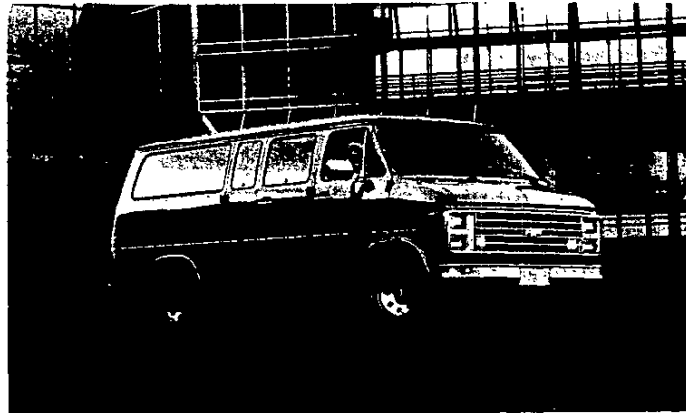

Some equipment shown may be optional or extra cost.

POWERTRAIN/CHASSIS

- ALTERNATOR: 85 Amp (gasoline engine) or 100 Amp (diesel engine).
- BATTERY: Gas engines—12 volt, neg. ground; 630 CCA @ 0 deg. F. Diesel engines—Two 12 volt, neg. ground; 540 CCA @ 0 deg. F.
- BRAKES: Power; vacuum, (gasoline models). Front—disc. Rear—drum. Power; hydraulic, (diesel models). Front—disc. Rear—drum. Includes rear wheel anti-lock brake system.
- ENGINE: 4.3-liter V6 EFI on G10 and G20 series. 150 net HP @ 4000 rpm and 230-lb. ft. of net torque @ 2400 rpm. 5.7-liter V8 EFI on

- G30 series. 195 net HP @ 4000 rpm and 230-lb. ft. of net torque @ 2400 rpm with 7400-lb. GVWR, and 190 net HP @ 4000 rpm and 300-lb. ft. of net torque @ 2400 rpm on 8600-lb. GVWR. 6.2-liter V8 diesel is available with B3J diesel equipment on certain models (See Powertrains for details).
- EXHAUST: Single. (Dual for diesel models).
- FRAME: All-welded integral body-frame construction.
- FUEL TANKS: 33-gallon (approx.) capacity. 22-gallon (approx.) capacity on CG11006.

- REAR AXLE: Hypoid, Semi-Floating. Ratios vary with model.
- SHOCK ABSORBERS: Front and Rear—32 mm piston dia.
- STABILIZER BAR: Front—1.06 inch dia.
- STEERING: Integral power. Ratio—17.2:1.
- SUSPENSION: Front—Independent coil spring. Rear—Semi-Elliptic Two-Stage Multi-Leaf.
- TRANSMISSION: 4-speed automatic with overdrive.

EXTERIOR

- BUMPERS: Front and rear chromed.
- COLORS: Choice of ten in a solid paint scheme. See Color and Trim Specifications for details.
- DOORS: RH and LH front side, rear load doors, 60/40 hinged side-loading doors (RH sliding side-door also available at no extra cost).
- DOOR STOPS: Positive rear.
- GLASS: Includes windshield, side door, swing-out rear doors, side load doors, swing-out LH

- front quarter glass, and RH and LH rear quarter fixed glass.
- GRILLE: Light argent molded plastic with a bright Chevrolet emblem and center bar moldings with body color filler panel.
- HEADLAMPS: Dual rectangular including halogen hi-beam.
- HORN: Dual high-note and low-note.
- HUB CAPS: Bright metal with black trim.
- MIRRORS: White RH and LH below-eye-line with adjustable head. Head size is 6.5" x 9.0".

- MOLDINGS: Bright body side with black trim and bright wheel opening.
- NAMEPLATE: Beauville nameplate.
- TIRES: Four steel-belted radials. (See Wheels and Tires for details).
- UNDERCOATING: On body rocker panels, step panels and wheelhousings.
- WHEELS: Five (including spare) white steel (15.0" x 6.0" on G10 and G20; 16.0" x 6.5" on G30 models).
- WINDOWS: Tinted glass.

INTERIOR

- ARMRESTS: Padded RH and LH side door and rear.
- ASHTRAY: Instrument panel and front bucket seat backs.
- BEVERAGE HOLDERS: Parcel tray and top surface of instrument panel extension.
- CIGARETTE LIGHTER.
- COAT HOOKS: LH and rear.
- COLORS: Choice of four. Blue, Garnet, Saddle or Gray.
- DOOR SEALS: Latex foam rubber.
- DOME LAMP: Front and rear with front door-actuated switches.
- FLOOR COVERINGS: Color-keyed carpeting over floor.
- FLOOR MATS: Color-keyed front and rear.
- GAGES: Include speedometer, odometer, trip odometer, fuel level, voltmeter, oil pressure, engine temperature and additional telltale lights.
- HEADLINER: Full length cloth with garnish moldings.
- HEATER: Deluxe outside air and defogger with side window defoggers.

- INSTRUMENT PANEL: Deluxe instrument panel with brushed finish applique.
- INSULATION: Instrument panel, front floor panel, engine cover front extension and inside engine cover. Also, above headliner and on wheelhousing.
- MIRROR: 10-inch rearview.
- RADIO: Electronically-tuned AM with two 4" x 6" speakers located in front dash, digital clock, fixed mast antenna and reception improvements. (Refer to the Delco Electronics brochure in RPO Detail for further information).
- SEATS: Five pass. seating with front adjustable high-back buckets and a removable 3-pass. bench with vinyl trim standard on all G10, G20, models and G30 125" & 146" WB models. G30 w/7400-lb. GVWR feature 12-pass. seating, adding a second position middle and rear 4-pass. bench with vinyl trim. 146" WB feature 12-pass. seating, with a 15-pass. option. Choice of a Custom Vinyl or Custom Cloth trim on all models except CG11006.

- SPARE TIRE/WHEEL: Full-size on G10 models. (Spare wheel only on G20 and G30 series).
- SPARE TIRE CARRIER: On RH rear side.
- STEERING WHEEL: Sport.
- STEPWELL MATS: Embossed, black rubber for top surface of front and rear door stepwells.
- STEP PADS: Safety, on front and rear side door step panels.
- STORAGE COMPARTMENT: Locking, under front passenger seat.
- SUNSHADES: Padded, color-keyed RH and LH. RH visor with mirror also included.
- TOOLS: Includes mechanical jack and wheel wrench located at RH rear of vehicle.
- TRIM PANELS: Door trim panels are embossed, color-keyed vinyl on door and sidewalls coordinated with seat trim and carpeting on lower areas. Also, color-keyed plastic trim panels to conceal seat risers.
- WINDSHIELD WIPERS: Intermittent.

POWERTRAINS

199
SPORTVAN








KEY: S Standard O Optional
 — Not Offered **Rec** Not available w/ California Emissions
Bold Not available w/ High Altitude Emissions

MODEL	ENGINE	TRANSMISSION	AXLES					GVWR
			ECONOMY		POWER			
			3.08	3.23	3.42	3.73	4.10	
G10 SPORTVAN (110-IN. WB) CG11006/ZW9	4.3L V6 (LB4)	S	—	—	S	O ¹	—	5600 ⁷ 6000 ⁸
	5.0L V8 (L03)	S	S	—	O	—	—	5600 ⁷ 6000 ⁸
G10 SPORTVAN (125-IN. WB) CG11306/ZW9	4.3L V6 (LB4)	S	—	—	S	O ¹	—	5600 ⁷ 6000 ⁸
	5.0L V8 (L03)	S	S	—	O	—	—	6000 ²
G10 BEAUVILLE (125-IN. WB) CG11306/E94	5.7L V8 (L05)	S	S	—	O	—	—	6000 ²
	4.3L V6 (LB4)	S	—	—	S	O ¹	—	6600
G20 SPORTVAN (125-IN. WB) CG21306/E94	5.0L V8 (L03)	S	S	—	O ³	O ⁵	—	6600
	5.7L V8 (L05)	S	S	—	O	O ⁵	—	6600
G20 BEAUVILLE (125-IN. WB) CG21306/E94	6.2L V8 DIESEL (LH6)	S	—	—	S	O ⁵	—	6850 ⁹
	5.7L V8 (L05)	S	—	S	—	—	—	7400
G30 H.D. SPORTVAN (125-IN. WB) CG31306/ZW9/C6P	5.7L V8 (L05)	S	—	—	—	S	O	8600
	7.4L V8 (L19) ^{1,4}	S	—	—	S	O	O	8600
G30 H.D. BEAUVILLE (125-IN. WB) CG31306/E94/C6P	6.2L V8 DIESEL (LL4)	S	—	—	—	S	O	8600
	5.7L V8 (L05)	S	—	—	—	S	O	8600
G30 EXTENDED VAN SPORTVAN (146-IN. WB) CG31606/ZW9/C6P	7.4L V8 (L19) ^{1,4}	S	—	—	S	O	—	8600
	5.7L V8 (L05)	S	—	—	—	S	O	8600
G30 EXTENDED VAN BEAUVILLE (146-IN. WB) CG31606/E94/C6P	7.4L V8 (L19) ^{1,4}	S	—	—	S	O	—	8600

¹Requires KC4 Cooling. ²Requires P215/75R15 Tires. ³Standard with High Altitude Emissions. ⁴N/A G80 Locking Differential.
⁵Requires Z82 Trailering Equipment. ⁶Requires P235/75R15 Tires. ⁷Requires P205/75R15 Tires. ⁸N/A P205/75R15 Tires.

HORSEPOWER AND TORQUE RATINGS

ENGINE	4.3L V6	5.0L V8	5.7L V8		7.4L V8	6.2L V8 DIESEL	6.2L V8 H.D. DIESEL
RPO CODE	LB4	L03	L05		L19	LH6	LL4
RESTRICTIONS			7400 LBS. GVWR OR BELOW	AT 8600 LBS. GVWR	AT 8600 LBS. GVWR	UP TO 8600 LBS. GVWR	AT 8600 LBS. GVWR
CHART REFERENCE CODE	A	B	C	D	E	F	G
SAE NET HORSEPOWER @ RPM	150 @ 4000	170 @ 4000	195 @ 4000	190 @ 4000	230 @ 3600	145 @ 3600	155 @ 3500
SAE NET TORQUE Lb. Ft. @ RPM	230 @ 2400	265 @ 2400	290 @ 2400	300 @ 2400	385 @ 1600	260 @ 1900	285 @ 2000
FUEL SYSTEM	EFI	EFI	EFI	EFI	EFI	Gear Driven Mechanical Fuel Injection	Gear Driven Mechanical Fuel Injector
CLUTCH SIZE (in.)	-	-	-	-	-	-	-
STD. BATTERY Cold Cranking Amps @ 0°F	630	630	630	630	630	2 @ 540 Each	2 @ 540 Each

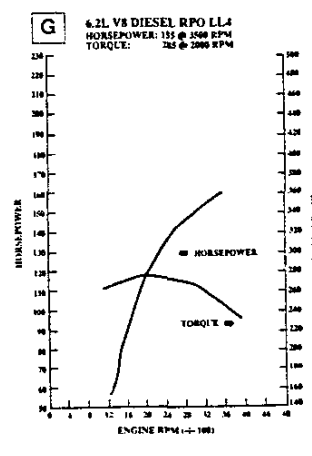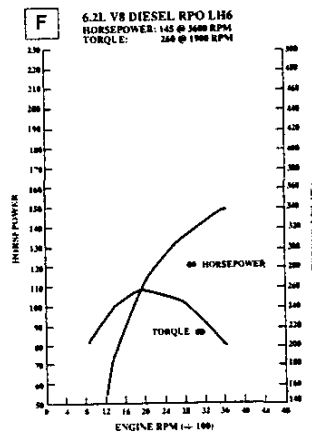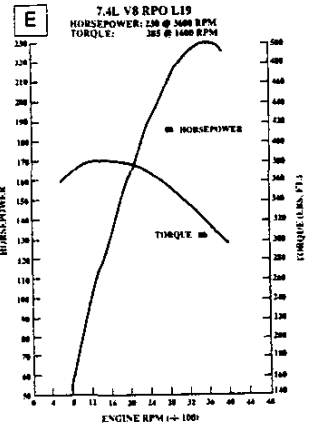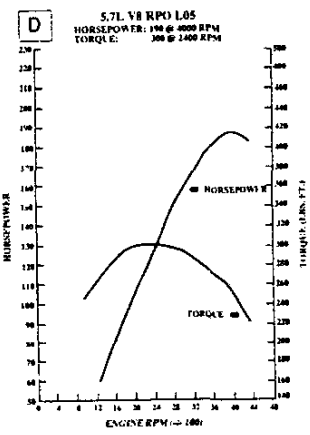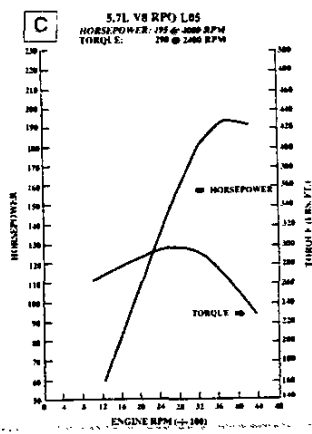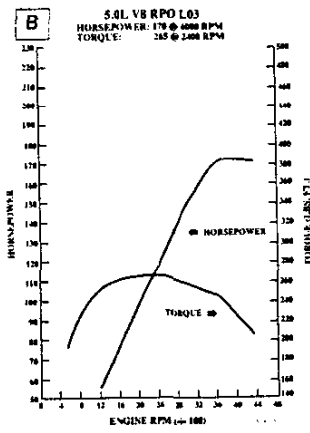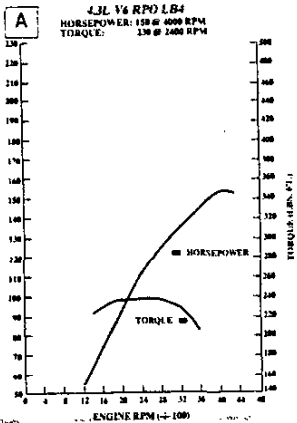

TRANSMISSION		
MODEL	AUTOMATIC 4-SPEED w/OVERDRIVE 4L80-E ¹	AUTOMATIC 4-SPEED w/OVERDRIVE 700 R4
RPO CODE	MX0	MX0
GEAR RATIOS		
First	2.48	3.06
Second	1.48	1.63
Third	1.00	1.00
Fourth	0.75	0.70
Reverse	2.08	2.29
GEAR TYPE	Planetary	Planetary
TORQUE CONVERTER		
Element Types	Pump/Stator/Turbine	Pump/Stator/Turbine
Lock-up Clutch	Automatic	Automatic
LUBRICANT CAPACITY (pints)		
Dry Fill	13.5	19
Refill	6	10

¹For Vehicles at 8600 lbs. GVWR.

REAR AXLES										
MAKE AND CAPACITY (lbs.)	GM 3500			GM 5700				Dana ¹ 5700 Full Floating		
PINION & RING GEARS	Hypoid			Hypoid				Hypoid		
Type	Hypoid			Hypoid				Hypoid		
Ratio	3.08	3.42	3.73	3.23	3.42	3.73	4.10	3.42	3.73	4.10
Pinion Teeth	13	12	11	13	12	11	9	12	11	10
Ring Gear Teeth	40	41	41	42	41	41	37	41	41	41
Ring Gear Dia. (in.)	8.5	8.5	8.5	9.5	9.5	9.5	9.5	10.5	10.5	10.5
DIFFERENTIAL	2-Pinion Tapered Roller			2-Pinion Tapered Roller				2-Pinion Tapered Roller		
Type	2-Pinion Tapered Roller			2-Pinion Tapered Roller				2-Pinion Tapered Roller		
Bearings, Type	2-Pinion Tapered Roller			2-Pinion Tapered Roller				2-Pinion Tapered Roller		
AXLE SHAFTS	Semi-Floating Integral Shaft and Drive Flange			Semi-Floating Integral Shaft and Drive Flange				Full-Floating Integral Shaft and Drive Flange		
Type	Semi-Floating Integral Shaft and Drive Flange			Semi-Floating Integral Shaft and Drive Flange				Full-Floating Integral Shaft and Drive Flange		
Minimum Diameter (in.)	—			—				1.38		
HOUSING @ SPRING SEAT	3.0 x .21			3.34 x .238				3.12 x .375		
Section Diameter and Thickness (in.)	3.0 x .21			3.34 x .238				3.12 x .375		

¹G80 N/A with L19 Engine.

MODEL	G10 SPORTVAN (110-IN. WB) (125-IN. WB)		G10 BEAUVILLE (125-IN. WB)	G20 SPORTVAN (125-IN. WB)		G20 BEAUVILLE (125-IN. WB)		G30 SPORTVAN (125-IN. WB)		G30 BEAUVILLE (125-IN. WB)		G30 EXTENDED SPORTVAN (146-IN. WB)	G30 EXTENDED BEAUVILLE (146-IN. WB)	
	CG11006/ZW9		CG11306/E94	CG21306/ZW9		CG21306/E94		CG31306/ZW9		CG31306/E94		CG31606/ZW9	CG31606/E94	
MODEL NUMBER	110-IN. WB	125-IN. WB	GAS		GAS	B3J	GAS	B3J	GAS		GAS		GAS	
STANDARD SUSPENSION														
PAYLOAD (Maximum lbs.) ¹	1451	1129	1118	2129	2379	2118	1922	2382	2381	3073	3073			
GVWR (lbs.)	5600		5600	6600	6850	6600	6850	7400	7400	8600	8600			
GAWR (lbs.) Front	2906		2906	3400	3670	3400	3670	3400	3400	3880 ²	3880 ²			
Rear	2906		2906	3400	3400	3400	3400	4200	4200	5360	5360			
FRONT SUSPENSION														
Type	Independent Coil Spring		Independent Coil Spring	Independent Coil Spring		Independent Coil Spring		Independent Coil Spring	Independent Coil Spring	Independent Coil Spring	Independent Coil Spring	Independent Coil Spring	Independent Coil Spring	
Standard Spring Capacity (Total lbs.)	3400		3400	3400	3670	3400	3670	3400	3400	3900	3900	3900	3900	
Front Shock Absorbers Piston Diameter (mm)	32		32	32		32		32	32	32	32	32	32	
Front Stabilizer Bar Diameter (in.)	1.06		1.06	1.06		1.06		1.06	1.06	1.06	1.06	1.06	1.06	
REAR SUSPENSION														
Type	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	
Standard Spring Capacity (Total lbs.)	3400		3400	3400		3400		4200	4200	5360	5360	5360	5360	
Leaves Per Spring	5		5	5		5		5	5	7	7	7	7	
Leaf Total Thickness (in.)	1.97		1.97	1.97		1.97		2.03	2.03	2.82	2.82	2.82	2.82	
Rear Shock Absorbers Piston Diameter (mm)	32		32	32		32		32	32	32	32	32	32	
FRONT AXLE														
Type	—		—	—		—		—	—	—	—	—	—	
Make	—		—	—		—		—	—	—	—	—	—	
Max. Capacity (lbs.)	3400		3400	3400	3675	3400	3675	3900	3900	3900	3900	3900	3900	
REAR AXLE														
Type	Semi-Floating		Semi-Floating	Semi-Floating		Semi-Floating		Semi-Floating	Semi-Floating	Full-Floating	Full-Floating	Full-Floating	Full-Floating	
Make	GM		GM	GM		GM		GM	GM	Dana	Dana	Dana	Dana	
Max. Capacity (lbs.)	3500		3500	3500		3500		5700	5700	5700	5700	5700	5700	
Pinion/Ring Gear Type	Hypoid		Hypoid	Hypoid		Hypoid		Hypoid	Hypoid	Hypoid	Hypoid	Hypoid	Hypoid	
STANDARD TIRES	Tubeless SBR P205/75R15		Tubeless SBR P205/75R15	Tubeless SBR P225/75R15 P235/75R15		Tubeless SBR P225/75R15 P235/75R15		Tubeless SBR LT225/75R16-D		Tubeless SBR LT225/75R16-E				
Capacity (lbs.) Front/Rear	1453		1453	1703	1843	1703	1843	1790/2190		1990/2680				
Inflation (psi) max. Front/Rear	35		35	35		35		45/60		50/80				
Revolutions per mile @ 45 mph	769		769	737	722	737	722	709		709				
WHEELS														
Size (in.) Front/Rear	15.0 x 6.00JJ		15.0 x 6.00JJ	15.0 x 6.00JJ		15.0 x 6.00JJ		16.0 x 6.5		16.0 x 6.5				
Capacity (lbs.)	1585		1585	1984		1984		2680		2680				
Bolt Holes	5		5	5		5		8		8				
Bolt Circle Dia. (in.)	5		5	5		5		6.5		6.5				
Offset (mm)	9		9	4		4		31.75		31.75				

¹ Based on Curb Weight.
² 3880 lb. front GAWR w/ 5.7 eng; 3900 lb. front GAWR w/ 7.4L eng.

MODEL	G10 SPORTVAN (110-IN. WB) (125-IN. WB)		G10 BEAUVILLE (125-IN. WB)		G20 SPORTVAN (125-IN. WB)		G20 BEAUVILLE (125-IN. WB)		G30 H.D. SPORTVAN (125-IN. WB)		G30 H.D. BEAUVILLE (125-IN. WB)		G30 EXTENDED SPORTVAN (146-IN. WB)		G30 EXTENDED BEAUVILLE (146-IN. WB)		
	CG11006/ZW9		CG11306/ZW9		CG11306/E94		CG21306/ZW9		CG21306/E94		CG31306/ZW9		CG31306/E94		CG31606/ZW9		CG31606/E94
MODEL NUMBER	GAS	GAS	GAS	GAS	B3J	GAS	B3J	GAS	B3J	GAS	B3J	GAS	B3J				
OPTIONAL SUSPENSION																	
OPTION	YCU/YCV/YCW		YCU/YCV/YCW		G50	G50	G50	G50	C6P		C6P		—		—		
PAYLOAD (Maximum lbs.) ¹	1451	1529	1518	6605	6855	2133	1927	3582/3289	3582/3289	—		—		—		—	
GVWR (lbs.)	6000		6000	6600	6850	6600	6850	8600		8600		—		—		—	
GAWR (lbs.) Front	3166		3166	3400	3670	3400	3670	3880		3880		—		—		—	
Rear	3166		3166	3400	3400	3400	3400	5360		5360		—		—		—	
FRONT SUSPENSION	Independent Coil Spring		Independent Coil Spring	Independent Coil Spring		Independent Coil Spring		Independent Coil Spring		Independent Coil Spring		—		—		—	
Type	Independent Coil Spring		Independent Coil Spring	Independent Coil Spring		Independent Coil Spring		Independent Coil Spring		Independent Coil Spring		—		—		—	
Standard Spring Capacity (Total lbs.)	3400		3400	3400	3670	3400	3670	3900		3900		—		—		—	
Front Shock Absorbers Piston Diameter (mm)	32		32	32		32		32		32		—		—		—	
Front Stabilizer Bar Diameter (in.)	1.06		1.06	1.06		1.06		1.06		1.06		—		—		—	
REAR SUSPENSION	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf		—		—		—	
Type	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf		—		—		—	
Standard Spring Capacity (Total lbs.)	3400		3400	4200		4200		5400		5400		—		—		—	
Leaves Per Spring	5		5	5		5		8		8		—		—		—	
Leaf Total Thickness (in.)	1.97		1.97	2.03		2.03		3.00		3.00		—		—		—	
Rear Shock Absorbers Piston Diameter (mm)	32		32	32		32		32		32		—		—		—	
FRONT AXLE	—		—	—		—		—		—		—		—		—	
Type	—		—	—		—		—		—		—		—		—	
Make	—		—	—		—		—		—		—		—		—	
Maximum Capacity (lbs.)	3400		3400	3400	3675	3400	3675	3900		3900		—		—		—	
REAR AXLE	Semi-Floating		Semi-Floating	Semi-Floating		Semi-Floating		Full-Floating		Full-Floating		—		—		—	
Type	Semi-Floating		Semi-Floating	Semi-Floating		Semi-Floating		Full-Floating		Full-Floating		—		—		—	
Make	GM		GM	GM		GM		Dana		Dana		—		—		—	
Maximum Capacity (lbs.)	3500		3500	3500		3500		5700		5700		—		—		—	
Pinion/Ring Gear Type	Hypoid		Hypoid	Hypoid		Hypoid		Hypoid		Hypoid		—		—		—	
STANDARD TIRES	Tubeless SBR P215/75R15		Tubeless SBR P215/75R15	Tubeless SBR P225/75R15		Tubeless SBR P225/75R15		Tubeless SBR LT225/75R16-E		Tubeless SBR LT225/75R16-E		—		—		—	
Front/Rear Capacity (lbs.) each	1583		1583	1703	1843	1703	1843	1990/2680		1990/2680		—		—		—	
Inflation (psi) max.	35		35	35		35		45/60		45/60		—		—		—	
Revolutions per mile @ 45 mph	753		753	737	722	737	722	709		709		—		—		—	
WHEELS	15.0 x 6.0JJ		15.0 x 6.0JJ	15.0 x 6.0JJ		15.0 x 6.0JJ		16.0 x 6.5		16.0 x 6.5		—		—		—	
Size (in.) Front/Rear	15.0 x 6.0JJ		15.0 x 6.0JJ	15.0 x 6.0JJ		15.0 x 6.0JJ		16.0 x 6.5		16.0 x 6.5		—		—		—	
Capacity (lbs.) each	1585		1585	1984		1984		2680		2680		—		—		—	
Bolt Holes	5		5	5		5		8		8		—		—		—	
Bolt Circle Dia. (in.)	5		5	5		5		6.5		6.5		—		—		—	
Offset (mm)	9		9	4		4		31.75		31.75		—		—		—	

¹Based on Curb Weight.

SPORTVAN

KEY: — - Not available
 SBR - Steel-Belted Radial Ply
 WW - Whitewall

WL - White Lettered
 BW - Blackwall
 AS - All-Season

TIRE SIZE	TYPE	RPO	PLY	LOAD RANGE	TIRE CAPACITY (lbs.) ea.	INFLATION (psi) max.	WHEEL SIZE (in.)	WHEEL CAPACITY (lbs.) ea.	BOLT HOLES	BOLT CIRCLE dia. (in.)	OFFSET (mm)	REV. PER. mile @ 45 mph
P205/75R15	AS/SBR/BW Front Rear Spare	XCE YCE ZCE	—	Std.	1453	35	15.0x6.0JJ	1585	5	5	9	769
P215/75R15	AS/SBR/BW Front Rear Spare	XCU YCU ZCU	—	Std.	1583	35	15.0x6.0JJ	1585	5	5	9	753
P215/75R15	AS/SBR/WW Front Rear Spare	XCV YCV ZCV	—	Std.	1583	35	15.0x6.0JJ	1585	5	5	9	753
P215/75R15	AS/SBR/WL Front Rear Spare	XCW YCW ZCW	—	Std.	1583	35	15.0x6.0JJ	1585	5	5	9	753
P225/75R15	AS/SBR/BW Front Rear Spare	XYT YET ZET	—	Std.	1703	35	15.0x6.0JJ	1984	5	5	4	737
P225/75R15	AS/SBR/WW Front Rear Spare	XEU YEU ZEU	—	Std.	1703	35	15.0x6.0JJ	1984	5	5	4	737
P225/75R15	AS/SBR/WL Front Rear Spare	XEV YEV ZEV	—	Std.	1703	35	15.0x6.0JJ	1984	5	5	4	737
P235/75R15	AS/SBR/BW Front Rear Spare	XFL YFL ZFL	—	Std.	1843	35	15.0x6.0JJ	1984	5	5	4	722
LT225/75R16-E	AS/SBR/BW Front Rear Spare	XHF YHF ZHF	—	Std.	1990 2680	50 80	16.0x6.5	2680	8	6.5	31.75	709
LT225/75R16-D	AS/SBR/BW Front Rear Spare	XHP YHP ZHP	—	Std.	1790 2190	45 60	16.0x6.5	2680	8	6.5	31.75	709

OPTIONAL WHEELS

RPO	DESCRIPTION	WHEEL SIZE (in.)	CAPACITY	BOLT HOLES	BOLT CIRCLE dia. (in.)	OFFSET (mm)
N67 ¹	Wheels—Rally (Includes Bright Trim Rings and Special Hub Caps)	15.0x6.50	1843	5	5	14
PF3 ¹	Wheels—Aluminum, Cast (Includes Special Hub Caps)	15.0x6.50	1843	5	5	14

¹N/A G30 Series Models.




MODEL	G10 SPORTVAN/ BEAUVILLE	G20 SPORTVAN/ BEAUVILLE		G30 SPORTVAN/ BEAUVILLE	G30 H.D. SPORTVAN/ BEAUVILLE		G30 EXTENDED SPORTVAN/ BEAUVILLE
MODEL NUMBER	CG11006/ZW9- CG11306/ZW9- C11306/E94	CG21306/ZW9 CG21306/E94		CG31306/ZW9 CG31306/E94	CG31306/ZW9/C6P CG31306/E94/C6P		CG31606/ZW9/C6P CG31606/E94/C6P
	GAS	GAS	B3J	GAS	GAS	B3J	GAS
STEERING							
Type	Variable Ratio Integral Power		Variable Ratio Integral Power		Variable Ratio Integral Power		Variable Ratio Integral Power
Steering Ratio	17.2:1		17.2:1		17.2:1		17.2:1
Turning Diameter Curb-To-Curb (ft.)	41.3/45.9		46.0		48.5		54.0
Wall-To-Wall (ft.)	42.7/46.2		47.5		49.8		55.3
BRAKES							
GVWR (lbs.)	5600/ 6000		6600	6850	7400	8600	
Type Rear Wheel Anti-Lock Braking System	Vac. Power Front Disc/ Rear Drum		Vac. Power Front Disc/ Rear Drum	Hyd. Power Front Disc/ Rear Drum	Vac. Power Front Disc/ Rear Drum	Vac. Power Front Disc/ Rear Drum	Hyd. Power Front Disc/ Rear Drum
Booster Diaphragm Diameter (in.)	9.5 x 8.0 Tandem		9.5 x 8.0 Tandem	—	9.5 x 8.0 Tandem	9.5 x 8.0 Tandem	—
Front Rotor Size Diameter x Thickness (in.)	11.86 x 1.29		11.86 x 1.29		- 12.50 x 1.28		12.50 x 1.28
Front Facing Contact Per Axle (sq. in.)	37.63		37.63		42.98		42.98
Rear Drum Size Diameter x Width (in.)	11.15 x 2.75		11.15 x 2.75		13.0 x 2.5		13.0 x 2.5
Rear Facing Contact Per Axle (sq. in.)	107.42		107.42		116.73		116.73
Parking Brake Type	Cable To Rear Wheels		Cable To Rear Wheels		Cable To Rear Wheels		Cable To Rear Wheels

MODEL	G10 SPORTVAN/ BEAUVILLE (110-IN. WB/ 125-IN. WB)			G20 SPORTVAN/ BEAUVILLE (125-IN. WB)			G30 SPORTVAN/ BEAUVILLE (125-IN. WB)			G30 H.D. SPORTVAN (125-IN. WB)			G30 H.D. BEAUVILLE (125-IN. WB)			G30 EXTENDED SPORTVAN/ BEAUVILLE (146-IN. WB)			
MODEL NUMBER	CG11006/ZW9 CG11306/ZW9 CG11306/E94			CG21306/ZW9 CG21306/E94			CG31306/ ZW9 CG31306/ E94			CG31306/ZW9 /C6P			CG31306/ E94/ C6P			CG31606/ZW9/ C6P CG31606/E94/ C6P			
	GAS			GAS		B3J	GAS			GAS		B3J	GAS		B3J		GAS		
ELECTRICAL																			
ENGINE	4.3L	5.0L	5.7L	4.3L	5.0L	5.7L	6.2L	5.7L	7.4L	5.7L	7.4L	6.2L	5.7L	7.4L	6.2L	5.7L	7.4L		
STANDARD BATTERY Cold Cranking Amps @ 0 °F @ -20 °F Reserve Capacity Minutes @ 80 °F	630 470 115			630 470 115			630 470 115	2 With 540 Ea. 405	630 470 115			2 With 540 Ea. 405	630 470 115			2 With 540 Ea. 405	630 470 115		
STANDARD ALTERNATOR Maximum Capacity (Amps) Maximum Watts @ 12 Volts Nominal Amp @ Idle approximately Drive Pulley Ratio Model Number	85 1020 30 3.2:1 CS130			85 1020 30 3.2:1 CS130			85 1020 30 3.2:1 CS130	100 1020 36 3.0:1 CS130	85 1020 30 3.2:1 CS130			100 1200 36 3.0:1 CS130	85 1020 30 3.2:1 CS130			100 1200 36 3.0:1 CS130	85 1020 30 3.2:1 CS130		
OPTIONAL ALTERNATOR	w/C60 or C69			w/C60 or C69		w/C60 C60	—	w/C60 or C69 w/o 7.4L Eng.	w/C60 or C69 w/o 7.4L Eng.			—	w/C60 or C69 w/o 7.4L Eng.			—	w/C60 or C69 w/o 7.4L Eng.		
Maximum Capacity (Amps) Maximum Watts @ 12 Volts Nominal Amp @ Idle approximately Drive Pulley Ratio Model Number	100 1200 36 3.2:1 CS130			100 1200 36 3.2:1 CS130		100 1200 36 3.2:1 CS130	— — — — —	100 1200 36 3.2:1 CS130			100 1200 36 3.2:1 CS130	100 1200 36 3.2:1 CS130			100 1200 36 3.2:1 CS130	100 1200 36 3.2:1 CS130			
OPTIONAL ALTERNATOR Maximum Capacity (Amps) Maximum Watts @ 12 Volts Nominal Amp @ Idle approximately Drive Pulley Ratio Model Number	— — — — —			— — — — —		— — — — —	— w/C69 105 1260 63 — 3.2:1 CS130	— w/C69 105 1260 63 — 3.2:1 CS130			— w/C69 105 1260 63 — 3.2:1 CS130	— w/C69 105 1260 63 — 3.2:1 CS130			— w/C69 105 1260 63 — 3.2:1 CS130	— w/C69 105 1260 63 — 3.2:1 CS130			

NOTE: This alternator is available only as part of noted RPO.

ALTERNATOR CURVES

(Refer to Electrical Chart for Availability).

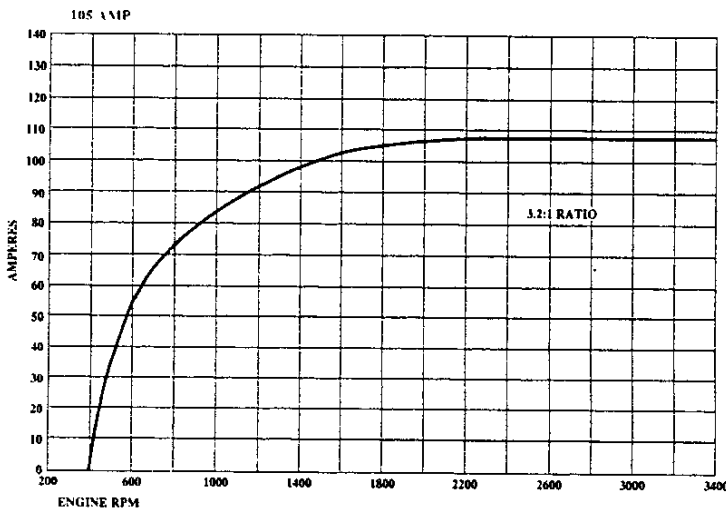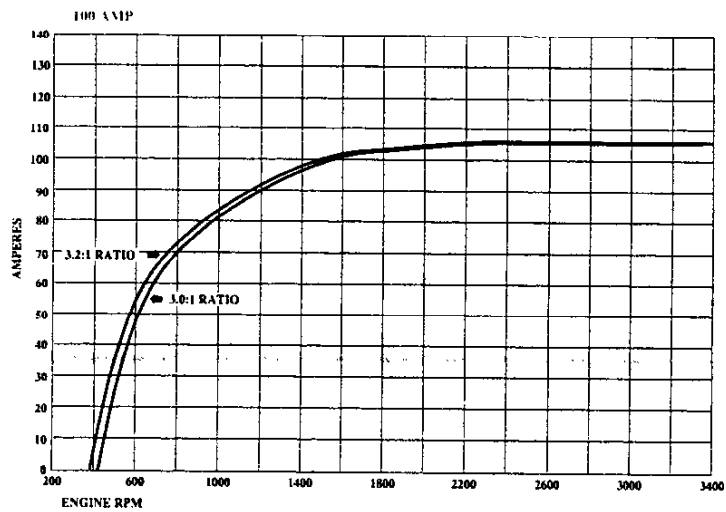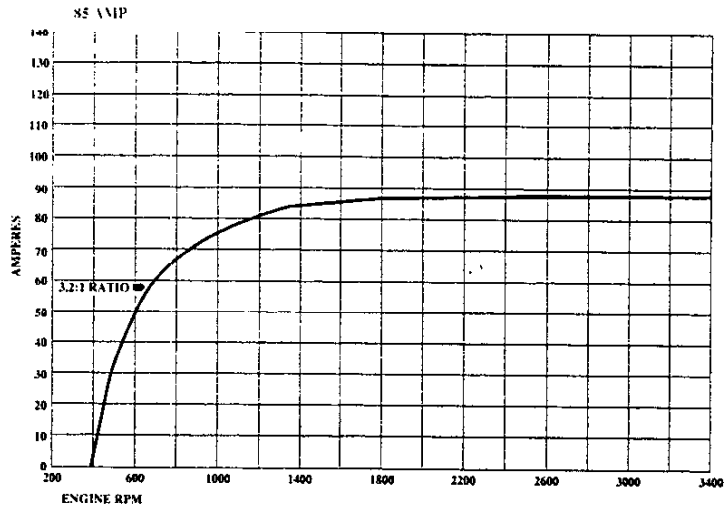

MODEL	G10 SPORTVAN BEAUVILLE/ (110-IN. WB/125-IN. WB)			G20 SPORTVAN BEAUVILLE (125-IN. WB)			G30 SPORTVAN BEAUVILLE (125-IN. WB)			G30 H.D. SPORTVAN/ BEAUVILLE (125-IN. WB)			G30 EXTENDED SPORTVAN BEAUVILLE/ (146-IN. WB)		
MODEL NUMBER	CG11006/ZW9 CG11306/EW9 CG11306/E94			CG31306/ZW9 CG21306/E94			CG31306/ZW9 CG31306/E94			CG31306/ZW9/C6P CG31306/E94/C6P			CG31606/ZW9/ C6P CG31606/E94/ C6P		
STANDARD COOLING SYSTEM															
ENGINE	4.3L	5.0L	5.7L	4.3L	5.0L	5.7L	6.2L	5.7L	7.4L	5.7L	7.4L	6.2L	5.7L	7.4L	
Radiator Thickness (in.)	.93	.98	.98	.93	.98	.98	1.57	.98	1.34	.98	1.34	1.57	.98	1.34	
System Capacity (gal.)	3.4	4.2	4.2	3.4	4.2	4.2	6.3	4.2	4.2	4.2	5.8	6.2	4.2	5.8	
Fan-No. Blades x Diameter x Pitch (in.)	3 x 19 x 2.0	3 x 19 x 2.0	3 x 19 x 2.0	3 x 19 x 2.0	3 x 19 x 2.0	3 x 19 x 2.0	5 x 20 x 2.87	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 20 x 2.61	5 x 20 x 2.87	5 x 19.5 x 2.0	5 x 20 x 2.61	
OPTIONAL COOLING SYSTEMS															
ENGINE	4.3L	5.0L	5.7L	4.3L	5.0L	5.7L	6.2L	5.7L	7.4L	5.7L	7.4L	6.2L	5.7L	7.4L	
OPT. H.D. RADIATOR OR AIR CONDITIONING	V05/C60/C69														
Radiator Thickness (in.)	.93	.98	1.57	.93	.98	1.57	1.57	1.57	1.34	1.57	1.34	2.17	1.57	1.34	
System Capacity (gal.)	3.3	4.2	4.2	3.3	4.2	4.2	6.2	4.2	5.8	4.2	5.8	6.2	4.2	5.8	
Fan-No. Blades x Diameter x Pitch (in.)	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.56	5 x 19.5 x 2.56	5 x 20 x 2.0	5 x 19.5 x 2.56	5 x 20 x 2.56	5 x 19.5 x 2.0	5 x 20 x 2.61	5 x 20 x 2.87	5 x 19.5 x 2.0	5 x 20 x 2.61	
OPT. H.D. RADIATOR AND TRANS. OIL COOLER	V02 ¹	V02 ¹	V02 ¹	V02 ¹	V02 ¹	V02 ¹	—	V02 ¹	—	V02 ¹	—	—	V02 ¹	—	
Radiator Thickness (in.)	1.34	1.57	1.57	1.34	1.57	1.57	—	1.57	—	1.57	—	—	1.57	—	
System Capacity (gal.)	3.4	4.2	4.2	3.4	4.5	4.5	—	4.5	—	4.5	—	—	4.5	—	
Fan-No. Blades x Diameter x Pitch (in.)	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	—	5 x 19.5 x 2.0	—	5 x 19.5 x 2.0	—	—	5 x 19.5 x 2.0	—	

¹LB4 eng. reqs. KC4 engine oil cooler. Included w/Z82 Trailing on G20 and G30 models.



DIMENSIONS

SPORTVAN

MODEL	G10 SPORTVAN	G10 SPORTVAN/BEAUVILLE	G20 SPORTVAN/BEAUVILLE	G30 SPORTVAN/BEAUVILLE	G30 H.D. SPORTVAN/BEAUVILLE	G30 EXTENDED SPORTVAN/BEAUVILLE
	110-IN. WB	125-IN. WB	125-IN. WB	125-IN. WB	125-IN. WB	146-IN. WB
MODEL NUMBER	CG11006/ZW9	CG11306/ZW9 CG11306/E94	CG21306/ZW9 CG21306/E94	CG31306/ZW9 CG31306/E94	CG31306/ZW9/C6P CG31306/E94/C6P	CG31606/ZW9/C6P CG31606/E94/C6P
			GAS	B3J		

EXTERIOR DIMENSIONS

BODY									
Wheelbase (in.)	WB	110.0	125.0	125.0	125.0	125.0	125.0	146.0	
Overall Length (in.)	OAL	178.2	202.2	202.2	202.2	202.2	202.2	223.2	
Overall Height (in.)	OAH	79.4	79.1	79.5	81.8	81.9	81.9	82.3	
Maximum Width (in.)	OAW	79.5	79.5	79.5	79.5	79.5	79.5	79.5	
Bumper to Axle	BA								
Front (in.)		29.6	29.6	29.6	29.6	29.6	29.6	29.6	
Rear (in.)		38.5	47.5	47.5	47.5	47.5	47.5	47.5	
Ground to Top of Rear Load Floor (in.)	—	24.7	24.4	24.9	27.0	27.0	27.0	29.6	
Ground Clearance	—								
Front (in.)		7.4	7.2	7.8	8.1	9.6	10.0	9.4	8.9
Rear (in.)		7.9	7.7	8.6	9.9	7.3	8.5	8.5	9.6
Side Load Door Sliding (in.)	—								
Opening Height		49.2	49.2	49.2	49.2	49.2	49.2	—	
Opening Width		44.2	44.2	44.2	44.2	44.2	44.2	—	
Side Load Door Swing Out (in.)	—								
Opening Height		48.5	48.5	48.5	48.5	48.7	48.7	48.7	
Opening Width		46.7	46.7	46.7	46.7	46.7	46.7	46.7	
—Large Door		30.3	30.3	30.3	30.3	30.3	30.3	30.3	
—Small Door		19.2	19.2	19.2	19.2	19.2	19.2	19.2	
Rear Load Door (in.)	DH								
Opening Height		48.8	48.8	48.8	48.8	48.8	48.8	48.8	
Opening Width	DW	54.4	54.4	54.4	54.4	54.4	54.4	54.4	
Step Up Height (in.)									
Front Door		17.9	17.7	18.3	19.8	19.8	19.8	20.5	
Side Load Door		19.7	19.4	19.8	22.2	22.2	22.2	22.3	
SIGN PANEL AREA (in.)	Shaded Area	29 x 97	29 x 121½	29 x 121½	29 x 121½	29 x 121½	29 x 121½	29 x 142½	

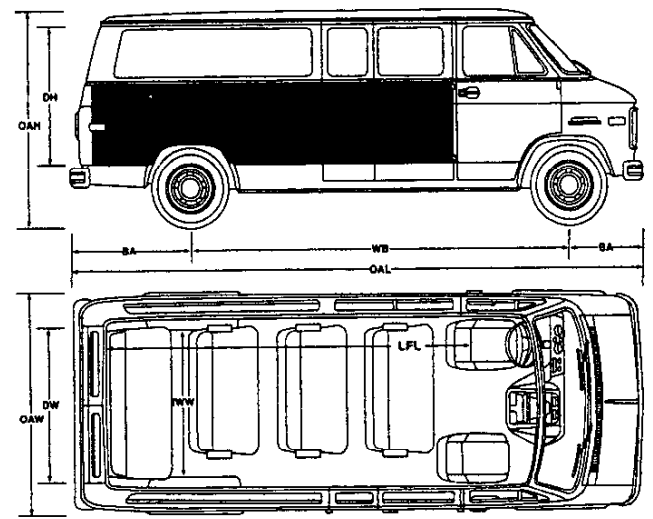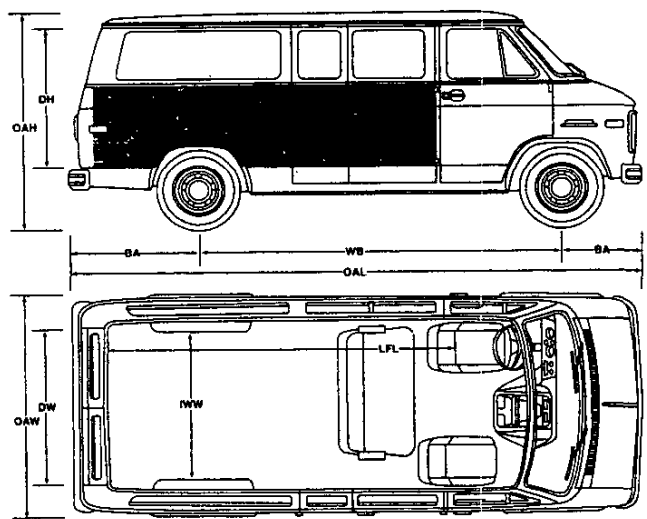

MODEL		G10 SPORTVAN	G10 SPORTVAN/ BEAUVILLE	G20 SPORTVAN/ BEAUVILLE	G30 SPORTVAN/ BEAUVILLE	G30 H.D. SPORTVAN/ BEAUVILLE	G30 EXTENDED SPORTVAN/ BEAUVILLE
		110-IN. WB	125-IN. WB	125-IN. WB	125-IN. WB	125-IN. WB	146-IN. WB
MODEL NUMBER		CG11006/ZW9	CG11306/ZW9 CG11306/E94	CG21306/ZW9 CG21306/E94	CG31306/ZW9 CG31306/E94	CG31306/ZW9/C6P CG31306/E94/C6P	CG31606/ZW9/C6P CG31606/E94/C6P
				GAS B3J			
INTERIOR DIMENSIONS							
Headroom (in.) Front/Middle 1/ Middle 2/Rear	HR	40.8/ 40.9/—/—	40.8/ 40.9/—/—	40.8/ 40.9/40.7/—	40.8/ 40.9/40.7/40.1	40.8/ 40.9/40.7/40.1	40.8/ 40.9/40.7/40.1
Leg Room (in.) Front/Middle 1/ Middle 2/Rear	LR	39.5/ 37.2/—/—	39.5/ 37.2/—/—	39.5/ 37.2/39.5/—	39.5/ 37.2/39.5/40.5	39.5/ 37.2/39.5/40.5	39.5/ 37.2/39.5/40.5
Shoulder Room (in.) Front/ Middle 1/Middle 2/Rear	SR	68.8/ 63.5/—/—	68.8/ 63.5/—/—	68.8/ 63.5/—/—	68.8/ 63.5/63.5/71.0	68.8/ 63.5/63.5/71.0	68.8/63.5/ 63.5/71.0
Hip Room (in.) Front/ Middle 1/Middle 2/Rear	HP	69.7/ 51.5/—/—	69.7/ 51.5/—/—	69.7/ 51.5/51.5/—	69.7/ 51.5/51.5/63.0	69.7/ 51.5/51.5/63.0	69.7/ 51.5/51.5/63.0
Load Floor Length w/Front Seat/ w/Middle Seat 2	LFL	102.5/ 67.7	126.5/ 91.7	126.5/ 91.7	126.5/ 91.7	126.5/ 91.7	147.5 112.7
Interior Height (in.)	IH	53.0	53.0	53.0	53.0	53.0	53.0
Interior Width (in.) Beltline Between Wheelhousings	IWW	71.0 53.5	71.0 53.5	71.0 53.5	71.0 53.5	71.0 53.5	71.0 53.5
Cargo Volume w/Front Seat (cu. ft.)	CV	207.0	260.0	260.0	260.0	260.0	206.0
FUEL TANK							
Std. Tank Nominal (gal.)		22	33	33	33	33	33
Location of Tank		Behind Rear Axle	Behind Rear Axle	Behind Rear Axle	Behind Rear Axle	Behind Rear Axle	Behind Rear Axle
Location of Filler		Left Rear	Left Rear	Left Rear	Left Rear	Left Rear	Left Rear

OPTIONS

KEY S - Standard
O - Optional
— Not Available

- 1. G10 SPORTVAN 110-IN. WB (CG11006/ZW9)
- 2. G10 SPORTVAN 125-IN. WB (CG11306/ZW9)
- 3. G10 BEAUVILLE 125-IN. WB (CG11306/E94)
- 4. G20 SPORTVAN 125-IN. WB (CG21306/ZW9)
- 5. G20 BEAUVILLE 125-IN. WB (CG21306/E94)
- 6. G30 SPORTVAN 125-IN. WB (CG31306/ZW9)
- 7. G30 BEAUVILLE 125-IN. WB (CG31306/E94)
- 8. G30 H.D. SPORTVAN 125-IN. WB (CG31306/ZW9/C6P)
- 9. G30 H.D. BEAUVILLE 125-IN. WB (G31306/E94/C6P)
- 10. G30 EXT. SPORTVAN 146-IN. WB (G31606/ZW9/C6P)
- 11. G30 EXT. BEAUVILLE 146-IN. WB (G31606/E94/C6P)

				MODELS										
				2-WHEEL DRIVE										
OPTION	CODE	DESCRIPTION	RESTRICTIONS	1	2	3	4	5	6	7	8	9	10	11
AIR CONDITIONING														
Front	C60	Incl w/C69 Front and Rear Air	G10—E94 Beauville w/L03/L05 Eng reqs P215/75R15 Tires	O	O	O	O	O	O	O	O	O	O	O
Front and Rear	C69	Incls C60 Front Air	G20 reqs G50 springs; G30 N/A ZP3 Seating	O	O	O	O	O	O	O	O	O	O	O
AXLES, REAR														
Locking Differential	G80	(See Powertrains)	CG31606 reqs L05 Eng N/A w/L19 Eng	O	O	O	O	O	O	O	O	O	O	O
COLD CLIMATE PACKAGE														
	V10	Incls Engine Block Heater and Increased Anti-Freeze Protection	N/A w/Diesel Engine	O	O	O	O	O	O	O	O	O	O	O
CONVENIENCE PACKAGE														
Driver's	ZQ3	Comfortilt Steering Wheel and Electronic Speed Control		O	O	O	O	O	O	O	O	O	O	O
Operating	ZQ2	Incls AU3 Power Door Locks Plus Power Windows		O	O	O	O	O	O	O	O	O	O	O
COOLING SYSTEM														
Engine Oil	KC4	Incl w/Z82 Trailering or L19 Eng	N/A w/B3J Diesel Equip; Req LB4 Eng and MX0 Trans w/G10 models; w/L03 or L05 Eng reqs V02 H.D. Cooling	O	O	O	O	O	O	O	O	O	O	O
Radiator and Transmission Heavy-Duty	V02	Incl w/Z82 Trailering. Incls H.D. Radiator and H.D. Trans Oil Cooler	LB4 Eng reqs KC4 Cooler; N/A L19, LH6 or LL4 Eng N/A C60 or C69 Air; LB4 Eng reqs KC4 Engine Oil Cooler; N/A L19, LH6, or LL4 Eng	O	O	O	O	O	O	O	O	O	O	O
Heavy-Duty Radiator	V05			O	O	O	O	O	O	O	O	O	O	O
DIESEL EQUIPMENT PACKAGE														
	B3J	Incls Engine Oil Cooler, Engine Block Heater, H.D. Radiator, Dual Exhaust System, Additional Insulation and Special Instrumentation	Required w/LH6 or LL4 Eng	—	—	—	O	O	—	—	O	O	—	—
DOOR LOCK SYSTEM, POWER														
	AU3	Incl w/ZQ2 Conv Pkg		O	O	O	O	O	O	O	O	O	O	O
DOOR, SIDE														
	E24 YA2	Swing-Out Sliding	Standard Opt at no extra cost	S	S	S	S	S	S	S	S	S	S	S
ENGINES														
4.3-liter V6 EFI	LB4	(See Powertrains)		S	S	S	S	S	—	—	—	—	—	—
5.0-liter V8 EFI	L03		N/A CG11306 at 5600 lbs GVWR	—	O	O	O	O	S	S	S	S	S	S
5.7-liter V8 EFI	L05		N/A CG11306 at 5600 lbs GVWR	—	O	O	O	O	S	S	S	S	S	S
7.4-liter V8 EFI	L19			—	—	—	—	—	—	—	O	O	O	O
6.2-liter V8 HD Diesel	LL4		Reqs B3J	—	—	—	O	O	—	—	—	—	—	—
6.2-liter V8 Diesel	LH6 ¹		Reqs B3J	—	—	—	O	O	—	—	—	—	—	—
GLASS														
	AJ1	Heavily Tinted		O	O	O	O	O	O	O	O	O	O	O
HEATER														
Rear Seat	C36	Located on Left Side Forward of Rear Wheelhouse		O	O	O	O	O	O	O	O	O	O	O
LIGHTING, AUXILIARY														
	TR9	Incl Reading Lamps, Front and Rear Dome Lamps, and Headlamp Warning Buzzer		O	O	O	O	O	O	O	O	O	O	O
MIRRORS, EXTERIOR														
	D45	Below-Eye-Line Type; Stainless Steel 6.5" x 9.0"		O	O	O	O	O	O	O	O	O	O	O
PAINT, EXTERIOR														
Solid	ZY1	(See Color and Trim)		S	S	S	S	S	S	S	S	S	S	S
Two-tone	ZY4			O	O	O	O	O	O	O	O	O	O	O
RADIO EQUIPMENT														
Electronically-Tuned AM/FM Stereo Radio w/Seek-Scan and Digital Clock	UM7	14 Presets, Digital Display, two 4" x 6" Front Speakers/ two 4" x 10" Rear Speakers, 28 Watts Total Power Output		O	O	O	O	O	O	O	O	O	O	O
Electronically-Tuned AM/FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape and Digital Clock	UM6	14 Presets, Digital Display, two 4" x 6" Coaxial Front Speakers/ two 4" x 10" ERS, 28 Watts Total Power Output		O	O	O	O	O	O	O	O	O	O	O
Electronically-Tuned AM Stereo FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape w/Search-Repeat, Graphic Equalizer and Digital Clock	UX1	14 Presets, Digital Display, two 4" x 6" Coaxial Front Speakers/ two 4" x 10" ERS Rear Speakers, 28 Watts Total Power Output		O	O	O	O	O	O	O	O	O	O	O
Radio Delete	UL5			O	O	O	O	O	O	O	O	O	O	O

¹ LH6 6.2 Liter V8 Diesel not available for registration in California.

1991
SPORTVAN

OPTIONS

KEY S - Standard
O - Optional
- - Not Available


- 1. G10 SPORTVAN 110-IN. WB (CG11006/ZW9)
- 2. G10 SPORTVAN 125-IN. WB (CG11306/ZW9)
- 3. G10 BEAUVILLE 125-IN. WB (CG11306/E94)
- 4. G20 SPORTVAN 125-IN. WB (CG21306/ZW9)
- 5. G20 BEAUVILLE 125-IN. WB (CG21306/E94)
- 6. G30 SPORTVAN 125-IN. WB (CG31306/ZW9)
- 7. G30 BEAUVILLE 125-IN. WB (CG31306/E94)
- 8. G30 H.D. SPORTVAN 125-IN. WB (CG31306/ZW9/C6P)
- 9. G30 H.D. BEAUVILLE 125-IN. WB (CG31306/E94/C6P)
- 10. G30 EXT. SPORTVAN 146-IN. WB (CG31606/ZW9/C6P)
- 11. G30 EXT. BEAUVILLE 146-IN. WB (G31606/E94/C6P)

MODELS										
2-WHEEL DRIVE										
1	2	3	4	5	6	7	8	9	10	11
SEATING, REAR										
One Additional Seat										
				O	O			O	O	
Two Additional Seats										
						S	S	O	O	
Three Additional Seats										
									O	O
Additional Seat Not Desired										
				O	O			O	O	O
SPECIAL TRAILERING EQUIPMENT										
Z72 Light-Duty; Incls Deadweight Trailer Hitch and 5-Lead Wiring Harness										
				O	O	O	O	O	O	O
Z82 Heavy-Duty; Incls Weight Distributing Platform Hitch and 7-Lead Wiring Harness and H.D. Flasher										
					O	O	O	O	O	O
SPRINGS, HEAVY DUTY										
G50 Rear										
				S	S	S	O	O	S	S
TIRE EQUIPMENT										
(See Wheels and Tires for Details)										
P205/75R15 BW										
	XCE			S	S	S				
P215/75R15 BW										
	YCE									
P215/75R15 WS										
	ZCE			O	O	O				
P215/75R15 RWL										
	XCV			O	O	O				
P225/75R15 BW										
	YCV			O	O	O				
P225/75R15 WS										
	ZCV			O	O	O				
P225/75R15 RWL										
	XCW			O	O	O				
P235/75R15 BW										
	YCW									
LT225/75R16D BW										
	ZCW									
P225/75R15 BW										
	XET					S	S			
P225/75R15 WS										
	YET									
P225/75R15 RWL										
	ZET									
P235/75R15 BW										
	XEU									
LT225/75R16E BW										
	YEU									
P235/75R15 BW										
	ZEU									
P235/75R15 BW										
	XEV									
P235/75R15 BW										
	YEV									
P235/75R15 BW										
	ZEV									
P235/75R15 BW										
	XFL									
P235/75R15 BW										
	YFL									
P235/75R15 BW										
	ZFL									
LT225/75R16D BW										
	XHP							S	S	
LT225/75R16E BW										
	YHP									
P235/75R15 BW										
	ZHP									
P235/75R15 BW										
	XHF								S	S
P235/75R15 BW										
	YHF									
P235/75R15 BW										
	ZHF									
TRANSMISSIONS										
4-Speed Automatic										
	MX0	(See Powertrains) With Overdrive		S	S	S	S	S	S	S
TRAVEL BED SEATING PACKAGE										
B6S Replaces Std Bench Seat										
			Reqs Blue or Saddle Custom Trim; on G20/30 models reqs Additional Seat or YG4 Seat Not Desired; w/YG4 Seat Not Desired Replaces Standard Bench Seat; w/AQ3 Seat Replaces the AQ3 Seat; reqs G50 H.D. Rear Springs on G20		O	O	O	O		O
WHEELS										
(See Wheels and Tires)										
Aluminum Rally										
	PF3	15" x 6.5" Incls Matching Spare Wheel	15" x 6" Steel Spare Wheel	O	O	O	O	O		
WHEEL COVERS										
P01 Bright metal, Full cover										
							O	O	O	O

SOLID COLOR

(ZY1)

Solid paint (ZY1) is standard on all models. All painted areas of the body are the same color. The only available Color Code 1/Color Code 2 exterior paint combinations are those displayed in the chart below. Recommended interior trim colors are indicated by the symbol ●. However, any interior trim color may be ordered if desired by the customer. For more information, refer to Seats and Interior Trim pages as well as the Truck Order Guide.

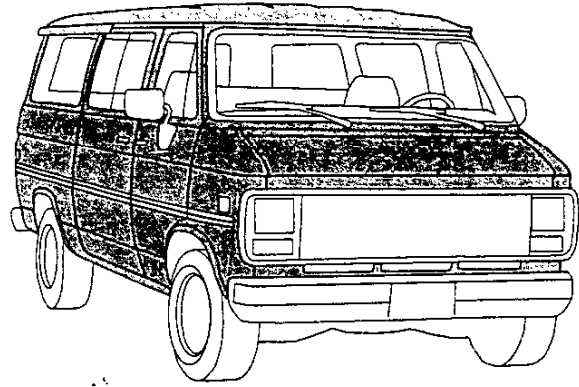


KEY: ●—Recommended Blank—Available

EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS			
COLOR CODE 1	COLOR CODE 2		Blue	Garnet	Saddle	Gray
12 Frost White	12 Frost White	—	●	●	●	●
19 Midnight Black	19 Midnight Black	—	●	●	●	●
26 Sky Blue	26 Sky Blue	—	●			●
37 Wheat	37 Wheat	—			●	
44 Emerald Met.	44 Emerald Met.	—			●	
47 Royal Blue Met.	47 Royal Blue Met.	—	●			●
51 Sedona Tan	51 Sedona Tan	—			●	
72 Apple Red	72 Apple Red	—		●		●
78 Burgundy Met.	78 Burgundy Met.	—		●		●
90 Steel Gray Met.	90 Steel Gray Met.	—		●		●

DELUXE TWO-TONE (ZY4)

Deluxe two-tone Paint (ZY4) paint colors include black body side and rear moldings with bright trim (except with Beauville models where bright body side and rear moldings with black trim are already included). Color code 1 is applied to the areas above the belt line styling crease line and below the moldings. Color code 2 is applied to the areas between the belt line styling crease line and the moldings. A two-color decal accent stripe is used at the upper paint break. The only available Color Code 1/Color Code 2 exterior paint combinations are those displayed in the chart below. Recommended interior trim colors are indicated by the symbol •. However, any interior trim color may be ordered if desired by the customer. For more information, refer to Seats and Interior Trim pages as well as the Truck Order Guide.

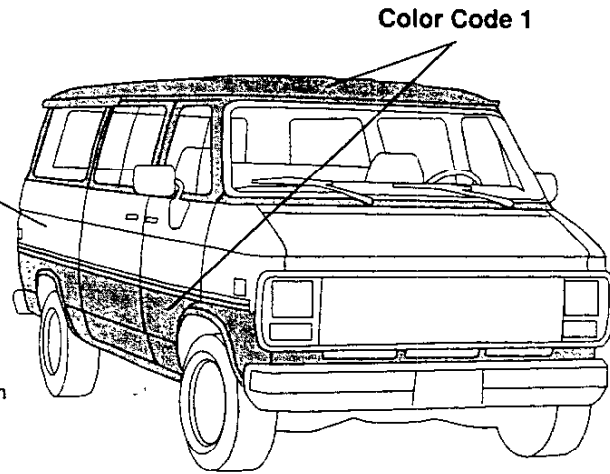

KEY: • — Recommended

Blank — Available

EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS			
COLOR CODE 1	COLOR CODE 2		Blue	Garnet	Saddle	Gray
12 Frost White	26 Sky Blue	Lt. Blue/Dk. Blue/Lt. Blue	•			
	47 Royal Blue Met.	Lt. Blue/Dk. Blue/Lt. Blue	•			
	72 Apple Red	Vermillion/Dk. Carmine/Vermillion		•		
	72 Apple Red	Vermillion/Dk. Carmine/Vermillion				•
	90 Steel Gray Met.	Silver/Black/Silver				•
19 Midnight Black	12 Frost White	Vermillion/Dk. Carmine/Vermillion		•		
	12 Frost White	Vermillion/Slate/Vermillion				•
	72 Apple Red	Vermillion/Dk. Carmine/Vermillion		•		
	72 Apple Red	Vermillion/Slate/Vermillion				•
	90 Steel Gray Met.	Vermillion/Slate/Vermillion				•
26 Sky Blue	12 Frost White	Lt. Blue/Dk. Blue/Lt. Blue	•			
	12 Frost White	Silver/Black/Silver				•
	47 Royal Blue Met.	Lt. Blue/Dk. Blue/Lt. Blue	•			
37 Wheat	51 Sedona Tan	Gold/Black/Gold			•	
43 Apple Red	12 Frost White	Vermillion/Slate/Vermillion		•		•
	19 Midnight Black	Vermillion/Slate/Vermillion				•
	19 Midnight Black	Vermillion/Dk. Carmine/Vermillion		•		
	90 Steel Gray Met.	Vermillion/Slate/Vermillion		•		•
44 Emerald Met.	37 Wheat	Gold/Black/Gold			•	
	51 Sedona Tan	Gold/Black/Gold			•	
47 Royal Blue Met.	12 Frost White	Lt. Blue/Dk. Blue/Lt. Blue	•			•
	26 Sky Blue	Lt. Blue/Dk. Blue/Lt. Blue	•			•
51 Sedona Tan	37 Wheat	Dk. Brown/Doe Skin/Dk. Brown			•	
78 Burgundy Met.	12 Frost White	Vermillion/Dk. Carmine/Vermillion		•		•
90 Steel Gray Met.	12 Frost White	Silver/Black/Silver				•
	12 Frost White	Vermillion/Slate/Vermillion		•		
	19 Midnight Black	Vermillion/Slate/Vermillion				•
	19 Midnight Black	Vermillion/Dk. Carmine/Vermillion		•		

Colors



■ The paint samples below are representative of the exterior colors offered on the Sportvan. Refer to the Color and Trim availability charts to determine specific availability. Red indicates a new color for 1991.

12 FROST WHITE

19 MIDNIGHT BLACK


26 SKY BLUE



37 WHEAT

44 EMERALD MET.




47 ROYAL BLUE MET.

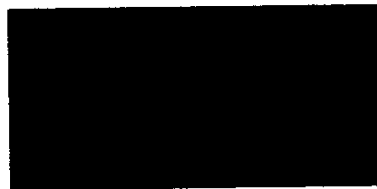


51 SEDONA TAN

72 APPLE RED

78 BURGUNDY MET.

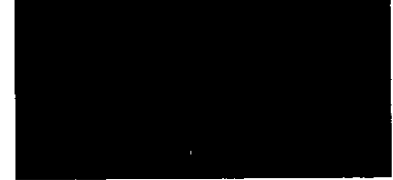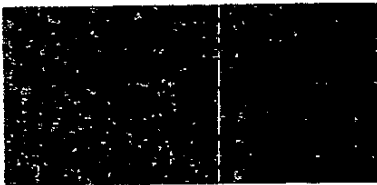

90 STEEL GRAY MET.

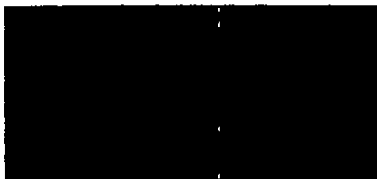



A SADDLE VINYL



B BLUE VINYL



C SADDLE CUSTOM VINYL



D BLUE CUSTOM VINYL



E GARNET CUSTOM VINYL



F GRAY CUSTOM VINYL



G SADDLE CUSTOM CLOTH



H BLUE CUSTOM CLOTH



I GARNET CUSTOM CLOTH



J GRAY CUSTOM CLOTH


TRIM, SEAT AND INTERIOR COLOR SELECTION

MODEL	110-IN. WHEELBASE	125-IN. WHEELBASE		146-IN. WHEELBASE	
TRIM (Code)	STANDARD	STANDARD	BEAUVILLE (E94)	STANDARD	BEAUVILLE (E94)
STANDARD SEAT (Code)	2 High-Back Bucket Seats and 1 Center Three-Passenger Bench Seat (**4)	2 High-Back Bucket Seats and 1 Center Three-Passenger Bench Seat (**4)	2 High-Back Bucket Seats and 1 Center Three-Passenger Bench Seat (**4)	2 High-Back Bucket Seats, 2 Center Three-Passenger Bench Seats and 1 Rear Four-Passenger Bench Seat (**4)	2 High-Back Bucket Seats, 2 Center Three-Passenger Bench Seats and 1 Rear Four-Passenger Bench Seat (**4)
OPTIONAL SEAT (Code)		2 High-Back Bucket Seats and 2 Center Three-Passenger Bench Seats (AQ3)	2 High-Back Bucket Seats and 2 Center Three-Passenger Bench Seats (AQ3)	2 High-Back Bucket Seats, 3 Center Three-Passenger Bench Seats and 1 Rear Four-Passenger Bench Seat (ZP3)	2 High-Back Bucket Seats, 3 Center Three-Passenger Bench Seats and 1 Rear Four-Passenger Bench Seat (ZP3)
		2 High-Back Bucket Seats and 1 Fold Out Travel Bed ² (w/B6S)	2 High-Back Bucket Seats and 1 Fold Out Travel Bed ² (w/B6S)		
		2 High-Back Bucket Seats, 1 Center Three-Passenger Bench Seat and 1 Fold Out Travel Bed ² (w/AQ3-B6S)	2 High-Back Bucket Seats, 1 Center Three-Passenger Bench Seat and 1 Fold Out Travel Bed ² (w/AQ3-B6S)		
		2 High-Back Bucket Seats, 2 Center Three-Passenger Bench Seats and 1 Rear Four-Passenger Bench Seat ¹ (AQ4)	2 High-Back Bucket Seats, 2 Center Three-Passenger Bench Seats and 1 Rear Four-Passenger Bench Seat ¹ (AQ4)		
Interior Color Availability	A Saddle Vinyl B Blue Vinyl C Saddle Custom Vinyl D Blue Custom Vinyl	A Saddle Vinyl B Blue Vinyl C Saddle Custom Vinyl D Blue Custom Vinyl	C Saddle Custom Vinyl D Blue Custom Vinyl E Garnet Custom Vinyl F Gray Custom Vinyl G Saddle Custom Cloth H Blue Custom Cloth I Garnet Custom Cloth J Gray Custom Cloth	A Saddle Vinyl B Blue Vinyl C Saddle Custom Vinyl D Blue Custom Vinyl	C Saddle Custom Vinyl D Blue Custom Vinyl F Gray Custom Vinyl G Saddle Custom Cloth H Blue Custom Cloth J Gray Custom Cloth
OPTIONAL SEAT (Code)			Reclining High-Back Bucket Seats (**6)		Reclining High-Back Bucket Seats (**6)
Interior Color Availability			G Saddle Custom Cloth H Blue Custom Cloth I Garnet Custom Cloth J Gray Custom Cloth		G Saddle Custom Cloth H Blue Custom Cloth J Gray Custom Cloth

¹ Standard on G30 Models w/7400 lb. GVWR, Optional on 8600 lb. GVWR

² Requires Blue or Saddle Custom Trim

SPORTVAN

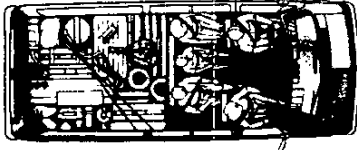

- HIGH-BACK BUCKET SEATS (DRIVER AND PASSENGER), 1 CENTER THREE-PASSENGER REMOVABLE BENCH SEAT

PASSENGER CAPACITY: 5

TRIM: Standard (Std); Beauville (E94)

AVAILABILITY: 110-in. wheelbase G10; 125-in. wheelbase G10, G20 and G30 w/C6P

ORDERING CODE: ***4

This seating arrangement is standard on 110-inch and 125-inch wheelbase models. The driver and passenger seats are foam-padded, high-back, adjustable bucket seats. The center seat is a removable three-passenger bench seat. The available trim for the Standard is Vinyl or Custom Vinyl. The Beauville (E94) features Custom Vinyl or Custom Cloth.



- HIGH-BACK BUCKET SEATS (DRIVER AND PASSENGER), 2 CENTER THREE-PASSENGER REMOVABLE BENCH SEATS AND 1 REAR FOUR-PASSENGER BENCH SEAT


PASSENGER CAPACITY: 12

TRIM: Standard (Std); Beauville (E94)

AVAILABILITY: 125-in. wheelbase G30

ORDERING CODE: AQ4

This seating arrangement is standard on the 125-inch G30 without C6P and optional on G30 with C6P. Seating includes 2 high-back bucket seats, 2 center three-passenger bench seats and 1 rear four-passenger bench seat. The available trim for Standard models is Vinyl or Custom Vinyl. The Beauville features Custom Vinyl or Custom Cloth.

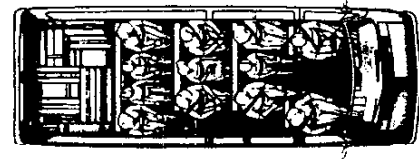

- HIGH-BACK BUCKET SEATS (DRIVER AND PASSENGER), 2 CENTER THREE-PASSENGER REMOVABLE BENCH SEATS, AND 1 REAR FOUR-PASSENGER BENCH SEAT

PASSENGER CAPACITY: 12

TRIM: Standard (Std); Beauville (E94)

AVAILABILITY: 146-in wheelbase G30

ORDERING CODE: ***4

This seating arrangement is standard on the 146-inch G30. Seating includes 2 foam padded, high-back adjustable front bucket seats, 2 three-passenger removable center bench seats and 1 rear four-passenger bench. The available trim for Standard models is Vinyl or Custom Vinyl. The Beauville features Custom Vinyl or Custom Cloth.



- HIGH-BACK BUCKET SEATS (DRIVER AND PASSENGER) AND 1 TRAVEL BED

PASSENGER CAPACITY: 5

TRIM: Standard (Std); Beauville (E94)

AVAILABILITY: 125-in. wheelbase G10; G20, G30

ORDERING CODE: B6S

This option features 2 foam padded, high-back adjustable front bucket seats and a travel bed. This is a bench seat that folds flat to form a sleeping surface. The available trim for Standard models is Vinyl or Custom Vinyl. The Beauville features Custom Vinyl or Custom Cloth.



- HIGH-BACK BUCKET SEATS (DRIVER AND PASSENGER) AND 2 CENTER THREE-PASSENGER REMOVABLE BENCH SEATS


PASSENGER CAPACITY: 8

TRIM: Standard (Std); Beauville (E94)

AVAILABILITY: 125-in. wheelbase G20 and G30

ORDERING CODE: AQ3

This option features 2 foam padded, high-back, adjustable front bucket seats and 2 three-passenger removable bench seats. The available trim for the Standard (Std) is Vinyl or Custom Vinyl. The Beauville (E94) features Custom Vinyl or Custom Cloth.

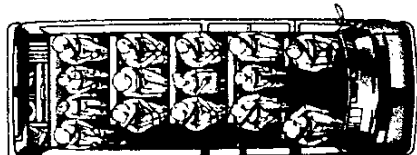

- HIGH-BACK BUCKET SEATS (DRIVER AND PASSENGER), 3 CENTER THREE-PASSENGER REMOVABLE BENCH SEATS, AND 1 FOUR-PASSENGER REAR BENCH SEAT

PASSENGER CAPACITY: 15

TRIM: Standard (Std); Beauville (E94)

AVAILABILITY: 146-in. wheelbase G30

ORDERING CODE: ZP3

This option features 2 foam padded, high-back, adjustable front bucket seats, 3 three-passenger removable bench seats and 1 rear four-passenger bench seat. The available trim for Standard models is Vinyl or Custom Vinyl. The Beauville features Custom Vinyl or Custom Cloth.

- HIGH-BACK RECLINING BUCKET SEATS (DRIVER AND PASSENGER)

PASSENGER CAPACITY: 5, 8, 12, 15

TRIM: Beauville (E94) only

AVAILABILITY: All models except 110-inch wheelbase model (CG11006)

ORDERING CODE: ***6

This option features 2 foam padded, reclining, high-back, adjustable front bucket seats with armrests. This option is available in Custom Cloth only.

SPECIAL TRAILERING PACKAGES

If you intend to tow a light trailer (up to 2000 lbs. gross weight) with your new Sportvan, a Special Trailing Package (RPO Z72) is highly recommended. RPO Z72 includes a deadweight hitch which is bolted to the rear bumper and undercarriage, and includes a 1 7/8"-diameter hitch ball. This package also includes a light-duty 5-wire wiring harness with a male-female connector and a pigtail that must be spliced to the trailer wiring harness. This allows the electrical system to activate trailer lights and other electrical systems.

If you intend to tow a medium trailer (2000 to 4000 lbs. gross weight) or a heavy trailer (4000 to 10,000 lbs. gross weight), heavy-duty Special Trailing Package RPO Z82 is recommended for medium trailers and is a required option for heavy trailers. (This Z82 option is also required, regardless of gross trailer weight, if your trailer tongue weight exceeds 400 lbs.) RPO Z82 includes a weight-distributing hitch platform which is bolted to the undercarriage and a heavy-duty 7-wire wiring harness that requires a connector. With either trailing package, the



wiring harness comes coiled and taped. The harnesses will be located under the body at center rear.

See the chart below for trailing options in addition to Special Trailing Packages. The chart below indicates, in **bold type**, the trailing equipment required for light, medium

and heavy trailer towing. Additional recommended options are also indicated. To help you in ordering, each column lists Regular Production Option (RPO) numbers.

Other important trailing information is available in the Owner's Manual of every 1991 Sportvan.

NOTE: Model and driveline combinations must be verified by your local dealer for correct emissions equipment.

REQUIRED/RECOMMENDED TRAILERING EQUIPMENT

Trailer Classification	Gas-Powered Sportvan						Diesel-Powered Sportvan						
	Light		Medium		Heavy		Light		Medium		Heavy		
Maximum Gross Trailer Weight (lbs.) ¹	2000		4000		6500 7500 10,000		2000		4000		5500 6500		
Maximum Tongue Load (lbs.)	200		500		800 900 1000		200		500		700 800		
Truck Series	G10 & G20	G30	G10 & G20	G30	G10	G20	G30	G20	G30	G20	G30	G20	G30
Special Trailing Package	Z72	Z72	Z82	Z82	Z82	Z82	Z82	Z72	Z72	Z82	Z82	Z82	Z82
5-Wire Wiring Harness (incl. in RPO Z72)	X	X	—	—	—	—	—	X	X	—	—	—	—
7-Wire Wiring Harness (incl. in RPO Z82)	—	—	X	X	X	X	X	—	—	—	—	X	X
Deadweight Hitch (incl. in RPO Z72)	X	X	—	—	—	—	—	X	X	—	—	—	—
Weight-Distributing Hitch Platform (incl. in RPO Z82)	—	—	X	X	X	X	X	—	—	—	—	X	X
Minimum Engine	—	—	—	—	—	—	—	—	—	—	—	X	X
Std. 4.3L (262 Cu. In.) V6 EFI	LB4	LB4	LB4	LB4	—	—	—	—	—	—	—	—	—
Opt. 5.0L (305 Cu. In.) V8 EFI	—	—	—	—	L03	L03	—	—	—	—	—	—	—
Opt. 5.7L (350 Cu. In.) V8 EFI	—	L05	—	L05	L05	L05	L05	—	—	—	—	—	—
Opt. 7.4L (454 Cu. In.) V8 EFI	—	—	—	—	—	—	L19	—	—	—	—	—	—
Std. 6.2L (379 Cu. In.) V8 Diesel	—	—	—	—	—	—	—	LH6	LL4	LH6	LL4	LH6	LL4
Automatic Transmission 4-Speed w/Overdrive	MX0	MX0	MX0	MX0	MX0	MX0	MX0	MX0	MX0	MX0	MX0	MX0	MX0
Minimum Rear Axle Ratio (to 1) w/Minimum Engines (Gross Trailer Weight, lbs.)	3.42	3.73	3.42	3.73	3.08 (5000) 3.42 (6000)	—	—	—	—	—	—	—	—
w/5.7L V8 Engine	—	3.23	—	3.23	3.08 (5500) 3.42 (6500) 3.73 (6500)	—	—	—	—	—	—	—	—
w/7.4L V8 Engine	—	—	—	—	3.42 (6500) 3.73 (7500) 4.10 (8000)	—	—	—	—	—	—	—	—
w/6.2L V8 Diesel	—	—	—	—	—	—	4.10 (10,000)	—	—	—	—	—	—
	—	—	—	—	—	—	—	3.08	3.73	3.42	3.73	3.73 (5500) 3.73 (5500) 4.10 (6500)	—
Engine Oil Cooler (incl. in RPO Z82)	KC4	KC4	KC4	KC4	KC4	KC4	KC4	STD	STD	STD	STD	STD	STD
Transmission Oil Cooler (incl. in RPO Z82)	—	—	V02	V02	V02	V02	V02	STD	STD	STD	STD	STD	STD
Heavy-Duty Radiator	V05	V05	—	V05	—	—	—	STD	STD	STD	STD	STD	STD
Electronic Speed Control and Comfortilt Steering Wheel	—	—	ZQ3	ZQ3	ZQ3	ZQ3	ZQ3	—	—	ZQ3	ZQ3	ZQ3	ZQ3

¹ If you order more than the minimum required equipment or carry more than two passengers, the additional weight must be subtracted from the maximum trailer weight.

HOW TO USE GCWRs TO DETERMINE POWERTRAIN AND REAR AXLE RATIO FOR TRAILERING

Perhaps you prefer to use Gross Combination Weight Ratings (GCWRs) to determine the engine, transmission and rear axle ratio you will require to tow a special trailer with your truck. The chart below allows you to do just that. It shows you the maximum allowable GCWR based on all the available truck engines and rear axle ratios with an

automatic transmission. **The GCWR includes the total loaded weight of both the truck and trailer.** Any available engine may be used for trailering if the GCWR shown is not exceeded. The trailer weight can be increased by 25% if the vehicle speed will not exceed 25 mph.

GROSS COMBINATION WEIGHT RATING (GCWR)																					
With Automatic Transmission																					
GCWR (lbs.)	6000	6500	7000	7500	8000	8500	9000	9500	10,000	10,500	11,000	11,500	12,000	12,500	13,500	14,000	14,500	15,000	16,000	19,000	
Engines	Rear Axle Ratios																				
4.3L (262) V6 Gas								3.42	3.73												
5.0L (305) V8 Gas								3.08		3.42		3.73									
5.7L (350) V8 Gas									3.08	3.23	3.42		3.73		4.10						
6.2L (379) V8 Diesel							3.08		3.42		3.73		4.10								
7.4L (454) V8 Gas															3.73					4.10	

When towing a trailer in excess of 4000 lbs. with a truck equipped with a 4-speed automatic transmission, it is recommended to shift to third gear range ("D") instead of overdrive ("O") for normal towing, and to manually downshift as required on uphill and downhill grades.
Note: Model and driveline combinations must be verified by your local dealer for correct emissions equipment.

GENERAL TRAILERING INFORMATION

AVAILABLE TRAILERING EQUIPMENT

Chevrolet offers a wide selection of available options for trailering and a few of them are described here.

LOAD-DISTRIBUTING PLATFORM

Required when towing trailers over 2000 lbs. Installs quickly and easily. (Dealer-installed accessory. See chart for part numbers.)

LIGHT-DUTY TRAILER HITCH

For hauling trailers up to 2000 lbs. with a maximum tongue load of 200 lbs. A 1 7/8" diameter ball is available as a dealer-installed accessory. See chart for part numbers.

HITCH BALLS

1 7/8" diameter ball is standard with light-duty hitches. It is also available as an accessory: Part No. 981148. A 2" diameter ball is also available for hitches as Part No. 980670.

WIRING HARNESES

5-wire used with trailers up to 2000 lbs. gross weight and 7-wire for larger trailers. Harnesses tie into vehicle's electrical system to give your trailer lights, plus electric brakes or battery charging.

TRUCK WIRING CODE

The following color code for trucks should be used when installing trailer wiring harnesses.

- **Blue.** Used for electric trailer brakes or auxiliary wiring.
- **Red.** Used for battery charging. Connects to starter solenoid. (7-wire harness only).
- **Light Green.** Backup lights (7-wire harness only).
- **Brown.** Taillight and running lights.
- **Yellow.** Left stop and turn signal.
- **Dark Green.** Right stop and turn signal.
- **White.** Ground.

MIRRORS

Trucks used as tow vehicles will require outside mirrors with extensions that exceed the width of the trailer to be towed. Optional mirrors with larger mounting brackets are available with all truck models.

COOLERS AND COOLING

Trailering creates higher-than-normal temperatures in coolant, engine and transmission oil. To help control these temperatures, consider the following separate options.

RPO V02. This is an extra-capacity heavy-duty automatic transmission oil cooler option. (Included in RPO Z82 Trailering Special Package.)

RPO KC4. This optional engine oil cooler circulates oil through a separate cooler mounted ahead of the radiator. (Included in RPO Z82 Trailering Package.)

DEALER-INSTALLED TRAILER HITCHES

Type of Hitch	Light Up to 2000 Lbs. 200-Lb. Tongue Load	Light/Medium Up to 2000 Lbs. 200-Lb. Tongue Load	Heavy Up to 6000 Lbs. 750-Lb. Tongue Load	Heavy Up to 7000 Lbs. 850-Lb. Tongue Load
Deadweight ¹		Rear Step Bumper ²	Weight-Distrib. Platform	Weight-Distrib. Platform
Sportvan	995742	995689-Painted	—	995745

¹ Deadweight hitch includes 1 7/8" ball.
² 1 7/8" ball for step-type bumper—Part No. 981148. 2" ball for step-type bumper—Part No. 980670.