




1991

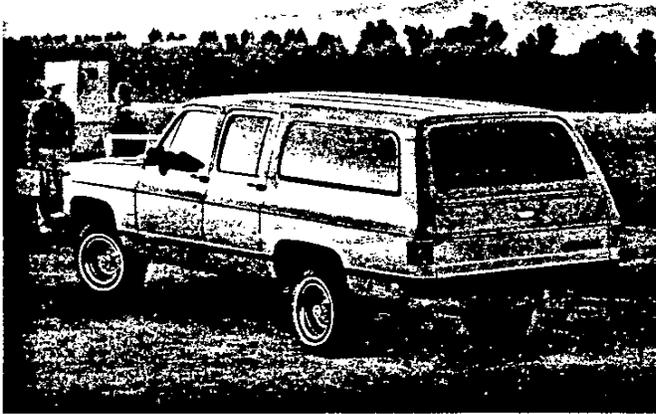

## CONTENTS


	<u>Page</u>
MODELS	2
SCOTTSDALE TRIM	4
SILVERADO (YE9) TRIM	5
POWERTRAINS	6
STANDARD SUSPENSION	8
OPTIONAL SUSPENSION	9
WHEELS AND TIRES	10
FRAME/STEERING/BRAKES	11
ELECTRICAL	12
COOLING	14
DIMENSIONS	15
OPTIONS	17
COLOR COMBINATIONS	19
EXTERIOR COLORS	B
INTERIOR TRIM	C
SEATS	D
TRAILERING	E

**✓ SUBURBAN**

Red print indicates Not Available in California

**TWO-WHEEL DRIVE MODELS**

**R1500 SUBURBAN**

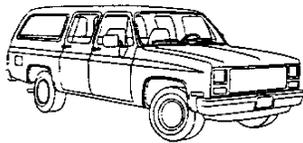

MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CR10906 <sup>2</sup>	129.5	6100	1560	2/3/5	5.7L V8/A4	—
CR10906/ B3J <sup>2</sup>	129.5	6400	1495	2/3/5	6.2L V8/A4	—
CR10906 <sup>3</sup>	129.5	6800	2260	2/3/5 6/8/9	5.7L V8/A4	—
CR10906/ B3J <sup>3</sup>	129.5	7000	2095	2/3/5 6/8/9	6.2L V8/A4	—

**R1500 SUBURBAN**

The R1500 Suburban is the base two-wheel drive Suburban model. It is offered with a choice of gasoline or diesel engines in two GVWRs. The Suburban is available with a choice of seating configurations, as well as a choice of panel rear doors or tailgate.

**R2500 SUBURBAN**




MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CR20906	129.5	8600	3628	2/3/5 6/8/9	5.7L V8/A4	7.4L V8/A4
CR20906/ B3J	129.5	8600	3319	2/3/5 6/8/9	6.2L V8/A4	—

**R2500 SUBURBAN**

The R2500 Suburban offers an 8600-lb. GVWR and expanded powertrain availability when compared to the R1500 Suburban series. It offers a choice of gasoline or diesel engines as well as panel rear doors or tailgate.

**FOUR-WHEEL DRIVE MODELS**

**V1500 SUBURBAN**

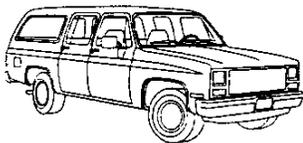

MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CV10906 <sup>2</sup>	129.5	6250	1348	2/3/5	5.7L V8/A4	—
CV10906/ B3J <sup>2</sup>	129.5	6800	1579	2/3/5	6.2L V8/A4	—
CV10906 <sup>3</sup>	129.5	7000	2098	2/3/5 6/8/9	5.7L V8/A4	—
CV10906/ B3J <sup>3</sup>	129.5	7300	2079	2/3/5/ 6/8/9	6.2L V8/A4	—

**V1500 SUBURBAN**

The V1500 Suburban is the base four-wheel drive Suburban model. It is offered with a choice of gasoline or diesel engines in two GVWRs. The V1500 Suburban is available with a choice of seating configurations, as well as a choice of panel rear doors or tailgate.

**V2500 SUBURBAN**



MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CV20906	129.5	8600	3338	2/3/5 6/8/9	5.7L V8/A4	—
CV20906/ B3J	129.5	8600	3029	2/3/5 6/8/9	6.2L V8/A4	—

**V2500 SUBURBAN**


The V2500 Suburban offers an 8600-lb. GVWR and a choice of gasoline or diesel powertrains. It offers a choice of panel rear doors or tailgate.

Based on Curb Weight. <sup>2</sup>Reqs. YFL/YFM/YES Tires. <sup>3</sup>Reqs. YHA/YHB Tires.

**R/V SUBURBAN SEATING**


**STANDARD: FRONT BENCH SEAT  
(\*\*1)**

A three-passenger front bench seat is standard. All other seats are optional.

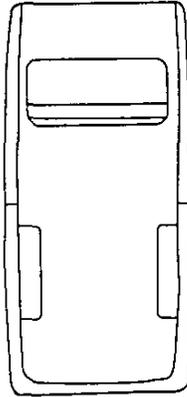


**OPTIONAL: RECLINING FRONT  
BUCKET SEATS (\*\*6)**

Two reclining front bucket seats with floor and roof console and folding armrests are optional on Silverado models only.

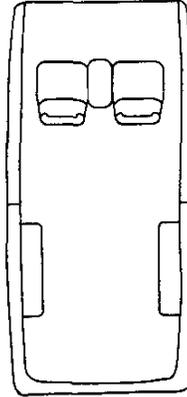


**OPTIONAL: FOLDING CENTER  
SEAT AND REMOVABLE REAR SEAT (AS3)**

A three-passenger center seat together with a three-passenger, removable rear seat are optional.

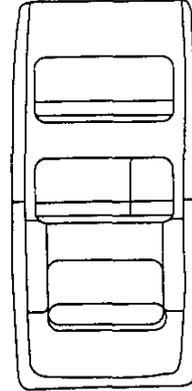

**OPTIONAL: FOLDING CENTER SEAT  
(AT5)**

A three-passenger, removable center seat is optional.

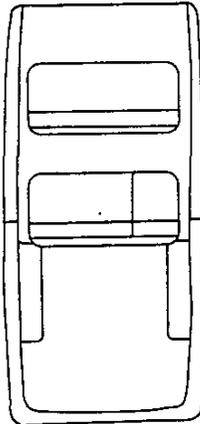

**REAR DOOR TYPES**

**STANDARD PANEL REAR DOORS  
(ZW9) OR OPTIONAL TAILGATE  
W/ELECTRIC WINDOW (E55)**

All Suburban models can be ordered with either standard panel rear doors or an optional tailgate with electric window.

# SCOTTSDALE

The Scottsdale trim level is the standard trim level for the R/V Suburban series. It is designed to offer truck buyers a high level of standard features when purchasing a standard level vehicle.

*The following features are standard.*



Some equipment shown may be optional or extra cost.

## POWERTRAIN/CHASSIS

- **ALTERNATOR:** 85 Amp Delcotron (gasoline engines); 100 Amp Delcotron (diesel engines).
- **BATTERY:** Gas engines—12 volt, negative ground; 630 CCA @ 0 degrees F. Diesel engines—Two 12 volt, negative ground batteries; 540 CCA @ 0 degrees F.
- **BRAKES:** Power; vacuum (gasoline models) Power; hydraulic (diesel models) Front—disc. Rear—drum. Includes rear wheel anti-lock system.
- **ENGINE:** 5.7-liter V8 EFI. R/V 1500 series produces 210 net hp @ 4000 rpm and 300 lb. ft. of net torque @ 2800 rpm. R/V

- 2500 series produces 190 net hp @ 4000 rpm and 300 lb. ft. of net torque @ 2400rpm. 6.2-liter V8 diesel with Mechanical Fuel Injection is available with B3J diesel equipment (see Powertrains for details).
- **EXHAUST:** Single.
- **FRAME:** All-welded ladder-type with a channel design and boxed front-end section.
- **FUEL TANK:** 37-gallon (approx.) capacity.
- **REAR AXLE:** Hypoid, Semi-Floating on all models.
- **SHOCK ABSORBERS:** Front and Rear—32 mm piston dia.
- **STABILIZER BAR:** Front—1.06 inch

dia. (standard on two-wheel drive). 1.25 inch dia. (standard on four-wheel drive).

- **STEERING:** Integral Power. Ratio—On Center/At Lock—19.4/17.7:1 (R1500 series). 19.5/17.8:1 (R2500 series). 17.6/13.1:1 (V1500 series). 17/13.5:1 (V2500 series).
- **SUSPENSION:** Front—Independent coil springs. (Tapered leaf springs on four wheel drive). Rear—Semi-Elliptic 2-Stage multi-leaf springs.
- **TRANSMISSION:** 4-speed automatic with overdrive and steering column mounted shift lever.

## EXTERIOR

- **BUMPER:** Chromed front and rear.
- **COLORS:** Choice of ten in solid paint scheme. See Color and Trim Specifications for details.
- **DRIP MOLDINGS:** Body color over side and rear doors.
- **GRILLE:** Molded plastic and front lamp bezels painted light and dark argent.

- **HEADLAMPS:** Single rectangular halogen.
- **HORN:** Dual high-note and low-note.
- **MIRRORS:** RH and LH below-eye-line type. Head size is 6.5" x 9.0".
- **NAMEPLATES:** Scottsdale.
- **TAILGATE:** Double wall constructed with power-operated window.
- **TIRES:** Five (including spare) steel-belted

radials (sizes vary with model. See Wheels and Tires for details.)

- **TOW HOOKS:** Front on all four-wheel drive models.
- **WHEELS:** Four silver painted steel (15" x 6.0" on R/V1500 and 16" x 6.5" on R/V2500).

## INTERIOR

- **ARMRESTS:** RH and LH padded integral with front and rear door panels.
- **CIGARETTE LIGHTER:** With fiber optic illuminated ashtray.
- **COAT HOOKS:** LH and RH in rear.
- **COLORS:** Choice of four. Blue, Garnet, Saddle, or Gray.
- **DOME LAMP:** Front and rear door-operated.
- **DOOR PANELS:** Color-keyed molded plastic.
- **DOOR SILL PLATES:** Full-length bright, for front and rear side doors.
- **FLOOR COVERINGS:** Color-keyed embossed mats for entire area.
- **GAGES:** Include speedometer, odometer with trip odometer, fuel level, voltmeter, oil pressure, engine temperature, and additional telltale lights.

- **HEADLAMP WARNING BUZZER.**
- **HEADLINER:** Full-length, color-keyed molded plastic with matching retainer moldings and assist handles at all front and center passenger seating positions.
- **HEATER:** Deluxe outside-air type with windshield and side window defoggers.
- **INSULATION:** On dash panel, on floor panel, under cowl panel and on headliner.
- **MAP LIGHT.**
- **MIRRORS:** 10-inch rearview.
- **RADIO:** AM with one 4"x10" center front dash mounted speaker, and fixed mast antenna. (Please refer to the Delco Electronics Brochure in RPO Detail for further information.)
- **SEATS:** Front 3-pass. bench-type with vinyl pigskin-grained trim.


- **SPARE TIRE/WHEEL:** Full size; located on LH rear side on R/V 1500 models only. (Optional on R/V 2500 models.)
- **SPARE TIRE CARRIER:** With color-keyed carpet tire cover on LH rear side. (R/V1500 series models; included on R/V2500 series models with optional spare tire.)
- **STEERING WHEEL:** 2-spoke.
- **STOWAGE BOX:** RH side of instrument panel.
- **SUNSHADES:** Padded, color-keyed RH and LH.
- **TOOLS:** Includes mechanical jack and wheel wrench located on LH rear side.
- **WINDOWS:** Tinted glass on all windows including shade band on upper part of windshield.
- **WINDSHIELD WIPERS:** Intermittent.

# SILVERADO

## (YE9)

The Silverado trim level is an optional trim level for the R/V Suburban series. It is designed to offer truck buyers an increased level of comfort and convenience features compared to the standard Scottsdale trim level.

*The following features are standard. Bold type denotes equipment in addition to or replacing that of the standard Scottsdale trim level.*

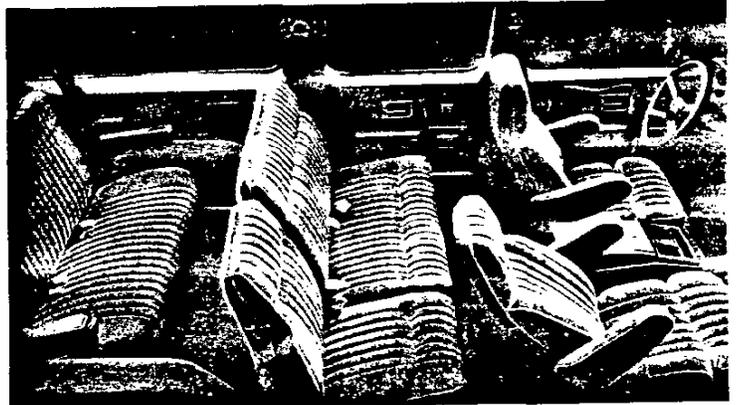

Some equipment shown may be optional or extra cost.

### POWERTRAIN/CHASSIS

- **ALTERNATOR:** 85 Amp Delcotron (gasoline engines); 100 Amp Delcotron (diesel engines).
- **BATTERY:** Gas engines—12 volt, negative ground; 630 CCA @ 0 degrees F. Diesel engines—Two 12 volt, negative ground batteries; 540 CCA @ 0 degrees F.
- **BRAKES:** Power; vacuum (gasoline models) Power; hydraulic (diesel models) Front—disc. Rear—drum. Includes rear-wheel anti-lock system.
- **ENGINE:** 5.7-liter V8 EFI. R/V 1500 series produces 210 net hp @ 4000 rpm and 300 lb. ft. of net torque @ 2800 rpm. R/V

- 2500 series produces 190 net hp @ 4000 rpm and 300 lb. ft. of net torque @ 2400 rpm.
- 6.2-liter V8 diesel with Mechanical Fuel Injection is available with B3J diesel equipment (see Powertrains for details).
- **EXHAUST:** Single.
- **FRAME:** All-welded ladder-type with a channel design and boxed front-end section.
- **FUEL TANK:** 37-gallon (approx.) capacity.
- **REAR AXLE:** Hypoid, Semi-Floating on all models.
- **SHOCK ABSORBERS:** Front and Rear—32 mm piston dia.

- **STABILIZER BAR:** Front—1.06 inch dia. (standard on two-wheel drive). 1.25 inch dia. (standard on four-wheel drive).
- **STEERING:** Integral Power. Ratio—On Center/At Lock—19.4/17.7:1 (R1500 series). 19.5/17.8:1 (R2500 series). 17.6/13.1:1 (V1500 series). 17/13.5:1 (V2500 series).
- **SUSPENSION:** Front—Independent coil spring. (Tapered leaf springs on four-wheel drive). Rear—Semi-Elliptic 2-Stage Multi-leaf springs.
- **TRANSMISSION:** 4-speed automatic with overdrive and steering column mounted shift lever.

### EXTERIOR

- **BUMPER:** Chromed front and rear with guards and black rub strips (front rub strip has a bright trim and rear rub strip has integral step pad).
- **COLORS:** Choice of ten in a solid paint scheme. See Color and Trim Specifications for details.
- **DRIP MOLDINGS:** Body color over side and rear.
- **GRILLE:** Molded plastic and front lamp bezels painted dark argent with chrome trim.

- **HEADLAMPS:** Dual rectangular halogen.
- **HORN:** Dual high-note and low-note.
- **LAMP:** Underhood, reel-type.
- **MIRRORS:** RH and LH below-eye-line type. Head size is 6.5" x 9.0".
- **MOLDINGS:** Deluxe package includes black body side and rear with bright trim and bright wheel opening.
- **NAMEPLATES:** Silverado
- **TRIM:** Bright front side marker lamp and taillamp.

- **TAILGATE:** Double wall constructed with power-operated window.
- **TIRES:** Five (including spare) steel-belted radials. (sizes vary with model. See Wheels and Tires for details.)
- **TOW HOOKS:** Front on all four-wheel drive models.
- **WHEELS:** Four silver painted steel (15" x 6.0" on R/V1500 and 16"x6.5" on R/V2500).
- **WHEEL COVERS:** Bright metal with black trim.

### INTERIOR

- **ARMRESTS:** Color-keyed RH and LH padded integral with front and rear door panels.
- **AUXILIARY LIGHTING.**
- **CIGARETTE LIGHTER:** With fiber optic illuminated ashtray.
- **COAT HOOKS:** LH and RH in rear with LH and RH hooks in third seat area.
- **COLORS:** Choice of four interior. Blue, Garnet, Saddle or Gray.
- **DOVE LAMP:** Front and rear door-operated with front dome reading lamp.
- **DOOR PANELS:** Vinyl with simulated woodgrain appliques, cloth inserts, and carpet trim. Front also has map pockets and door closing assist straps. Coordinated rear door/taillgate and rear sidewall trim panels are included.
- **DOOR SILL PLATES:** Full-length bright, for front and rear side doors.
- **FLOOR COVERINGS:** Consist of color-keyed front compartment carpeting (matching carpeting provided for center and rear seating areas including rear wheelhousing, with available center or

- center/rear seats).
- **FLOOR MATS:** Removable, color-keyed front and rear.
- **GAGES:** Include speedometer, odometer with trip odometer, fuel level, voltmeter, oil pressure, engine temperature, and additional telltale lights.
- **GLOVE BOX LIGHT.**
- **HEADLAMP WARNING BUZZER.**
- **HEADLINER:** Full-length, color-keyed foam-backed cloth with matching retainer moldings and assist handles at all front and center pass. seating positions.
- **HEATER:** Deluxe outside-air type with window defogger.
- **INSULATION:** On dash panel, on floor panel, under cowl panel and on headliner. Extra thick on body side trim panels.
- **INSTRUMENT PANEL:** Applique with woodgrain trim.
- **MAP LIGHT.**
- **MIRRORS:** 10-inch rearview.
- **POWER DOOR LOCKS.**
- **RADIO:** AM with one 4"x10" center front dash mounted speaker, and fixed mast antenna (Please refer to the Delco

- Electronics Brochure in RPO Detail for further information.)
- **SEATS:** Front 3-pass bench-type with textured velour Custom Cloth trim.
- **SPARE TIRE/WHEEL:** Full size; located on LH rear side on R/V 1500 models only. (Optional on R/V 2500 models.)
- **SPARE TIRE CARRIER:** With color-keyed carpet tire cover on LH rear side. (R/V1500 series models; included on R/V2500 series models with optional spare tire.)
- **STEERING WHEEL:** 4-spoke sport, with simulated leather.
- **STOWAGE BOX:** RH side of instrument panel.
- **SUNSHADES:** Padded, color-keyed RH and LH with flexible outboard ends and sliding extenders at inboard ends. LH has a storage strap. RH has an illuminated mirror.
- **TOOLS:** Includes mechanical jack and wheel wrench located on LH rear side.
- **WINDOWS:** Tinted glass on all including shade band on upper part of windshield.
- **WINDSHIELD WIPERS:** Intermittent.

**H/V SUBURBAN**

<b>TRANSMISSION</b>		
<b>MODEL</b>	<b>AUTOMATIC</b>	
	<b>AUTOMATIC 4-SPEED w/OVERDRIVE 4L80-E<sup>1</sup></b>	<b>AUTOMATIC 4-SPEED w/OVERDRIVE 700R4<sup>2</sup></b>
<b>RPO CODE</b>	MX0	MX0
<b>GEAR RATIOS</b>		
First	2.48	3.06
Second	1.48	1.63
Third	1.00	1.00
Fourth	0.75	0.70
Reverse	2.08	2.29
<b>GEAR TYPE</b>	Planetary	Planetary
<b>TORQUE CONVERTER</b>		
Element Types	Pump/Stator/Turbine	Pump/Stator/Turbine
Lock-up Clutch	—	Automatic
<b>LUBRICANT CAPACITY (pints)</b>		
Dry Fill	13.5	19
Refill	6	10

<b>TRANSFER CASE</b>	
<b>MODEL</b>	<b>NEW PROCESS 241</b>
<b>AVAILABILITY RATIOS</b>	V1500/V2500 1.00:1 2.72:1
<b>LEVER POSITIONS</b>	4-Lo (All-wheel Underdrive) N(Neutral) 2-Hi (Rear-wheel Drive) 4-Hi (All-wheel Drive)
<b>LEVER LOCATION</b>	Rear of Transmission at Center of Floor
<b>POWER TAKE-OFF DATA</b>	
Opening Location	—
<b>OIL CAPACITY (pints)</b>	10

<sup>1</sup>R models up to 8600 GVWR. <sup>2</sup>R models at 8600 GVWR and all V models.

KEY: S Standard O Optional Red Print Not Available w/California Emissions H High Altitude Emissions Only — Not Offered

<b>MODEL</b>	<b>ENGINE</b>	<b>TRANSMISSION</b>	<b>AXLES</b>					<b>GVWR</b>
			<b>ECONOMY — POWER</b>					
			3.08	3.42	3.73	4.10	4.56	
<b>R1500 SUBURBAN 4X2 R10906</b>	5.7 V8 (L05)	S	S	H	O <sup>1</sup>	—	—	6100
		S	S	O	O <sup>1</sup>	—	—	6800
	6.2L V8 (LH6) DIESEL	S	S	O <sup>2</sup>	H	—	—	6400
		S	S	O <sup>2</sup>	O <sup>1</sup>	—	—	7000
<b>R2500 SUBURBAN 4X2 R20906</b>	5.7L V8 (L05)	S	—	—	S	O <sup>3</sup>	O <sup>3</sup>	8600
	7.4L V8 (L19)	S	—	S	O	O	—	8600
	6.2L V8 (LL4) DIESEL	S	—	—	S	O	O	8600
<b>V1500 SUBURBAN 4X4 V10906</b>	5.7L V8 (L05)	S	—	S	O <sup>1</sup>	—	—	6250/7000
	6.2L V8 (LH6) DIESEL	S	—	S	O	—	—	6800/7300
<b>V2500 SUBURBAN 4X4 V20906</b>	5.7L V8 (L05)	S <sup>4</sup>	—	—	S	O <sup>3</sup>	—	8600
	6.2L V8 (LL4) DIESEL	S <sup>4</sup>	—	—	S	O	—	8600

<sup>1</sup>Requires Z82 Trailing. High Altitude Emissions Requires Z82 Trailing or KC4 Cooler.

<sup>2</sup>Standard Ratio with High Altitude Emissions.

<sup>3</sup>With C60 Air, Requires KC4 Cooler.






<sup>4</sup>Heavy Duty Transmission—8600 GVWR.

<b>AXLES</b>	<b>REAR</b>				<b>FRONT—FOUR-WHEEL DRIVE</b>									
	<b>MAKE AND CAPACITY (lbs.)</b>		GM 4000		GM 6000/6000 Full-Floating				GM 3600 Full-Floating		Dana 3800 Full-Floating			
<b>PINION &amp; RING GEAR</b>	Type		Hypoid		Hypoid				Hypoid		Hypoid			
Ratio	3.08	3.42	3.73	3.42	3.73	4.10	4.56	3.42	3.73	3.42	3.73	4.10		
Pinion Teeth	13	12	11	12	11	10	9	12	11	12	11	10		
Ring Gear Teeth	40	41	41	41	41	41	41	41	41	41	41	41		
Ring Gear Dia. (in.)	8.5	8.5	8.5	9.5/10.5				8.50	8.50	8.50	8.50	8.50		
<b>DIFFERENTIAL</b>	Type		2-Pinion Tapered Roller		2-Pinion/4-Pinion Tapered Roller				2-Pinion Tapered Roller		2-Pinion Tapered Roller			
Bearings, Type														
<b>AXLE SHAFTS</b>	Type		Semi-Floating Integral Shaft and Drive Flange		Semi-Floating/ Full-Floating Integral Shaft and Drive Flange				Full-Floating		Full-Floating			
Min. Diameter (in.)	—		—		—/1.34				—		—			
<b>HOUSING @ SPRING SEAT</b>	Section Diameter and Thickness (in.)		3.0 x .25		3.34 x .261/ 3.38 x 2.0				—		—			
<b>LUBRICANT CAPACITY (pints)</b>	—		—		—				4.5		4.5			

<sup>1</sup>Refer to suspension, page 8, for specific model availability.

**HORSEPOWER AND TORQUE RATINGS**

ENGINE	5.7L V8		7.4L V8	6.2L V8 DIESEL	6.2L V8 H.D. DIESEL
RPO CODE	L05		L19	LH6	LL4
RESTRICTIONS	UP TO 8500 Lbs. GVWR R/V1500 MODELS	8501-10,000 Lbs. GVWR R/V2500 MODELS	—	UP TO 8500 Lbs. GVWR	8501-10,000 Lbs. GVWR
CHART REFERENCE CODE	A	B	C	D	E
SAE NET HORSEPOWER Horsepower @ RPM	210 @ 4000	190 @ 4000	230 @ 3600	145 @ 3600	155 @ 3500
SAE NET TORQUE Lb. Ft. @ RPM	300 @ 2800	300 @ 2400	385 @ 1600	260 @ 1900	285 @ 2000
FUEL SYSTEM	EFI	EFI	EFI	Gear Driven Mechanical Fuel Injection	Gear Driven Mechanical Fuel Injection
CLUTCH SIZE (in.)	12	12	—	—	—
STD. BATTERY Cold Cranking Amps @ 0°F	630	630	630	2 @ 540 each	2 @ 540 each

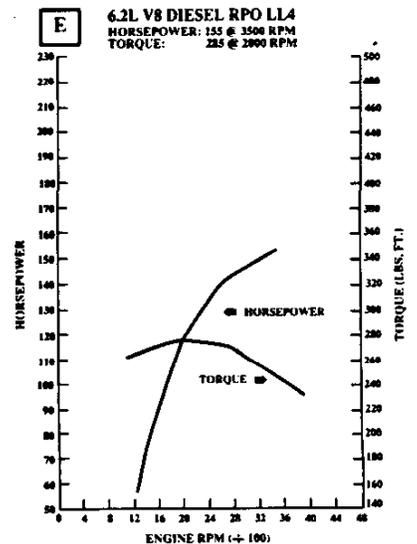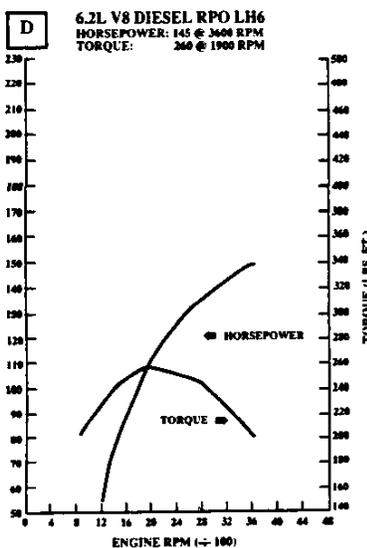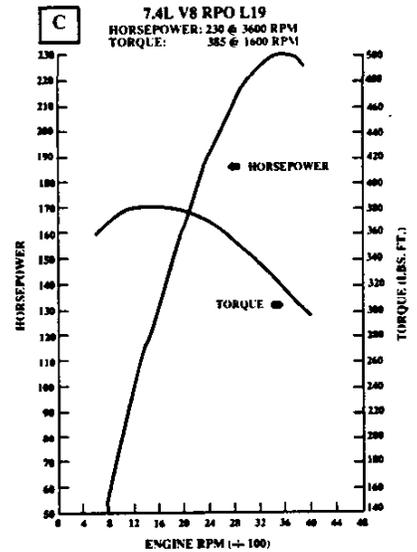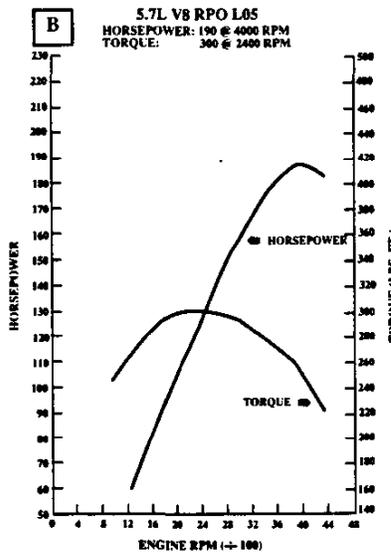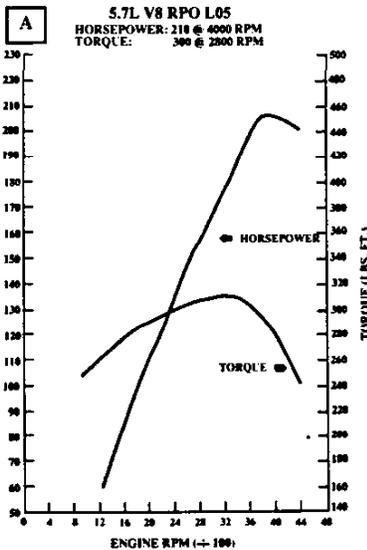

TWO-WHEEL DRIVE MODELS					FOUR-WHEEL DRIVE MODELS			
MODEL	R1500 SUBURBAN 4X2		R2500 SUBURBAN 4X2		V1500 SUBURBAN 4X4		V2500 SUBURBAN 4X4	
MODEL NUMBER	CR10906		CR20906		CV10906		CV20906	
	GAS	B3J	GAS	B3J	GAS	B3J	GAS	B3J
<b>STANDARD SUSPENSION</b>								
<b>PAYLOAD</b> (Max. lbs.) <sup>1</sup>	1560	1495	3628	3319	1348	1579	3338	3029
<b>GVWR</b> (lbs.)	6100	6400	8600	8600	6250	6800	8600	8600
<b>GAWR</b> (lbs.) Front	3250	3400	3800	3800	3526	3600	3800	3800
Rear	3686	3686	5600	5600	3686	3686	5600	5600
<b>FRONT SUSPENSION</b> Type	Independent Coil Spring	Independent Coil Spring	Independent Coil Spring	Independent Coil Spring	Tapered Leaf	Tapered Leaf	Tapered Leaf	Tapered Leaf
Standard Spring Capacity (Total lbs.)	3250	3400	3800	3800	3700	3800	3800	3800
Front Shock Absorbers Piston Diameter (mm)	32	32	32	32	32	32	32	32
Front Stabilizer Bar Diameter (in.)	1.06	1.06	1.06	1.06	1.25	1.25	1.25	1.25
<b>REAR SUSPENSION</b> Type	Semi-Elliptic 2-Stage Multi-Leaf							
Standard Spring Capacity (Total lbs.)	4000	4000	5600	5600	4000	4000	5600	5600
Leaves Per Spring	6	6	8	8	5	5	8	8
Leaf Tot. Thickness (in.)	2.19	2.19	2.93	2.93	2.26	2.26	2.93	2.93
Rear Shock Absorbers Piston Diameter (mm)	32	32	32	32	32	32	32	32
<b>FRONT AXLE</b> Type	—	—	—	—	Full- Floating	Full- Floating	Full- Floating	Full- Floating
Make	—	—	—	—	GM	GM	GM	GM
Maximum Capacity (lbs.)	3250	3400	3800	3800	3600	3600	3800	3800
Standard Hub Locks	—	—	—	—	Manual	Manual	Manual	Manual
Pinion/Ring Gear Type	—	—	—	—	Hypoid	Hypoid	Hypoid	Hypoid
<b>REAR AXLE</b> Type	Semi-Floating	Semi-Floating	Semi-Floating <sup>2</sup>	Semi-Floating <sup>2</sup>	Semi-Floating	Semi-Floating	Semi-Floating	Semi-Floating
Make	GM							
Maximum Capacity (lbs.)	4000	4000	6000	6000	4000	4000	6000	6000
Pinion/Ring Gear Type	Hypoid							
<b>STANDARD TIRES</b>	Tubeless SBR P235/75R15	Tubeless SBR P235/75R15	Tubeless SBR LT235/ 85R16E	Tubeless SBR LT235/ 85R16E	Tubeless SBR P235/75R15	Tubeless SBR P235/75R15	Tubeless SBR LT235/ 85R16E	Tubeless SBR LT235/ 85R16E
Capacity (lbs.)	1763/1843	1763/1843	2030/2905	2030/2905	1763/1843	1763/1843	2030/2905	2030/2905
Front/Rear	32/35	32/35	45/75	45/75	32/35	32/35	45/75	45/75
Inflation (psi) maximum	722	722	653	653	722	722	653	653
Revolutions per mile @ 45 mph								
<b>WHEELS</b> Size (in.) Front/Rear	15.0 x 6.00	15.0 x 6.00	15.0 x 6.50	15.0 x 6.50	15.0 x 6.00	15.0 x 6.00	16.0 x 6.50	16.0 x 6.50
Capacity (lbs.)	1984	1984	3045	3045	1984	1984	3045	3045
Bolt Holes	5	5	8	8	6	6	8	8
Bolt Circle Diameter (in.)	5	5	6.5	6.5	5	5	6.5	6.5
Offset (mm)	0	0	17	17	0	0	17	17

<sup>1</sup>Based on Curb Weight. <sup>2</sup>w/L19 Reqs. Full-Floating 6000-lb. Cap. Rear Axle.

		TWO-WHEEL DRIVE MODELS				FOUR-WHEEL DRIVE MODELS			
MODEL		R1500 SUBURBAN		R2500 SUBURBAN		V1500 SUBURBAN		V2500 SUBURBAN	
MODEL NUMBER		CR10906		CR20906		CV10906		CV20906	
		GAS	B3J	GAS	B3J	GAS	B3J	GAS	B3J
<b>OPTIONAL SUSPENSION</b>									
<b>OPTION</b>		YHA/YHB Tires	YHA/YHB Tires	—	—	YHA/YHB Tires	YHA/YHB Tires	—	—
<b>PAYLOAD</b> (Max. lbs.) <sup>1</sup>		2259	2094	—	—	2097	2078	—	—
<b>GVWR</b> (lbs.)		6800	7000	—	—	7000	7300	—	—
<b>GAWR</b> (lbs.) Front		3250	3400	—	—	3600	3600	—	—
Rear		3968	3968	—	—	3968	3968	—	—
<b>FRONT SUSPENSION</b>									
Type		Independent Coil Spring	Independent Coil Spring	—	—	Tapered Leaf	Tapered Leaf	—	—
Standard Spring Capacity (Total lbs.)		3250	3400	—	—	3700	3800	—	—
Front Shock Absorbers Piston Diameter (mm)		32	32	—	—	32	32	—	—
Front Stabilizer Bar Diameter (in.)		1.06	1.06	—	—	1.25	1.25	—	—
<b>REAR SUSPENSION</b>									
Type		Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	—	—	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	—	—
Standard Spring Capacity (Total lbs.)		4000	4000	—	—	4000	4000	—	—
Leaves Per Spring		6	6	—	—	6	6	—	—
Leaf Tot. Thickness (in.)		2.19	2.19	—	—	2.19	2.19	—	—
Rear Shock Absorbers Piston Diameter (mm)		32	32	—	—	32	32	—	—
<b>FRONT AXLE</b>									
Type		—	—	—	—	Full-Floating GM	Full-Floating GM	—	—
Make		—	—	—	—	3600	3600	—	—
Maximum Capacity (lbs.)		3250	3400	—	—	Manual	Manual	—	—
Standard Hub Locks		—	—	—	—	Hypoid	Hypoid	—	—
Pinion/Ring Gear Type		—	—	—	—	—	—	—	—
<b>REAR AXLE</b>									
Type		Semi-Floating GM	Semi-Floating GM	—	—	Semi-Floating GM	Semi-Floating GM	—	—
Make		4000	4000	—	—	4000	4000	—	—
Maximum Capacity (lbs.)		Hypoid	Hypoid	—	—	Hypoid	Hypoid	—	—
Pinion/Ring Gear Type		—	—	—	—	—	—	—	—
<b>STANDARD TIRES</b>									
Type		Tubeless SBR P235/75R15 XL	Tubeless SBR P235/75R15 XL	—	—	Tubeless SBR P235/75R15 XL	Tubeless SBR P235/75R15 XL	—	—
Capacity (lbs)		1763/1984	1763/1984	—	—	1843/1984	1843/1984	—	—
Front/Rear		32/41	32/41	—	—	35/41	35/41	—	—
Inflation (psi) maximum		722	722	—	—	722	722	—	—
Revolutions per mile @ 45 mph		—	—	—	—	—	—	—	—
<b>WHEELS</b>									
Size (in.) Front/Rear		15.0 x 6.00	15.0 x 6.00	—	—	15.0 x 6.00	15.0 x 6.00	—	—
Capacity (lbs.)		1984	1984	—	—	1984	1984	—	—
Bolt Holes		5	5	—	—	5	5	—	—
Bolt Circle Diameter (in.)		5	5	—	—	5	5	—	—
Offset (mm)		0	0	—	—	0	0	—	—

<sup>1</sup>Based on Curb Weight.

# R/V SUBURBAN

WHEELS AND TIRES

KEY: -- Not Available  
 AS - All-Season  
 SBR - Steel-Belted Radial Ply  
 BW - Blackwall  
 WW - Whitewall  
 WL - White Lettered  
 HWY - Highway  
 ON-OFF - On-Off Road  
 WOL - White Outline Lettered

TIRE SIZE	TYPE	RPO	PLY	LOAD RANGE	TIRE CAPACITY (lbs.)	INFLATION (psi) max.	WHEEL SIZE (in.)	WHEEL CAPACITY (lbs.)	BOLT HOLES	BOLT CIRCLE dia. (in.)	OFFSET (mm)	REV.PER mile @ 45 mph
P235/75R15	AS/SBR/BW Front Rear Spare	XES YES ZES	—	Std	1843	35	15.0x6.00	1984	5	5	0	722
P235/75R15	AS/SBR/BW Front Rear Spare	XFL YFL ZFL	—	Std	1843	35	15.0x6.00	1984	5	5	0	722
P235/75R15	AS/SBR/WW Front Rear Spare	XFM YFM ZFM	—	Std	1843	35	15.0x6.00	1984	5	5	0	722
P235/75R15XL	AS/SBR/WW Front Rear Spare	XHA YHA ZHA	—	XL	1984	41	15.0x6.00	1984	5	5	0	722
P235/75R15XL	AS/SBR/WW Front Rear Spare	XHB YHB ZHB	—	XL	1984	41	15.0x6.00	1984	5	5	0	722
LT235/85R16E	ON-OFF SBR/BW Front Rear Spare	XYT YYT ZYT	10	E	2905	75	16.0x6.50	3045	8	6.5	17	653
LT235/85R16E	HWY SBR/BW Front Rear Spare	XYN YYN ZYN	10	E	2905	75	16.0x6.50	3045	8	6.5	17	653

## OPTIONAL WHEELS

RPO	DESCRIPTION	WHEEL SIZE (in.)	CAPACITY (lbs.) ea.	BOLT HOLES	BOLT CIRCLE dia. (in.)	OFFSET (mm)
N67 <sup>1</sup>	Wheels—Rally (Adds Trim Rings and Special Hub Caps)	15 x 8.0	3045	5/6	5.0/5.5	127
N90 <sup>1</sup>	Wheels—Aluminum, Cast (Includes 15.0 x 7.0 Wheels and Special Hub Caps)	15 x 7.0	1843	5/6	5.0/5.5	13

<sup>1</sup> R/V 10906 Models Only.

TWO-WHEEL AND FOUR-WHEEL DRIVE MODELS												
MODEL	R1500 SUBURBAN				R2500 SUBURBAN				V1500 SUBURBAN		V2500 SUBURBAN	
MODEL NUMBER	CR10906				CR20906				CV10906		CV20906	
	GAS		B3J		GAS		B3J		GAS	B3J	GAS	B3J
<b>FRAME</b>												
Side Rail Dimensions Width (in.)	2.30	2.30	2.30	2.30	2.30	2.30	2.30	2.30	2.30	2.30	2.30	
Depth (in.)	5.92	5.92	5.92	5.92	5.92	5.92	5.92	5.92	5.92	5.92	5.92	
Thickness (in.)	.154	.154	.192	.192	.177	.177	.192	.192	.177	.177	.192	
Section Modulus Rails only (cu. in.)	3.10	3.10	3.88	3.88	3.57	3.57	3.88	3.88	3.57	3.57	3.88	
RBM of Frame (lb. in.)	120,900	120,900	151,320	151,320	139,230	139,230	151,320	151,320	139,230	139,230	151,320	
Width Over Rails Front (in.)	28.01	28.01	28.09	28.09	28.09	28.09	28.09	28.09	28.09	28.09	28.09	
Rear (in.)	33.95	33.95	34.03	34.03	34.03	34.03	34.03	34.03	34.03	34.03	34.03	
Overall Length of Rail (in.)	215.86	215.86	215.86	215.86	215.86	215.86	215.86	215.86	215.86	215.86	215.86	
<b>STEERING</b>												
Type	Var. Ratio Integral Power	Var. Ratio Integral Power	Var. Ratio Integral Power									
Steering Ratio On Center/At Lock	19.4/17.7:1	19.4/17.7:1	19.5/17.8:1	19.5/17.8:1	17.6/13:1	17.6/13:1	17.6/13:1	17.6/13:1	17.6/13:1	17.6/13:1	17/13.5:1	
Turning Diameter Curb-To-Curb (ft.) Wall-To-Wall (ft.)	46.1 48.5	46.1 48.5	49.3 54.1	49.3 54.1	43.9 46.2	43.9 46.2	43.9 46.2	43.9 46.2	43.9 46.2	43.9 46.2	43.9 46.2	
<b>BRAKES</b>												
GVWR (lbs.)	6100	6800	6400	7000	8600	8600	6250	7000	6800	7300	8600	8600
Type Rear-Wheel Anti-Lock Braking System	Vac. Power Front Disc/ Rear Drum		Hyd. Power Front Disc/ Rear Drum		Vac. Power Front Disc/ Rear Drum		Hyd. Power Front Disc/ Rear Drum		Vac. Power Front Disc/ Rear Drum		Hyd. Power Front Disc/ Rear Drum	
Booster Diaphragm Diameter (in.)	9.5 x 8.0 Tandem		—		9.5 x 8.0 Tandem		—		9.5 x 8.0 Tandem		—	
Front Rotor Size Diameter x Thickness (in.)	11.86 x 1.29		11.86 x 1.29		12.50 x 1.28		12.50 x 1.28		11.86 x 1.29		11.86 x 1.29	
Front Facing Contact Per Axle (sq. in.)	37.63		37.63		42.98		42.98		37.63		37.63	
Rear Drum Size Diameter x Width (in.)	11.15 x 2.75		11.15 x 2.75		13.0 x 2.5		13.0 x 2.5		11.15 x 2.75		11.15 x 2.75	
Rear Facing Contact Per Axle (sq. in.)	107.42		107.42		116.73		116.73		107.42		107.42	
Parking Brake Type	Cable To Rear Wheels		Cable To Rear Wheels									

V SUBURBAN

TWO-WHEEL DRIVE MODELS

FOUR-WHEEL DRIVE MODELS

MODEL	R1500 SUBURBAN		R2500 SUBURBAN		V1500 SUBURBAN		V2500 SUBURBAN	
	CR10906		CR20906		CV10906		CV20906	
	GAS	B3J	GAS	B3J	GAS	B3J	GAS	B3J




**ELECTRICAL**

ENGINE	5.7L V8	6.2L V8	5.7L V8	7.4L V8	6.2L V8	5.7L V8	6.2L V8	5.7L V8	6.2L V8
<b>STANDARD BATTERY</b> Cold Cranking Amps @ 0 °F @ - 20 °F Reserve Capacity Minutes @ 80°F	630 470 115	Two With 540 Each 405 Each 115 Each	630 470 115	630 470 115	Two With 540 Each 405 Each 115	630 470 115	Two With 540 Each 405 Each 115 Each	630 470 115	Two With 540 Each 405 Each 115 Each
<b>STANDARD ALTERNATOR</b> Max. Capacity (Amps) Max. Watts @ 12 Volts Nominal Amp @ Idle approximately Drive Pulley Ratio Model Number	85 1020 30 3.2:1 CS130	100 1200 54 3.0:1 CS130	85 1020 30 3.2:1 CS130	85 1020 30 3.2:1 CS130	100 1200 54 3.0:1 CS130	85 1020 30 3.2:1 CS130	100 1200 54 3.0:1 CS130	85 1020 30 3.2:1 CS130	100 1200 54 3.0:1 CS130
<b>OPTIONAL ALTERNATOR<sup>1</sup></b> Max. Capacity (Amps) Max. Watts @ 12 Volts Nominal Amp @ Idle approximately Drive Pulley Ratio Model Number	w/C60 100 1200 54 3.2:1 CS130	— — — — —	w/C69 100 1200 54 3.2:1 CS130	w/C60 100 1200 54 3.2:1 CS130	— — — — —	w/C60 100 1200 54 3.2:1 CS130	— — — — —	w/C60 100 1200 54 3.2:1 CS130	— — — — —
<b>OPTIONAL ALTERNATOR<sup>1</sup></b> Max. Capacity (Amps) Max. Watts @ 12 Volts Nominal Amp @ Idle approximately Drive Pulley Ratio Model Number	w/C69 105 1260 63 3.2:1 CS130	— — — — —	w/C69 105 1260 63 3.2:1 CS130	w/C69 105 1260 63 3.2:1 CS130	— — — — —	w/C69 105 1260 63 3.2:1 CS130	— — — — —	w/C36 105 1260 63 3.2:1 CS130	— — — — —
<b>OPTIONAL ALTERNATOR<sup>1</sup></b> Max. Capacity (Amps) Max. Watts @ 12 Volts Nominal Amp @ Idle approximately Drive Pulley Ratio Model Number	w/C36 or C49 w/o C69 100 1200 54 3.2:1 CS130	— — — — —	w/C69 or C49 w/o C69 100 1200 54 3.2:1 CS130	w/C69 or C49 w/o C69 100 1200 54 3.2:1 CS130	— — — — —	w/C69 or C49 w/o C69 100 1200 54 3.2:1 CS130	— — — — —	w/C69 or C49 w/o C69 100 1200 54 3.2:1 CS130	— — — — —
<b>OPTIONAL ALTERNATOR<sup>1</sup></b> Max. Capacity (Amps) Max. Watts @ 12 Volts Nominal Amp @ Idle approximately Drive Pulley Ratio Model Number	w/C36 and C49 w/o C69 105 1260 63 3.2:1 CS130	— — — — —	w/C36 and C49 w/o C69 105 1260 63 3.2:1 CS130	w/C36 and C49 w/o C69 105 1260 63 3.2:1 CS130	— — — — —	w/C36 and C49 w/o C69 105 1260 63 3.2:1 CS130	— — — — —	w/C36 and C49 w/o C69 105 1260 63 3.2:1 CS130	— — — — —

<sup>1</sup>NOTE: This Alternator is Available Only as Part of Noted RPO.

# ALTERNATOR CURVES

Note: Refer to Electrical Charts for Model Application.

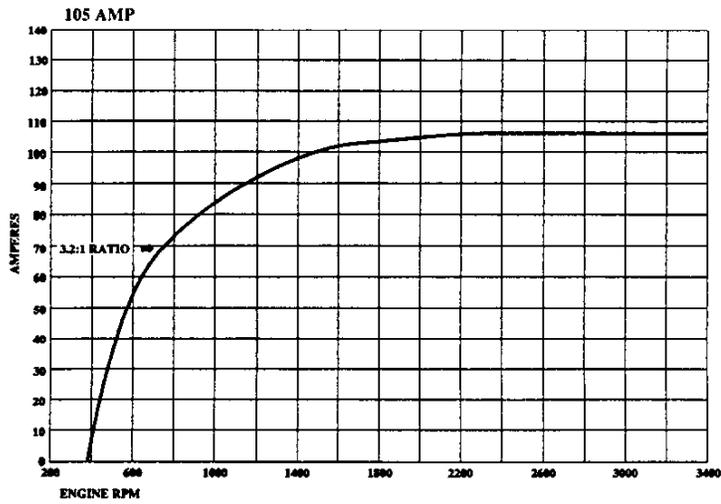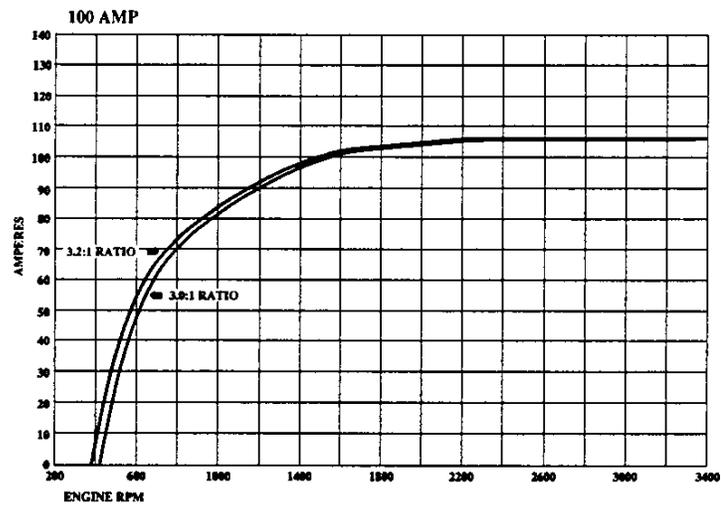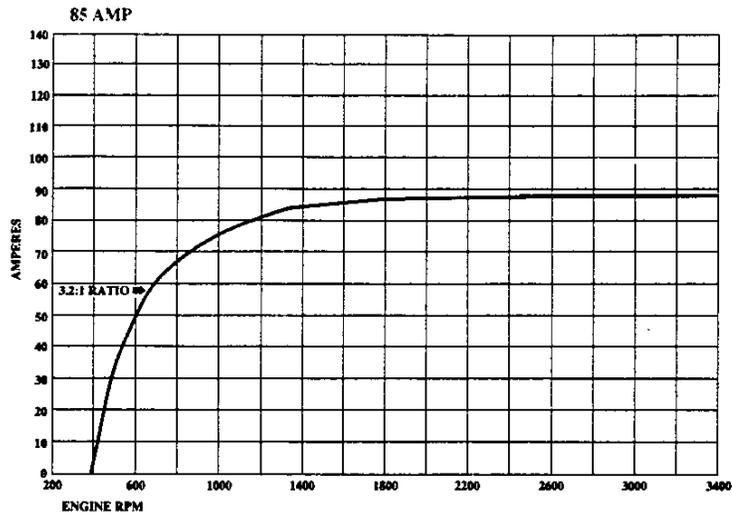

**TWO-WHEEL DRIVE MODELS**

**FOUR-WHEEL DRIVE MODELS**

MODEL	R1500 SUBURBAN	R2500 SUBURBAN	V1500 SUBURBAN	V2500 SUBURBAN
MODEL NUMBER	CR10906	CR20906	CV10906	CV20906

**STANDARD COOLING SYSTEM**


ENGINE	5.7L V8	6.2L V8 <sup>1</sup>	5.7L V8	7.4L V8	6.2L V8	5.7L V8	6.2L V8 <sup>1</sup>	5.7L V8	6.2L V8
Radiator Thickness (in.)	.98	1.57	1.57	2.17	1.57	1.57	1.57	1.57	1.57
System Cap. (gal.)	4.3	6.2	4.3	6.1	6.2	4.3	6.2	4.3	6.2
Fan-No. Blades x Diameter x Pitch (in.)	3 x 19 x 2.01	5 x 20 x 2.87	3 x 19 x 2.01	5 x 20 x 2.56	5 x 20 x 2.87	3 x 19 x 2.01	5 x 20 x 2.87	3 x 19 x 2.01	5 x 20 x 2.87

**OPTIONAL COOLING SYSTEMS**

<b>OPT. H.D. RADIATOR</b>	V01	—	V01	—	—	V01	—	V01	—
Radiator Thickness (in.)	1.57	—	1.57	—	—	1.57	—	1.57	—
Systems Cap. (gal.)	4.3	—	4.3	—	—	4.3	—	4.3	—
Fan-No. Blades x Diameter x Pitch (in.)	5 x 19.5 x 2.01	—	5 x 19.5 x 2.01	—	—	5 x 19.5 x 2.01	—	5 x 19.5 x 2.01	—
<b>OPT. AIR CONDITIONING</b>	C60	C60	C60	C60	C60	C60	C60	C60	C60
Radiator Thickness (in.)	1.57	1.57 <sup>3</sup>	1.57	2.17 <sup>4</sup>	1.97	1.57	2.17	1.57	1.97
System Cap. (gal.)	4.3	6.2	4.3	6.1	6.2	6.2	6.2	4.3	6.2
Fan-No. Blades x Diameter x Pitch (in.)	5 x 19.5 x 2.01	5 x 20 x 2.87	5 x 19.5 x 2.01	7 x 19.5 x 2.56	5 x 20 x 2.87	5 x 20 x 2.87	5 x 20 x 2.87	5 x 19.5 x 2.01	5 x 20 x 2.87
<b>OPT. H.D. RADIATOR AND TRANS. OIL COOLER</b>	V02 <sup>2</sup>	V02 <sup>2</sup>	V02 <sup>2</sup>	V02 <sup>2</sup>	V02 <sup>2</sup>	V02 <sup>2</sup>	V02 <sup>2</sup>	V02 <sup>2</sup>	V02 <sup>2</sup>
Radiator Thickness (in.)	1.57	1.57	1.57	2.17	1.97	1.57	1.57	1.57	1.97
System Cap. (gal.)	4.3	6.2	4.3	6.1	6.2	6.2	6.2	4.3	6.2
Fan-No. Blades x Diameter x Pitch (in.)	5 x 19.5 x 2.01	5 x 20 x 2.87	5 x 19.5 x 2.01	7 x 19.5 x 2.56	5 x 20 x 2.87	5 x 20 x 2.87	5 x 20 x 2.87	5 x 19.5 x 2.01	5 x 20 x 2.87

6.2 L Diesel N/A In California on RV1500 Models. <sup>1</sup>Included with Z82 Trailing. <sup>2</sup>2.17 with 3.42 and 3.73 Rear Axle Ratios. <sup>3</sup>1.57 with 3.42 and 3.73 Rear Axle Ratios.

		TWO-WHEEL DRIVE MODELS		FOUR-WHEEL DRIVE MODELS	
MODEL		R1500 SUBURBAN	R2500 SUBURBAN	V1500 SUBURBAN	V2500 SUBURBAN
MODEL NUMBER		CR10906	CR20906	CV10906	CV20906
<b>EXTERIOR DIMENSIONS</b>					
<b>BODY</b>					
Wheelbase (in.)	WB	129.5	129.5	129.5	129.5
Overall Length (in.)	OAL	219.1	219.1	219.1	219.1
Overall Height (in.) Nominal	OAH	72.0	74.3	73.8	76.1
Maximum Width (in.)	OAW	79.6	79.6	79.6	79.6
Bumper To Axle (in.)	BA				
Front		33.8	33.8	33.8	33.8
Rear		55.8	55.8	55.8	55.8
Ground to Top of Rear Load Floor (in.)	—	29.0	31.7	30.1	33.6
Ground Clearance (in.) Front/Rear	—	6.6/6.7	8.5/8.5	6.9/7.1	8.6/8.6
<b>SIGN PANEL AREA (in.)</b>	Shaded Area	22 x 72 1/4	22 x 72 1/4	22 x 72 1/4	22 x 72 1/4

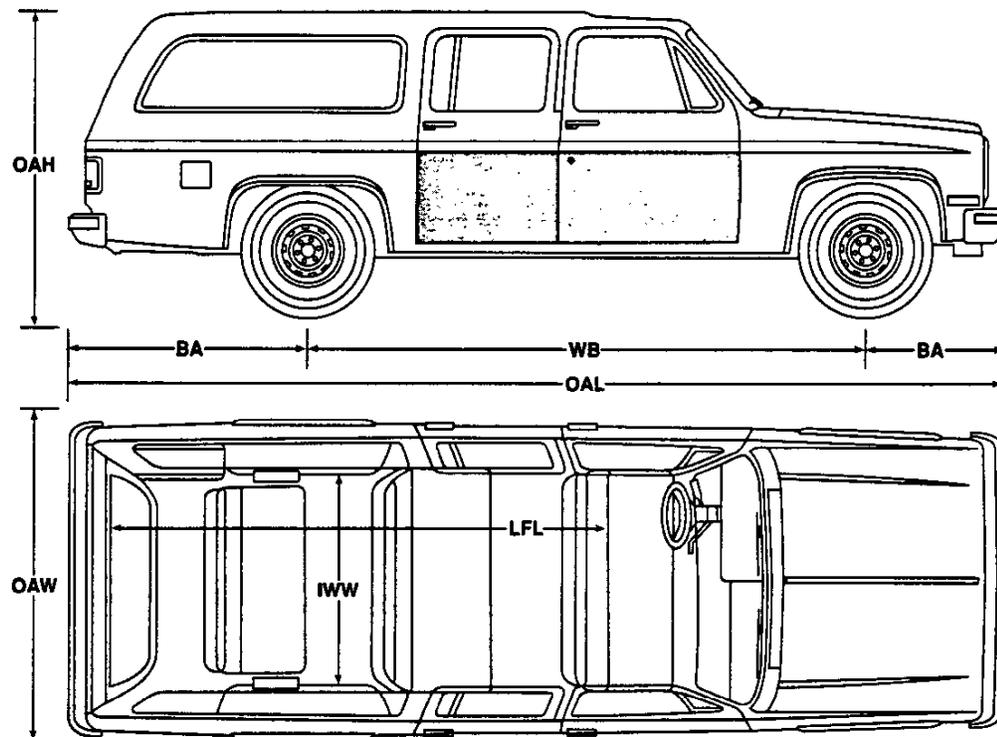

## V SUBURBAN

MODEL	R1500 SUBURBAN	R2500 SUBURBAN	V1500 SUBURBAN	V2500 SUBURBAN
MODEL NUMBER	CR10906	CR20906	CV10906	CV20906

## INTERIOR DIMENSIONS

Head Room (in.) Front/Middle/Rear	HR	40.5/41.1/39.1	40.5/41.1/39.1	40.5/41.1/39.1	40.5/41.1/39.1
Leg Room (in.) Front/Middle/Rear	LR	40.8/35.5/32.6	40.8/35.5/32.6	40.8/35.5/32.6	40.8/35.5/32.6
Shoulder Room (in.) Front/Middle/Rear	SR	65.4/66.0/66.0	65.4/66.0/66.0	65.4/66.0/66.0	65.4/66.0/66.0
Hip Room (in.) Front/Middle/Rear	HP	60.7/60.7/49.3	60.7/60.7/49.3	60.7/60.7/49.3	60.7/60.7/49.3
Cargo Volume (cu. ft.) w/Front Seat w/Front, Middle Seat w/Front, Middle, Rear Seats	CV	167.0 104.4 40.8	167.0 104.4 40.8	167.0 104.4 40.8	167.0 104.4 40.8
Load Floor Length (in.) w/Front Seat w/Front, Middle Seat w/Front, Middle, Rear Seats	LFL	111.0 74.7 32.4	111.0 74.7 32.4	111.0 74.7 32.4	111.0 74.7 32.4
Interior Width at Floor (in.)	—	66.0	66.0	66.0	66.0
Interior Width at Wheelhousing (in.)	IWW	50.0	50.0	50.0	50.0

## FUEL TANK

Standard Tank Nominal (gal.)	37.0'	37.0'	37.0'	37.0'
Location of Tank	Inboard Center Behind Rear Axle			
Location of Filler	Right Side (Rear)	Right Side (Rear)	Right Side (Rear)	Right Side (Rear)

Diesel Model Capacity Slightly Larger.

KEY S - Standard  
 O - Optional  
 — Not Available

1. R1500 (4x2) CR10906 ZW9 Panel Rear Doors  
 2. R1500 (4x2) CR10906 E55 Tailgate  
 3. R2500 (4x2) CR20906 ZW9 Panel Rear Doors  
 4. R2500 (4x2) CR20906 E55 Tailgate

5. V1500 (4x4) CV10906 ZW9 Panel Rear Doors  
 6. V1500 (4x4) CV10906 E55 Tailgate  
 7. V2500 (4x4) CV20906 ZW9 Panel Rear Doors  
 8. V2500 (4x4) CV20906 E55 Tailgate

NOTE: Refer to Dealer Order Guide for Updated Option Availability.

				MODELS							
				2-WHEEL DRIVE				4-WHEEL DRIVE			
				1	2	3	4	5	6	7	8
OPTION	CODE	DESCRIPTION	RESTRICTIONS								
AIR CONDITIONING Front	C60	Incl w/C69 Front/Rear Air		O	O	O	O	O	O	O	O
	C69	Incls C60 Front Air Conditioning		O	O	O	O	O	O	O	O
AXLE, REAR	G80	Locking Differential		O	O	O	O	O	O	O	O
COLD CLIMATE PACKAGE	V10	Incls Engine Block Heater	N/A B3J Diesel	O	O	O	O	O	O	O	O
CONVENIENCE PACKAGE Driver's	ZQ2	Incls Power Door Locks and Side Door Power Windows		O	O	O	O	O	O	O	O
	ZQ3	Incls Tilt Wheel and Speed Control		O	O	O	O	O	O	O	O
COOLING SYSTEM Engine Oil Radiator, Heavy-Duty	KC4 V01	Incl w/Z82 Trailing	N/A B3J Diesel N/A B3J Diesel N/A C60 Air.	O	O	O	O	O	O	O	O
	V02	Incl wZ82 Trailing	V02 Cooling, or C69 Air	O	O	O	O	O	O	O	O
DEFOGGER Rear Window	C49	Electric	w/ZW9 Reqs YE9 Silverado	O	O	O	O	O	O	O	O
DOOR LOCK SYSTEM, POWER	AU3	Side Doors Only	Incl w/ZQ2 or YE9 Silverado (w/ZW9-Incls All Doors)	O	O	O	O	O	O	O	O
ENGINES 5.7-liter V8 EFI 7.4-liter V8 EFI 6.2-liter V8 Diesel 6.2-liter V8 Diesel H.D.	L05	(See Powertrains)		S	S	S	S	S	S	S	S
	L19			—	—	O	O	—	—	O	O
	LH6	Below 8600-lb. GVWR	6.2-liter Diesel V8 N/A California w/1500 Series	O	O	—	—	O	O	—	—
	LL4	8600-lb. GVWR		—	—	O	O	—	—	O	O
GLASS	AJ1	Deep Tinted		O	O	O	O	O	O	O	O
HEATER	C36	Auxiliary, Rear		O	O	O	O	O	O	O	O
HUB, LOCKING	X6Z	Automatic		—	—	—	—	O	O	O	O
LAMPS, ROOF MARKER	U01		N/A YF5 California Emissions	O	O	O	O	O	O	O	O
MIRRORS, EXTERIOR Below-Eye-Line Type Camper Type Outside, Electric	D45	Stainless Steel (9" x 6.5")		O	O	O	O	O	O	O	O
	DF2	Stainless Steel (7.5" x 10.5")		O	O	O	O	O	O	O	O
	D48	Remote Electric	Avail Only w/YE9 and ZQ2	O	O	O	O	O	O	O	O
MOLDING	B93	Door Edge Guard		O	O	O	O	O	O	O	O
PAINT, EXTERIOR Solid Conventional Two-Tone Special Two-Tone Deluxe Two-Tone	ZY1	(See Color and Trim)		O	O	O	O	O	O	O	O
	ZY2			O	O	O	O	O	O	O	O
	ZY3			O	O	O	O	O	O	O	O
	ZY4			O	O	O	O	O	O	O	O
RADIO EQUIPMENT Electronically-Tuned AM/FM Stereo Radio w/Seek-Scan and Digital Clock Electronically-Tuned AM /FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape and Digital Clock Electronically-Tuned AM Stereo/FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape w/Search-Repeat, Graphic Equalizer and Digital Clock Radio Delete	UM7	14 Presets, Digital Display, Two 3.5" Front Speakers/2 4" x 10" Rear Speakers, 28 Watts Total Power Output.		O	O	O	O	O	O	O	O
	UM6	14 Presets, Digital Display, Two 3.5" Front Speakers/2 4" x 10" Rear Speakers, 28 Watts Total Power Output.		O	O	O	O	O	O	O	O
	UX1	14 Presets, Digital Display, Two 3.5" Front Speakers/2 4" x 10" Rear Speakers, 28 Watts Total Power Output.		O	O	O	O	O	O	O	O
	UL5			O	O	O	O	O	O	O	O

# R/V SUBURBAN

KEY S - Standard  
 O - Optional  
 — Not Available

1. R1500 (4x2) CR10906 ZW9 Panel Rear Doors  
 2. R1500 (4x2) CR10906 E55 Tailgate  
 3. R2500 (4x2) CR20906 ZW9 Panel Rear Doors  
 4. R2500 (4x2) CR20906 E55 Tailgate


5. V1500 (4x4) CV10906 ZW9 Panel Rear Doors  
 6. V1500 (4x4) CV10906 E55 Tailgate  
 7. V2500 (4x4) CV20906 ZW9 Panel Rear Doors  
 8. V2500 (4x4) CV20906 E55 Tailgate

NOTE: Refer to Dealer Order Guide for Updated Option Availability.

OPTION	CODE	DESCRIPTION	RESTRICTIONS	MODELS									
				2-WHEEL DRIVE				4-WHEEL DRIVE					
				1	2	3	4	5	6	7	8		
<b>SEATING</b> One of the Following Must Be Chosen: Center, Folding	AT5	Incl w/AS3 Center and Rear Seat; Incls Shoulder Belts		O	O	O	O	O	O	O	O	O	O
Center and Rear Seat	AS3	Incls AT5 Center Folding Seat; Available with or without Rear Seat Shoulder Belts	Reqs HA or HB Tires on R/V1500	O	O	O	O	O	O	O	O	O	O
Rear Seat Not Desired	YG4			O	O	O	O	O	O	O	O	O	O
<b>SHIELD, FUEL TANK</b>	NY1	Incls Protective Shield on Transfer Case for V Series		O	O	O	O	O	O	O	O	O	O
<b>SHOCKS</b>	Z75	Front Quad	V Models Only	—	—	—	—	O	O	O	O	O	O
<b>SILVERADO</b>	YE9	(See Trim Level Section)		O	O	O	O	O	O	O	O	O	O
<b>SPRINGS</b>	F60	Front, Heavy-Duty; Capacity 2250-lb. each; Incls HD Front and Rear Shocks w/o Z75 Shocks or B3J Diesel; Recom- mended for Front Mounted Applications Only in V1500 Applications		—	—	—	—	O	O	O	O	O	O
<b>STABILIZER BAR</b>	F58	Front Heavy-Duty 1.25-in. Diameter	Opt 2500 Only; Std on V Models	—	—	O	O	S	S	S	S	S	S
<b>TIRE EQUIPMENT</b>		(See Wheels and Tires for Details)											
P235/75R15	XFL YFL ZFL		YES and ZES Tires are Opt w/XFL on R1500 Models Only	S	S	—	—	S	S	—	—	—	—
P235/75R15	XFM YFM ZFM			O	O	—	—	O	O	—	—	—	—
P235/75R15	XHA YHA ZHA			O	O	—	—	O	O	—	—	—	—
P235/75R15	XHB YHB ZHB			O	O	—	—	O	O	—	—	—	—
P235/75R15	XES YES ZES			—	—	—	—	O	O	—	—	—	—
LT235/85R16E	XYN YYN ZYN		YYT and ZYT Tires are Opt w/XYN on R2500 Models Only. ZYN Spare Tire is Opt	—	—	S	S	—	—	S	S	—	—
LT235/85R16E	XYT YYT ZYT			—	—	—	—	—	—	O	O	—	—
<b>SPECIAL TRAILERING EQUIPMENT</b>	Z82	Heavy-Duty; Incls Platform Hitch, Wiring Harness and V02 Oil Cooler		O	O	O	O	O	O	O	O	O	O
<b>TRANSMISSION</b> 4-Speed Auto w/Overdrive	MX0	(See Powertrains)	N/A in CA. w/V1500 Series	S	S	S	S	S	S	S	S	S	S
<b>WHEEL TRIM</b>	P01	Wheel Covers; Incl w/YE9 Silverado	N/A N67 Rally or N90 Aluminum Wheels on R/V1500	O	O	O	O	O	O	O	O	O	O
<b>WHEELS</b>	N67 N90	Rally Aluminum, Cast	N/A R/V2500 N/A R/V2500	O	O	—	—	O	O	—	—	—	—

# SOLID COLOR (ZY1)

Solid color paint (ZY1) is standard on all models. All painted areas of the body and front-end sheet metal are the same color. Below are the interior trim colors and exterior paint combinations recommended by Chevrolet. However, any available interior trim color may be ordered. For further information, refer to Seats and Interior Trim pages as well as the Ordering Guide.

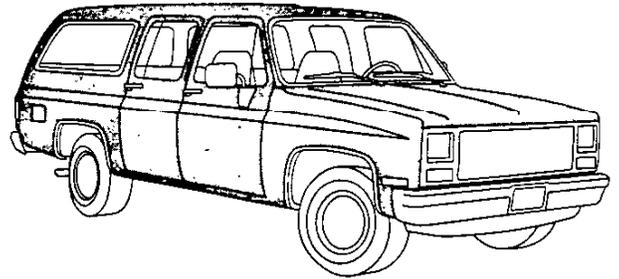


KEY: ●—Recommended    Blank—Available

EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS			
COLOR CODE 1	COLOR CODE 2		Blue	Garnet	Saddle	Gray
22 Brilliant Blue Met.	22 Brilliant Blue Met.	—	●			
27 Smoke Blue Met.	27 Smoke Blue Met.	—	●			●
33 Mojave Beige	33 Mojave Beige	—		●	●	
41 Onyx Black	41 Onyx Black	—		●	●	●
50 Summit White	50 Summit White	—	●	●	●	●
74 Fire Red	74 Fire Red	—		●	●	
96 Quicksilver Met.	96 Quicksilver Met.	—	●	●		●
97 Slate Met.	97 Slate Met.	—		●		●
98 Midnight Blue Met.	98 Midnight Blue Met.	—	●			●

# CONVENTIONAL TWO-TONE

(ZY2)

Conventional two-tone (ZY2) paint colors are optional on R/V Suburban models. This paint package includes black vinyl bodyside and rear moldings, including black-molded, rear-step bumper with bright trim, bright wheel opening moldings, and bright trim for front side marker lights and taillights. Color code 1 is applied to the areas above the moldings. Color code 2 is applied to the areas below the moldings and the area forward of the front wheel well. Below are the interior trim colors and exterior paint combinations recommended by Chevrolet. The only available color code 1/color code 2 exterior color combinations are those shown in the chart below. However, any available interior trim color may be ordered. For further information, refer to Seats and Interior Trim pages as well as the Ordering Guide.

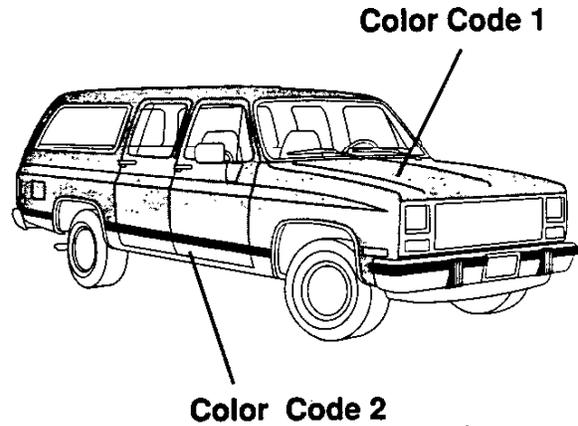

KEY: ●—Recommended Blank—Available


EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS			
COLOR CODE 1	COLOR CODE 2		Blue	Garnet	Saddle	Gray
22 Brilliant Blue Met.	50 Summit White	—	●			
	96 Quicksilver Met.	—	●			
	98 Midnight Blue Met.	—	●			
27 Smoke Blue Met.	50 Summit White	—	●			
	98 Midnight Blue Met.	—	●			
33 Mojave Beige	34 Sunset Gold Met.	—		●	●	
	41 Onyx Black	—			●	
41 Onyx Black	34 Sunset Gold Met.	—			●	
	50 Summit White	—		●		●
	74 Fire Red	—		●		●
	96 Quicksilver Met.	—		●		●
50 Summit White	97 Slate Met.	—		●		●
	22 Brilliant Blue Met.	—	●			
	27 Smoke Blue Met.	—	●			
	34 Sunset Gold Met.	—			●	
	41 Onyx Black	—	●	●	●	●
	74 Fire Red	—		●		●
74 Fire Red	97 Slate Met.	—		●		●
	98 Midnight Blue Met.	—	●			
	41 Onyx Black	—		●		
	50 Summit White	—		●		●
	96 Quicksilver Met.	—		●		
96 Quicksilver Met.	97 Slate Met.	—		●		
	74 Fire Red	—		●		●
	98 Midnight Blue Met.	—	●			●
	41 Onyx Black	—		●		●
97 Slate Met.	50 Summit White	—		●		●
	76 Fire Red	—		●		●
	96 Quicksilver Met.	—		●		●
	41 Onyx Black	—		●		●
98 Midnight Blue Met.	22 Brilliant Blue Met.	—	●			
	27 Smoke Blue Met.	—	●			
	34 Sunset Gold Met.	—			●	
	50 Summit White	—	●			
	96 Quicksilver Met.	—	●			●

# COLOR COMBINATIONS

## SPECIAL TWO-TONE

(ZY3)

Special two-tone (ZY3) paint colors include decal striping and a hood ornament (ornament standard on diesel engine models). The areas above the striping are painted color code 1, and the areas below are painted color code 2. Below are the interior trim colors and exterior paint combinations recommended by Chevrolet. They are the only available interior and exterior combinations allowed. For further information, refer to Seats and Interior Trim pages as well as the Ordering Guide.

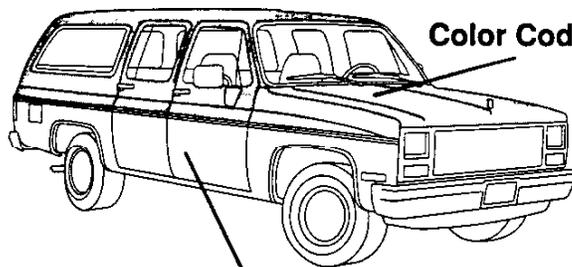

Color Code 2

KEY: ●—Recommended      Blank—Available

EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS			
COLOR CODE 1	COLOR CODE 2		Blue	Garnet	Saddle	Gray
22 Brilliant Blue Metallic	50 Summit White	Lt. Blue/Dk. Blue	●			
	96 Quicksilver Metallic	Lt. Blue/Dk. Blue	●			
	98 Midnight Blue Metallic	Lt. Blue/Dk. Blue	●			
27 Smoke Blue Metallic	50 Summit White	Lt. Blue/Dk. Blue	●			
	50 Summit White	Dk. Blue/Slate				●
	98 Midnight Blue Metallic	Lt. Blue/Dk. Blue	●			
33 Mojave Beige	34 Sunset Gold Metallic	Dk. Brown/Almond			●	
	34 Sunset Gold Metallic	Gold/Black		●		
	41 Onyx Black	Gold/Black			●	
41 Onyx Black	34 Sunset Gold Metallic	Gold/Black			●	
	50 Summit White	Vermillion/Dk. Carmine		●		
	50 Summit White	Silver/Black				●
	74 Fire Red	Vermillion/Slate				●
	74 Fire Red	Vermillion/Black		●		
	96 Quicksilver Metallic	Vermillion/Slate				●
	96 Quicksilver Metallic	Vermillion/Dk. Carmine		●		
	97 Slate Metallic	Vermillion/Black		●		
50 Summit White	22 Brilliant Blue Metallic	Lt. Blue/Dk. Blue	●			
	27 Smoke Blue Metallic	Lt. Blue/Dk. Blue	●			
	34 Sunset Gold Metallic	Dk. Brown/Almond			●	
	41 Onyx Black	Vermillion/Black	●			
	41 Onyx Black	Vermillion/Dk. Carmine		●		
	41 Onyx Black	Almond/Dk. Brown			●	
	41 Onyx Black	Silver/Black				●
	74 Fire Red	Vermillion/Slate				●
	74 Fire Red	Vermillion/Dk. Carmine		●		
	97 Slate Metallic	Vermillion/Dk. Carmine		●		
	97 Slate Metallic	Silver/Black				●
74 Fire Red	41 Onyx Black	Vermillion/Black		●		
	50 Summit White	Vermillion/Dk. Carmine		●		●
	96 Quicksilver Metallic	Vermillion/Dk. Carmine		●		
	97 Slate Metallic	Vermillion/Dk. Carmine		●		
	97 Slate Metallic	Vermillion/Black		●		
96 Quicksilver Metallic	22 Brilliant Blue Metallic	Lt. Blue/Dk. Blue	●			
	41 Onyx Black	Vermillion/Dk. Carmine		●		
	41 Onyx Black	Vermillion/Black				●
	74 Fire Red	Vermillion/Slate				●
	74 Fire Red	Vermillion/Dk. Carmine		●		
	97 Slate Metallic	Vermillion/Slate				●
	98 Midnight Blue Metallic	Lt. Blue/Dk. Blue	●			●
97 Slate Metallic	41 Onyx Black	Vermillion/Dk. Carmine		●		
	41 Onyx Black	Silver/Black				●
	50 Summit White	Vermillion/Dk. Carmine		●		
	50 Summit White	Silver/Black				●
	74 Fire Red	Vermillion/Slate				●
	74 Fire Red	Vermillion/Dk. Carmine		●		
	96 Quicksilver Metallic	Vermillion/Dk. Carmine		●		
	96 Quicksilver Metallic	Vermillion/Slate				●
98 Midnight Blue Metallic	22 Brilliant Blue Metallic	Lt. Blue/Dk. Blue	●			
	27 Smoke Blue Metallic	Lt. Blue/Dk. Blue	●			
	34 Sunset Gold Metallic	Gold/Black			●	
	50 Summit White	Lt. Blue/Dk. Blue	●			
	96 Quicksilver Metallic	Lt. Blue/Dk. Blue	●			
	96 Quicksilver Metallic	Vermillion/Slate				●

V SUBURBAN


**DELUXE  
TWO-TONE**

(ZY4)

Deluxe two-tone (ZY4) paint colors include decal striping, hood ornament (ornament standard on diesel engine models), black vinyl bodyside and rear moldings, including black-molded rear-step bumper with bright trim, bright wheel opening moldings, and bright trim for front-side marker lights and taillights. Color code 1, is applied to the areas above the striping and below the molding. Color code 2 is used between the striping and the molding and the area forward of the front wheel well. Below are the interior trim colors and exterior paint combinations recommended by Chevrolet. They are the only available interior and exterior combinations allowed. For further information, refer to Seats and Interior Trim pages as well as the Ordering Guide.

KEY: ●—Recommended Blank—Available


Color Code 1

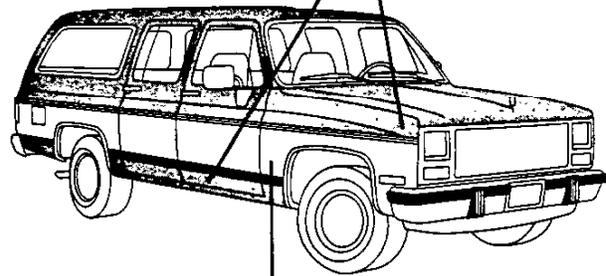

Color Code 2


EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS			
COLOR CODE 1	COLOR CODE 2		Blue	Garnet	Saddle	Gray
22 Brilliant Blue Met.	50 Summit White	Lt. Blue/Dk. Blue	●			
	96 Quicksilver Met.	Lt. Blue/Dk. Blue	●			
	98 Midnight Blue Met.	Lt. Blue/Dk. Blue	●			
27 Smoke Blue Met.	50 Summit White	Lt. Blue/Dk. Blue	●			
	50 Summit White	Dk. Blue/Slate				●
	98 Midnight Blue Met.	Lt. Blue/Dk. Blue	●			
33 Mojave Beige	34 Sunset Gold Met.	Dk. Brown/Almond			●	
	34 Sunset Gold Met.	Gold/Black		●		
	41 Onyx Black	Gold/Black			●	
41 Onyx Black	34 Sunset Gold Met.	Gold/Black			●	
	50 Summit White	Vermillion/Dk. Carmine		●		
	50 Summit White	Silver/Black				●
	74 Fire Red	Vermillion/Slate				●
	74 Fire Red	Vermillion/Black		●		
	96 Quicksilver Met.	Vermillion/Slate				●
	96 Quicksilver Met.	Vermillion/Dk. Carmine		●		
	97 Slate Met.	Vermillion/Black		●		
50 Summit White	97 Slate Met.	Silver/Black				●
	22 Brilliant Blue Met.	Lt. Blue/Dk. Blue	●			
	27 Smoke Blue Met.	Lt. Blue/Dk. Blue	●			
	34 Sunset Gold Met.	Dk. Brown/Almond			●	
	41 Onyx Black	Vermillion/Black	●			
	41 Onyx Black	Vermillion/Dk. Carmine		●		
	41 Onyx Black	Almond/Dk. Brown			●	
	41 Onyx Black	Silver/Black				●
	74 Fire Red	Vermillion/Slate				●
	74 Fire Red	Vermillion/Dk. Carmine		●		
	97 Slate Met.	Vermillion/Dk. Carmine		●		
74 Fire Red	97 Slate Met.	Vermillion/Slate				●
	98 Midnight Blue Met.	Lt. Blue/Dk. Blue	●			
	41 Onyx Black	Vermillion/Black	●			
	50 Summit White	Vermillion/Slate		●		●
	96 Quicksilver Met.	Vermillion/Dk. Carmine		●		
96 Quicksilver Met.	97 Slate Met.	Vermillion/Dk. Carmine		●		
	22 Brilliant Blue Met.	Lt. Blue/Dk. Blue	●			
	41 Onyx Black	Vermillion/Dk. Carmine		●		
	41 Onyx Black	Vermillion/Black				●
	74 Fire Red	Vermillion/Slate				●
	74 Fire Red	Vermillion/Dk. Carmine		●		
97 Slate Met.	97 Slate Met.	Vermillion/Slate				●
	98 Midnight Blue Met.	Lt. Blue/Dk. Blue	●			
	41 Onyx Black	Vermillion/Dk. Carmine		●		
	41 Onyx Black	Silver/Black				●
	50 Summit White	Vermillion/Dk. Carmine		●		
	50 Summit White	Silver/Black				●
98 Midnight Blue Met.	74 Fire Red	Vermillion/Slate				●
	74 Fire Red	Vermillion/Dk. Carmine		●		
	96 Quicksilver Met.	Vermillion/Dk. Carmine		●		
	96 Quicksilver Met.	Vermillion/Slate				●
	96 Quicksilver Met.	Vermillion/Slate				●

# Colors

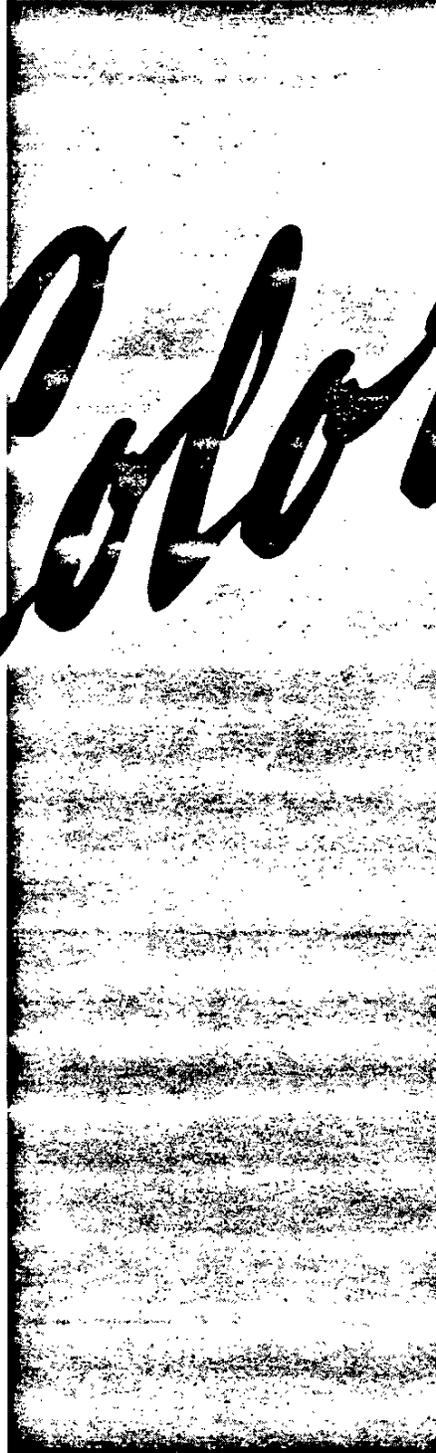


■ The paint samples below are representative of the exterior colors offered on the R/V Suburban. Refer to the Color and Trim availability charts to determine specific availability. Red indicates a new color for 1991.

22 BRILLIANT BLUE MET.

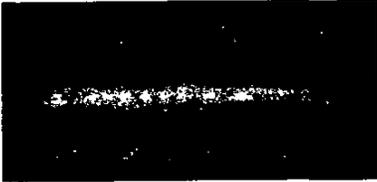


27 SMOKE BLUE MET.

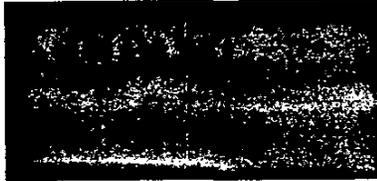


33 MOJAVE BEIGE



34 SUNSET GOLD MET.  
(color code 2 only)

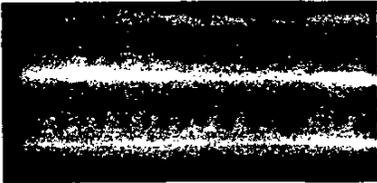


41 ONYX BLACK

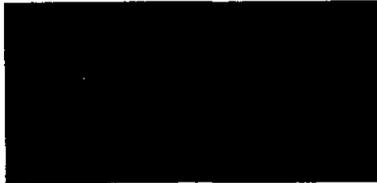


50 SUMMIT WHITE




74 FIRE RED

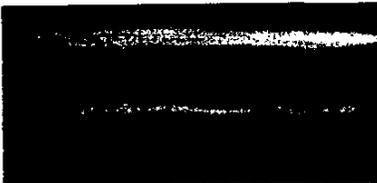


96 QUICKSILVER MET.

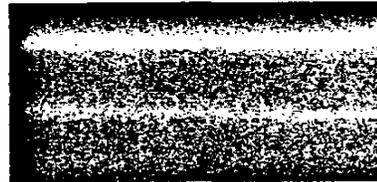


97 SLATE MET.

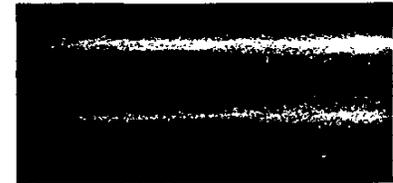

98 MIDNIGHT BLUE MET.

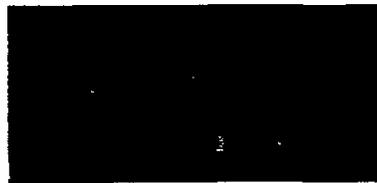



A SADDLE  
CUSTOM VINYL



B BLUE  
CUSTOM VINYL



C SADDLE  
CUSTOM CLOTH




D BLUE  
CUSTOM CLOTH



E GARNET  
CUSTOM CLOTH



F GRAY  
CUSTOM CLOTH



G SADDLE  
DELUXE CLOTH



H BLUE  
DELUXE CLOTH

**TRIM, SEAT AND INTERIOR COLOR SELECTION**

MODEL	R/V1500/2500	MODEL	R/V1500/2500
TRIM (Code)	SCOTTSDALE (Std)	TRIM (Code)	SILVERADO (YE9)
SEAT (Code)	BENCH SEAT (***)	SEAT (Code)	BENCH SEAT (***)
Interior Color Availability	A Saddle Custom Vinyl B Blue Custom Vinyl G Saddle Deluxe Cloth H Blue Deluxe Cloth	Interior Color Availability	C Saddle Custom Cloth D Blue Custom Cloth E Garnet Custom Cloth F Gray Custom Cloth
SEAT (Code)		SEAT (Code)	RECLINING BUCKET SEAT (***)
Interior Color Availability		Interior Color Availability	C Saddle Custom Cloth D Blue Custom Cloth E Garnet Custom Cloth F Gray Custom Cloth
OPTIONAL SEAT (Code)	CENTER BENCH SEAT (AT5)	OPTIONAL SEAT (Code)	CENTER BENCH SEATS (AT5)
Interior Color Availability	A Saddle Custom Vinyl B Blue Custom Vinyl G Saddle Deluxe Cloth H Blue Deluxe Cloth	Interior Color Availability	C Saddle Custom Cloth D Blue Custom Cloth E Garnet Custom Cloth F Gray Custom Cloth
OPTIONAL SEAT (Code)	CENTER AND REAR BENCH SEATS (AS3)	OPTIONAL SEAT (Code)	CENTER AND REAR BENCH SEATS (AS3)
Interior Color Availability	A Saddle Custom Vinyl B Blue Custom Vinyl G Saddle Deluxe Cloth H Blue Deluxe Cloth	Interior Color Availability	C Saddle Custom Cloth D Blue Custom Cloth E Garnet Custom Cloth F Gray Custom Cloth

## R/V SUBURBAN



### ■ FULL FRONT BENCH SEAT


**PASSENGER CAPACITY:** 3

**TRIM:** Scottsdale (Std);  
Silverado (YE9)

**AVAILABILITY:** R/V1500;  
R/V2500

**ORDERING CODE:** \*\*\*1

The standard foam bench-type seat features full width, full depth and will seat three passengers. It is available in Custom Vinyl and Deluxe Cloth for the Scottsdale (Std) or Custom Cloth for the Silverado (YE9).

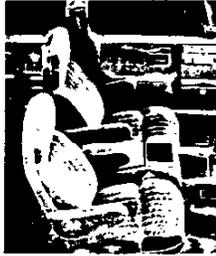

### ■ RECLINING FRONT BUCKET SEATS (DRIVER AND PASSENGER)

**PASSENGER CAPACITY:** 2

**TRIM:** Silverado (YE9)

**AVAILABILITY:** R/V1500;  
R/V2500

**ORDERING CODE:** \*\*\*6

These optional reclining bucket-type seats have foam padding and folding backrests with inertia latches. A center and overhead roof console are included. These seats are only available in Custom Cloth.



### ■ FULL CENTER BENCH SEAT

**PASSENGER CAPACITY:** 3

**TRIM:** Scottsdale (Std); Silverado (YE9)

**AVAILABILITY:** R/V1500;  
R/V2500

**ORDERING CODE:** AT5

The optional center foam bench-type seat features full width, full depth and will seat three passengers. This seat is available in Custom Vinyl or Deluxe Cloth for the Scottsdale (Std) or Custom Cloth for the Silverado (YE9).



### ■ FULL CENTER AND REAR BENCH SEATS

**PASSENGER CAPACITY:** 6

**TRIM:** Scottsdale (Std);  
Silverado (YE9)

**AVAILABILITY:** R/V1500;  
R/V2500

**ORDERING CODE:** AS3

The center foam bench-type seat features full width, full depth and will seat three passengers. It is non-adjustable with independent LH and RH folding sections. The rear seat is a quick-release removable bench that seats three passengers. These seats are optional and available in Custom Vinyl and Deluxe Cloth for the Scottsdale (Std) or Custom Cloth for the Silverado (YE9).

### SPECIAL TRAILERING PACKAGES

If you intend to tow a light trailer (up to 2000 lbs. gross weight) with your new R/V Suburban, an optional Special Trailering Package is not required. A deadweight hitch and 5-wire wiring harness are recommended for trailers up to 2000 lbs. The hitch is available as an accessory, but the harness must be furnished by an outside supplier.

If you intend to tow a medium trailer (2000 to 4000 lbs. gross weight) or a heavy trailer (4000 to 9500 lbs. gross weight), Heavy-duty Special Trailering Package RPO Z82 is recommended for medium trailers and is a required option for heavy trailers. This Z28 option is also required, regardless of gross trailer weight, if your trailer tongue weight exceeds 400 lbs. RPO Z82 includes a weight-distributing hitch platform receiver which is bolted to the undercarriage and a heavy-duty 7-wire

wiring harness that requires a connector. See the chart below for trailering options in addition to Special Trailering Packages.

The chart below indicates, in **bold type**, the trailering equipment required in a Suburban for light, medium and heavy trailer towing. Additional recommended options are also indicated. To help you in ordering, each column lists Regular Production Option (RPO) numbers.

NOTE: Model and driveline combinations must be verified by your local dealer for correct emissions equipment.

REQUIRED/RECOMMENDED TRAILERING EQUIPMENT												
Trailer Classification	Gas-Powered Suburban						Diesel-Powered Suburban					
	Light	Medium	Heavy				Light	Medium	Heavy			
Maximum gross Trailer Weight (lbs.) <sup>1</sup>	2000	4000	7000	9500	6500	7500	2000	4000	6000	8000	5500	6000
Maximum Tongue Load (lbs.)	200	500	850	1000	750	900	200	500	750	950	700	750
Truck Series	All	All	2WD	2WD	4WD	4WD	All	All	2WD	2WD	4WD	4WD
	Series	Series	R1500	R2500	V1500	V2500	Series	Series	R1500	R2500	V1500	V2500
Special Trailering Package	—	Z82	Z82	Z82	Z82	Z82	—	Z82	Z82	Z82	Z82	Z82
7-Wire Wiring Harness (incl. in RPO Z82)	—	Incl.	Incl.	Incl.	Incl.	Incl.	—	Incl.	Incl.	Incl.	Incl.	Incl.
Deadweight Hitch	X <sup>2</sup>	—	—	—	—	—	X <sup>2</sup>	—	—	—	—	—
Weight-Distributing Hitch Platform (incl. in RPO Z82)	—	Incl.	Incl.	Incl.	Incl.	Incl.	—	Incl.	Incl.	Incl.	Incl.	Incl.
Std. 5.7L (350 Cu. In.) V8 Gas	L05	L05	L05	L05	L05	L05	—	—	—	—	—	—
Opt. 7.4L (454 Cu. In.) V8 Gas	—	—	—	L19	—	—	—	—	—	—	—	—
Std. 6.2L (479 Cu. In.) V8 Diesel	—	—	—	—	—	—	LH6/LL4	LH6/LL4	LH6	LL4	LH6	LL4
Minimum Axle Ratio (Gross Trailer Weight, lbs.) w/5.7L V8 Engine	Std.	Std.	3.42 (6000)	3.73 (6500)	3.42 (5500)	3.73 (6000)	Std.	Std.	—	—	—	—
			3.73 (7000)	4.10 (8000)	3.73 (6500)	4.10 (7500)						
w.7.4L V8 Engine	—	—	—	4.56 (9500)	—	—	—	—	—	—	—	—
	—	—	—	3.73 (8500)	—	—	—	—	—	—	—	—
	—	—	—	4.10 (9500)	—	—	—	—	—	—	—	—
w/6.2L V8 Diesel Engine	—	—	—	—	—	—	—	—	3.42 (5000)	4.10 (6500)	3.42 (4500)	3.73 (5000)
	—	—	—	—	—	—	—	—	—	4.56 (8000)	3.73 (5500)	4.10 (6000)
	—	—	—	—	—	—	—	—	—	—	—	—
Engine Oil Cooler (incl. in RPO Z82)	—	KC4	KC4	KC4	KC4	KC4	—	Std.	Std.	Std.	Std.	Std.
Transmission Oil Cooler (Incl. in RPO Z28)	—	V02	V02	V02	V02	V02	—	V02	V02	V02	V02	V02
Camper-Type Mirrors	—	DF2	DF2	DF2	DF2	DF2	—	DF2	DF2	DF2	DF2	DF2
Electronic Speed Control and Comfortit Steering Wheel	—	ZQ3	ZQ3	ZQ3	ZQ3	ZQ3	—	ZQ3	ZQ3	ZQ3	ZQ3	ZQ3

<sup>1</sup> If you order more than the minimum required equipment or carry more than two passengers, the additional weight must be subtracted from the maximum trailer weight.

<sup>2</sup> Deadweight trailer hitch and 5-wire wiring harness available from outside suppliers. Deadweight hitch also available as an accessory.

### HOW TO USE GCWRs TO DETERMINE POWERTRAIN AND REAR AXLE RATIO FOR TRAILERING

Perhaps you prefer to use Gross Combination Weight Ratings (GCWRs) to determine the engine, transmission and rear axle ratio you will require to tow a special trailer with your truck. The chart below allows you to do just that. It shows you the maximum allowable GCWR based on all the available truck engines

and rear axle ratios with automatic or manual transmissions. **The GCWR includes the total loaded weight of both the truck and trailer.** Any available engine may be used for trailering if the GCWR shown is not exceeded. The trailer weight can be increased by 25% if the vehicle speed will not exceed 25 mph.

GROSS COMBINATION WEIGHT RATING (GCWR)																				
By Engine & Axle Ratio For Ratio For Recreational Applications																				
GCWR (lb.)	6000	6500	7000	7500	8000	8500	9000	9500	10,000	10,500	11,000	11,500	12,000	12,500	13,500	14,000	14,500	15,000	16,000	19,000
Engines	Rear Axle Ratios																			
5.7L (350) V8 Gas							2.73		3.08		3.42		3.73		4.10			4.56		
6.2L (379) V8 Diesel							3.08		3.42		3.73		4.10		4.56					
7.4L (454) V8 Gas															3.42		3.73		4.10	

When towing a trailer in excess of 4000 lbs. with a truck equipped with a 4-speed automatic transmission, it is recommended to shift to third gear range ("D") instead of overdrive ("O") for normal towing, and to manually downshift as required on uphill and downhill grades.  
Note: Model and driveline combinations must be verified by your local dealer for correct emissions equipment.

### GENERAL TRAILERING INFORMATION

Chevrolet Truck offers a wide selection of available options for trailering and a few of them are described here.

#### LOAD-DISTRIBUTING PLATFORM

Required when towing trailers over 2000 lbs. Installs quickly and easily. Dealer-installed accessory. See chart for part numbers.

#### LIGHT-DUTY TRAILER HITCH

For Hauling trailers up to 2000 lbs. with a maximum tongue load of 200 lbs. A 1 7/8"-diameter ball is included. (Dealer-installed accessory. See chart for part numbers.)

#### HITCH BALLS

1 7/8"-diameter ball is standard with light-duty hitches. It is also available as an accessory: Part No. 981148. A 2"-diameter ball is also available for hitches as Part No. 980670.

#### WIRING HARNESSES

5-wire used with trailers up to 2000 lbs. gross weight and 7-wire for larger trailers. Harnesses tie into vehicle's electrical system to activate trailer lights, plus electric brakes or battery charging.

#### TRUCK WIRING CODE

The following color code for trucks should be used when installing trailer wiring harnesses.

- **Blue.** Used for electric trailer brakes or auxiliary wiring.
- **Red.** Used for battery charging. Connects to starter solenoid. (7-wire harness only).
- **Light Green.** Backup lights (7-wire harness only).
- **Brown.** Taillight and running lights.
- **Yellow.** Left stop and turn signal.
- **Dark Green.** Right stop and turn signal.
- **White.** Ground.

#### MIRRORS

Trucks used as tow vehicles will require outside mirrors with extensions that exceed the width of the trailer to be towed. Optional mirrors with larger mounting brackets are available with all truck models.

#### COOLERS AND COOLING

Trailering creates higher-than-normal temperatures in coolant, engine and transmission oil. To help control these temperatures, consider the following separate options.

**RPO V02.** This is an extra-capacity heavy-duty automatic transmission oil cooler option. (Included in RPO Z82 Trailering Special Package.)

**RPO KC4.** This optional engine oil cooler circulates oil through a separate cooler mounted ahead of the radiator. (Included in RPO Z82 Trailering Package.)

#### DEALER-INSTALLED TRAILER HITCHES

	Light Up to 2000-Lbs. 200-Lb. Tongue Load	Light/Medium Up to 2000-Lbs. 200-Lb. Tongue Load	Heavy Up to 6000-Lbs. 750-Lb. Tongue Load	Heavy Up to 9500-Lbs. 1000-Lb. Tongue Load
Type of Hitch	Deadweight <sup>1</sup>	Rear Step Bumper	Weight-Distrib. Platform	Weight-Distrib. Platform
R/V Suburban	996922	—	—	996924 <sup>2</sup>

<sup>1</sup> Deadweight hitch includes 1 7/8" ball.

<sup>2</sup> Maximum trailer weight 9500 lbs. Maximum tongue load 1000 lbs.