

CONTENTS

	<u>Page</u>
MODELS	2
SEATING ARRANGEMENTS	4
STANDARD TRIM	5
BEAUVILLE TRIM	6
POWERTRAINS	7
STANDARD SUSPENSION	10
OPTIONAL SUSPENSION	11
WHEELS AND TIRES	12
STEERING/BRAKES	13
ELECTRICAL	14
COOLING	16
DIMENSIONS	17
OPTIONS	19
COLOR COMBINATIONS	21
EXTERIOR COLORS	B
INTERIOR TRIM	C
SEATS	D
TRAILERING	E

KEY: Red Print Indicates Not Available in California

PASSENGER VAN

G10 SPORTVAN (110-IN. WB)	MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP.	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
	CG11006	110	5600	1392	5	4.3L V6/A4	5.0L V8/A4
CG11006 ²	110	6000	1792	5	4.3L V6/A4	5.0L V8/A4	
G10 SPORTVAN (125-IN. WB)	MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP.	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
	CG11306	125	5600	1071	5	4.3L V6/A4	—
	CG11306	125	6000	1471	5	4.3L V6/A4	5.0L V8/A4 5.7L V8/A4
G20 SPORTVAN (125-IN. WB)	MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP.	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
	CG21306 ²	125	6600	2060	5/8	4.3L V6/A4	5.0L V8/A4 5.7L V8/A4
G30 SPORTVAN (125-IN. WB)	MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
	CG31306	125	7400	2303	12	5.7L V8/A4	—

G10 SPORTVAN (110-IN. WHEELBASE)
The G10 Sportvan 110-in wheelbase is the base full-size passenger van model and the only 110-in. wheelbase model in the Sportvan line.

G10 SPORTVAN (125-IN. WHEELBASE)
The G10 Sportvan 125-in. wheelbase model offers increased cargo length and volume when compared to the 110-in wheelbase G10 model.

G20 SPORTVAN
The G20 Sportvan offers increased GVWR capacity when compared to the G10 Sportvan models.

G30 SPORTVAN
The G30 Sportvan offers standard seating for 12 passengers and increased GVWR's when compared to the G10 and G20 models.

¹Based on Curb Weight.

²CG21306 is also available with a 6850 lb. GVWR, 6.2L V8/A4 engine/transmission, and P235/75R15 tires.

Key: Red Print Indicates Not Available in California

PASSENGER VAN

G30 HEAVY-DUTY SPORTVAN
The G30 Heavy-Duty Beauville (C6P) offers an increased GVWR when compared to the regular G30 models.

G30 HEAVY-DUTY SPORTVAN (125 IN. WB)



MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP.	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CG31306	125	8600	3582	5/8/12	5.7L V8/A4	6.2L V8/A4 7.4L V8/A4

G30 EXTENDED VAN SPORTVAN
The G30 Extended Van Sportvan is 21 inches longer than the other G30 models, and offers standard 12-passenger seating with an optional 15-passenger seating capacity.

G30 EXTENDED SPORTVAN (146-IN. WB)



MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX' PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CG31606	146	8600	3073	12/15	5.7L V8/A4	6.2L V8/A4 7.4L V8/A4

*Based on Curb Weight.

SEATING ARRANGEMENTS


5-PASSENGER SEATING:

Standard on all G10, G20 models and CG31306 models with C6P.



5-PASSENGER SEATING WITH TRAVEL BED REPLACING REAR SEAT (B6S):

Optional on CG11306, CG21306 models and CG31306 models with C6P.



8-PASSENGER SEATING (AQ3):

Optional on CG21306 and on CG31306 models with C6P.



8-PASSENGER SEATING WITH TRAVEL BED REPLACING REAR SEAT (B6S/AQ3):

Optional on G20 and CG31306 models with C6P.



12-PASSENGER SEATING (AQ4):

Standard on G30 models without C6P; Optional on CG31306 models with C6P.




12-PASSENGER SEATING:

Standard on CG31606 Extended models.



15-PASSENGER SEATING (ZP3):


Optional on CG31606 Extended models.



SIDE DOOR APPLICATIONS

STANDARD: CHOICE OF STANDARD SWING-OUT SIDE DOORS (E24) OR SLIDING SIDE DOOR (YA2)

All Sportvan models are offered with a choice of standard swing-out side doors (E24) or a sliding side door (YA2) (available at no extra cost). N/A on extended vans.



STANDARD

The Standard trim level of the Sportvan series is designed to offer buyers a high level of standard features when purchasing a standard-level van.

The following features are standard.

POWERTRAIN/CHASSIS

- ALTERNATOR: 100-Amp
- BATTERY:—12 volt, neg. ground; 630 CCA @ 0 degrees F.
- BRAKES: Power; vacuum. Front disc, Rear drum; includes rear wheel anti-lock brakes
- ENGINE: 4.3-liter V6 EFI on G10 and G20 series. 150 net HP @ 4000 rpm and 230-lb. ft. of net torque @ 2400 rpm. 5.7-liter V8 EFI on G30 series. 195 net HP @ 4000 rpm and 290-lb. ft. of net torque @ 2400 rpm at 7400-lb. GVWR. and 190 net HP @ 4000 rpm and 300 lb. ft. of net torque @ 2400 rpm at 8600-lb GVWR.
- EXHAUST: Single.
- FRAME: All-welded integral body-frame construction.
- FUEL TANKS: 33-gallon (approx.) capacity. 22-gallon (approx.) capacity on CG11006 model.
- REAR AXLE: Hypoid, Semi-Floating on G10, G20; full-floating on G30. Ratios vary with model.
- SHOCK ABSORBERS: Front—32 mm. heavy duty piston diameter; Rear—32 mm.
- STABILIZER BAR: Front—1.06 inch dia.
- STEERING: Integral power. Ratio—17.2:1.
- SUSPENSION: Front—Independent coil spring. Rear—Semi-Elliptic Two-Stage Multi-Leaf.
- TRANSMISSION: 4-speed automatic with overdrive.

EXTERIOR

- BUMPERS: Front and rear chromed, with front bumper guards.
- COLORS: Choice of ten in a solid paint scheme. See Color and Trim Specifications for details.
- DOORS: RH and LH front side, rear load, and 60/40 hinged side-loading doors (RH sliding side-door also available at no extra cost; not available on extended vans).
- DOOR STOPS: Positive rear.
- GLASS: Includes windshield, side door, swing-out rear doors, side load doors, swing-out LH front quarter glass, and RH and LH rear quarter fixed glass.
- GRILLE: Molded plastic and front lamp bezel painted light and dark argent.
- HEADLAMPS: Single rectangular halogen.
- HORN: Dual high-note and low-note.
- HUB CAPS: Bright metal with black trim.
- MIRRORS: White RH and LH below-eye-line type with adjustable head. Head size is 6.5" x 9.0".
- TIRES: Four steel-belted radials. G10 includes matching spare. (See Wheels and Tires for details.)
- UNDERCOATING: On body rocker panels, step panels and wheelhousings.
- WHEELS: Five (including spare) white painted steel (15.0" x 6.0" on G10 and G20; 16.0" x 6.5" on G30).

INTERIOR


- ARMRESTS: Padded RH and LH side door and rear.
- ASHTRAY: Instrument panel and front bucket seat backs.
- BEVERAGE HOLDERS: Parcel tray and top surface of instrument panel extension.
- CIGARETTE LIGHTER: Located on instrument panel, includes ashtray lamp.
- COAT HOOKS: LH.
- COLORS: Choice of four. Blue, Garnet, Beige or Gray.
- DOOR SEALS: Latex foam rubber.
- DOME LAMP: Front and rear with front door-actuated switches.
- DOOR TRIM PANEL: Color-keyed cloth in door and sidewalls and carpeting on lower areas.
- FLOOR COVERINGS: Embossed black rubber mats over floor and front wheelhousings.
- GAUGES: Include speedometer, odometer, trip odometer, fuel level, voltmeter, oil pressure, engine temperature and additional telltale lights.
- HEADLINER: Full-length color-keyed with garnish moldings. Not included on CG11006.
- HEATER: Deluxe outside air and defogger with side window defoggers.
- INSULATION: Sound deadening material under instrument panel, front floor panel, engine cover front extension and inside engine cover.
- MIRROR: 10-inch rearview.
- RADIO: Electronically-tuned AM with two 4" x 6" front dash speakers, digital clock, fixed mast antenna and reception improvements. (Refer to the Delco Electronics brochure in RPO Detail for further information).
- SEATS: Five passenger seating with front adjustable high-back buckets and removable 3-pass. bench with all-vinyl trim on G10, G20, and G30 125" WB models at 8600 GVWR. G30 w/7400-lb. GVWR features 12-pass. seating, adding a second position middle and rear 4-pass. bench seat with all-vinyl trim. Extended Van models feature 12-pass. seating, with a 15-pass. seating option.
- SPARE TIRE/WHEEL: Full-size spare tire and wheel on G10 models. (Spare wheel only on G20 and G30 models).
- SPARE TIRE CARRIER: On RH rear side.
- STEERING WHEEL: 2-spoke black vinyl.
- SUNSHADES: Padded, color-keyed RH and LH sunshades.
- STEP PADS: Safety, on front and rear side door step panels.
- TOOLS: Include mechanical jack and wheel wrench located at RH rear of vehicle.
- TRIM PANELS: Custom cloth on front and rear side door(s) and rear quarter panels (no trim panels on rear doors). Not included on CG11006 models.
- WINDOWS: Tinted glass.
- WINDSHIELD WIPERS: Intermittent.

BEAUVILLE

(E94)

The Beauville trim level is an optional trim level for the Sportvan series. It is designed to offer buyers a high level of comfort and convenience features compared to the Standard trim level.

The following features are standard. Bold type denotes equipment in addition to or replacing that of the Standard trim level.

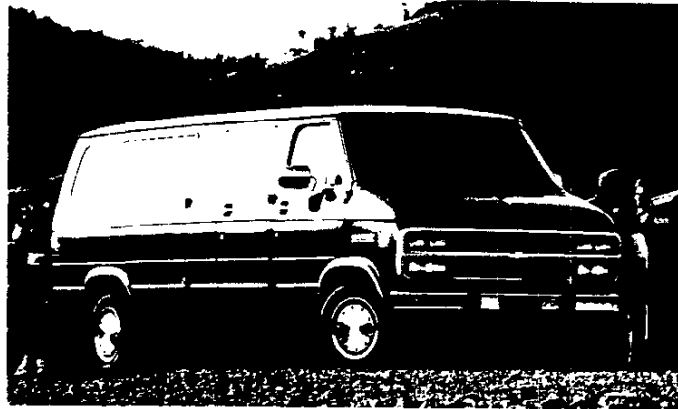

Some equipment shown may be optional or extra cost.

POWERTRAIN/CHASSIS

- ALTERNATOR: 100-Amp
- BATTERY: 12 volt, neg. ground; 630 CCA @ 0 degrees F.
- BRAKES: Power; vacuum. Front—disc. Rear—drum includes rear wheel anti-lock braking system.
- ENGINE: 4.3-liter V6 EFI on G10 and G20 series. 150 net HP @ 4000 rpm and 230-lb. ft. of net torque @ 2400 rpm. 5.7-liter V8 EFI on G30 series. 195 net HP @ 4000 rpm and 230-lb. ft. of net torque @ 2400 rpm with 7400-lb.

GVWR, and 190 net HP @ 4000 rpm and 300-lb. ft. of net torque @ 2400 rpm on 8600-lb. GVWR.

- EXHAUST: Single.
- FRAME: All-welded integral body-frame construction.
- FUEL TANKS: 33-gallon (approx.) capacity. 22-gallon (approx.) capacity on CG11006.
- REAR AXLE: Hypoid, Semi-Floating on G10, G20; full-floating on G30. Ratios vary with model.

- SHOCK ABSORBERS: Front—32 mm, heavy duty piston diameter; Rear—32 mm.
- STABILIZER BAR: Front—1.06 inch dia.
- STEERING: Integral power. Ratio—17.2:1.
- SUSPENSION: Front—Independent coil spring. Rear—Semi-Elliptic Two-Stage Multi-Leaf.
- TRANSMISSION: 4-speed automatic with overdrive.

EXTERIOR

- BUMPERS: Front and rear chromed, with front bumper guards.
- COLORS: Choice of ten in a solid paint scheme. See Color and Trim Specifications for details.
- DOORS: RH and LH front side, rear load doors, 60/40 hinged side-loading doors (RH sliding side-door also available at no extra cost); N/A on extended vans.
- DOOR STOPS: Positive rear.

- GLASS: Includes windshield, side door, swing-out rear doors, side load doors, swing-out LH front quarter glass, and RH and LH rear quarter fixed glass.
- GRILLE: Molded plastic and front lamp bezels painted dark argent with chrome trim.
- HEADLAMPS: **Dual rectangular including halogen high-beam.**
- HORN: Dual high-note and low-note.
- HUB CAPS: Bright metal with black trim.
- MIRRORS: White RH and LH below-eye-line with adjustable head. Head size is 6.5" x 9.0".

- **MOLDINGS: Black body side with bright trim and bright wheel opening.**
- **NAMEPLATE: Beauville nameplate.**
- TIRES: Four steel-belted radials. (See Wheels and Tires for details).
- UNDERCOATING: On body rocker panels, step panels and wheelhouses.
- WHEELS: Five (including spare) white steel (15.0" x 6.0" on G10 and G20; 16.0" x 6.5" on G30 models.)

INTERIOR

- ARMRESTS: Padded RH and LH side door and rear.
- ASHTRAY: Instrument panel and front bucket seat backs.
- BEVERAGE HOLDERS: Parcel tray and top surface of instrument panel extension.
- CIGARETTE LIGHTER: Located on instrument panel, includes ashtray lamp.
- COAT HOOKS: LH and RH
- COLORS: Choice of four. Blue, Garnet, Beige or Gray.
- DOOR SEALS: Latex foam rubber.
- DOME LAMP: Front and rear with front door-actuated switches.
- **FLOOR COVERINGS: Color-keyed carpeting over floor with front and rear, color-keyed floor mats.**
- GAUGES: Include speedometer, odometer, trip odometer, fuel level, voltmeter, oil pressure, engine temperature and additional telltale lights.
- HEADLINER: **Full length, color-keyed cloth with garnish moldings.**

- HEATER: Deluxe outside air and defogger with side window defoggers.
- INSULATION: Instrument panel, front floor panel, engine cover front extension and inside engine cover. **Also, above headliner and on wheelhousing.**
- MIRROR: 10-inch rearview.
- RADIO: Electronically-tuned AM with two 4" x 6" speakers located in front dash, digital clock, fixed mast antenna and reception improvements. (Refer to the Delco Electronics brochure in RPO Detail for further information.)
- SEATS: Five passenger seating with front adjustable high-back buckets and a removable 3-pass. bench with vinyl trim standard on all G10, G20, models and G30 125" & 146" WB models. G30 w/7400-lb. GVWR feature 12-pass. seating, adding a second position middle and rear 4-pass. bench with vinyl trim. 146" WB features 12-passenger seating, with a 15-passenger option. **Choice of a Custom Vinyl or Custom Cloth trim on all models except CG11006.**

- SPARE TIRE/WHEEL: Full-size on G10 models. (Spare wheel only on G20 and G30 series.)
- SPARE TIRE CARRIER: On RH rear side.
- STEERING WHEEL: **Sport.**
- **STEPWELL MATS: Embossed, black rubber for top surface of front and rear door stepwells.**
- STEP PADS: Safety, on front and rear side door step panels.
- **STORAGE COMPARTMENT: Locking, under front passenger seat.**
- SUNSHADES: Padded, color-keyed RH and LH. **RH visor with mirror and light also included.**
- TOOLS: Include mechanical jack and wheel wrench located at RH rear of vehicle.
- TRIM PANELS: Custom cloth on front and rear side door(s) and rear quarter panels (no trim panels on rear doors). Not included on CG11006 models
- WINDOWS: Tinted glass.
- WINDSHIELD WIPERS: Intermittent.

POWERTRAINS

1992
SPORTVAN

KEY: S Standard O Optional Red Not available/California Emissions
— Not Offered Bold Not available/High Altitude Emissions

MODEL	ENGINE	TRANSMISSION	AXLES					GVWR
			ECONOMY		POWER			
			3.08	3.23	3.42	3.73	4.10	
G10 SPORTVAN (110-IN. WB) CG11006	4.3L V6 (LB4)	S	—	—	S	O	—	5600 ² 6000 ²
	5.0L V8 (L03)	S	S	—	O	—	—	5600 ² 6000 ²
G10 SPORTVAN (125-IN. WB) CG11306	4.3L V6 (LB4)	S	—	—	S	O	—	5600 ² 6000 ²
	5.0L V8 (L03)	S	S	—	O	—	—	6000 ³
	5.7L V8 (L05)	S	S	—	O	—	—	6000 ³
G20 SPORTVAN (125-IN. WB) CG21306	4.3L V6 (LB4)	S	—	—	S	O	—	6600
	5.0L V8 (L03)	S	S	—	O ³	O ³	—	6600
	5.7L V8 (L05)	S	S	—	O ³	O ³	—	6600
	6.2L V8 DIESEL (LH6)	S	—	—	S	O ³	—	6850 ⁵
G30 SPORTVAN (125-IN. WB) CG31306	5.7L V8 (L05)	S	—	S	—	—	—	7400
G30 H.D. SPORTVAN (125-IN. WB) CG31306/C6P	5.7L V8 (L05)	S	—	—	—	S	O	8600
	7.4L V8 (L19) ^{1,4}	S	—	—	S	O	O	8600
	6.2L V8 DIESEL (LL4)	S	—	—	—	S	O	8600
G30 EXTENDED VAN SPORTVAN (146-IN. WB) CG31606	5.7L V8 (L05)	S	—	—	—	S	O	8600
	7.4L V8 (L19) ¹	S	—	—	S	O	O	8600
	6.2L V8 DIESEL (LL4)	S	—	—	—	S	O	8600

¹ Requires KC4 Engine Oil Cooler.

² Requires P205/75R15 tires.

³ N/A P205/75R15 tires.








⁴ Standard with High Altitude Emissions.

⁵ Requires Z82 Trailing Equipment.

⁶ Requires P235/75R15 tires.

HORSEPOWER AND TORQUE RATINGS

ENGINE	4.3L V6	5.0L V8	5.7L V8		7.4L V8	6.2L V8 DIESEL	6.2L V8 H.D. DIESEL
RPO CODE	LB4	L03	L05		L19	LH6	LL4
RESTRICTIONS			7400 LBS. GVWR OR BELOW	AT 8600 LBS. GVWR	AT 8600 LBS. GVWR	UP TO 8600 LBS. GVWR	8600 LBS. GVWR
CHART REFERENCE CODE	A	B	C	D	E	F	G
SAE NET HORSEPOWER @ RPM	150 @ 4000	170 @ 4000	195 @ 4000	190 @ 4000	230 @ 3600	145 @ 3600	155 @ 3500
SAE NET TORQUE Lb. Ft. @ RPM	230 @ 2400	265 @ 2400	290 @ 2400	300 @ 2400	385 @ 1600	260 @ 1900	285 @ 2000
FUEL SYSTEM	TBI	TBI	TBI	TBI	TBI	Gear Driven Mechanical Fuel Injection	Gear Driven Mechanical Fuel Injecton
CLUTCH SIZE (in.)	-	-	-	-	-	-	-
STD. BATTERY Cold Cranking Amps @ 0° F	630	630	630	630	630	2 @ 540 Each	2 @ 540 Each

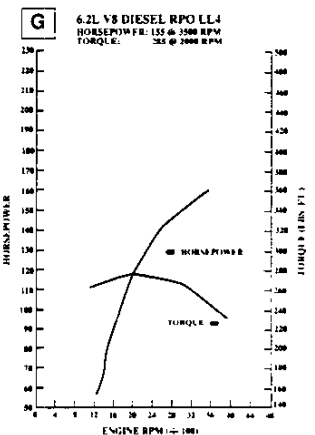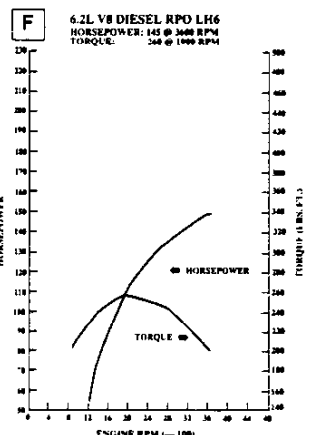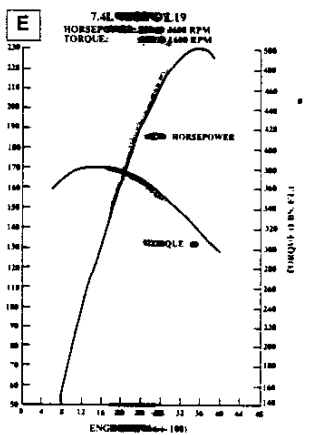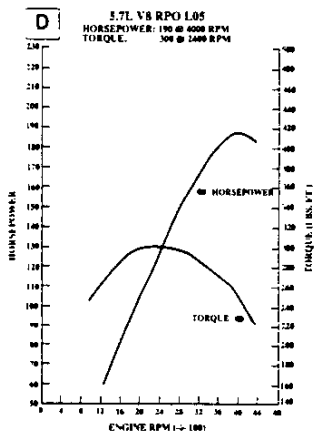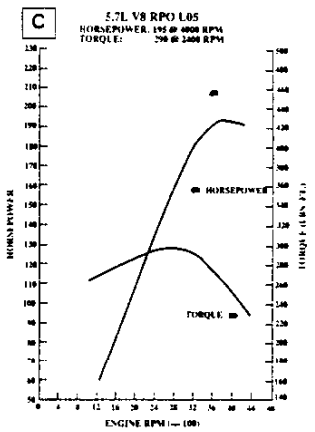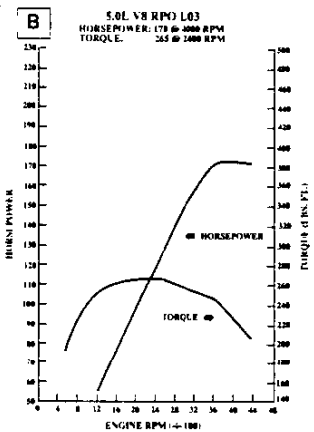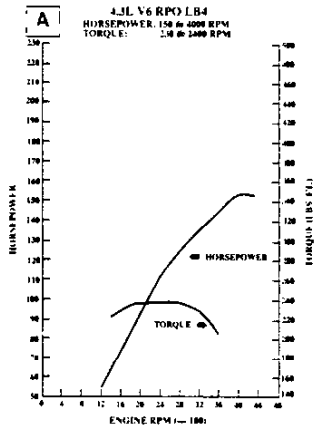

TRANSMISSION		
MODEL	AUTOMATIC 4-SPEED w/OVERDRIVE 4L80-E ¹	AUTOMATIC 4-SPEED w/OVERDRIVE 700 R4
RPO CODE	MX0	MX0
GEAR RATIOS		
First	2.48	3.06
Second	1.48	1.63
Third	1.00	1.00
Fourth	0.75	0.70
Reverse	2.08	2.29
GEAR TYPE	Planetary	Planetary
TORQUE CONVERTER		
Element Types	Pump/Stator/Turbine	Pump/Stator/Turbine
Lock-up Clutch	Automatic	Automatic
LUBRICANT CAPACITY (pints)		
Dry Fill	13.5	19
Refill	6	10

¹For Vehicles at 8600 lbs. GVWR.

REAR AXLES										
MAKE AND CAPACITY (lbs.)	GM ² 3500			GM ² 5700				GM ² 5700 Full Floating		
PINION & RING GEARS	Hypoid			Hypoid				Hypoid		
Type										
Ratio	3.08	3.42	3.73	3.23	3.42	3.73	4.10	3.42	3.73	4.10
Pinion Teeth	13	12	11	13	12	11	9	12	11	10
Ring Gear Teeth	40	41	41	42	41	41	37	41	41	41
Ring Gear Dia. (in.)	8.5	8.5	8.5	9.5	9.5	9.5	9.5	10.5	10.5	10.5
DIFFERENTIAL	2-Pinion Tapered Roller			2-Pinion Tapered Roller				2-Pinion Tapered Roller		
Type										
Bearings, Type										
AXLE SHAFTS	Semi-Floating Integral Shaft and Drive Flange			Semi-Floating Integral Shaft and Drive Flange				Full-Floating Integral Shaft and Drive Flange		
Type										
Minimum Diameter (in.)	—			—				1.38		
HOUSING @ SPRING SEAT	3.0 x .21			3.34 x .238				3.12 x .375		
Section Diameter and Thickness (in.)										

¹G80 N/A with L19 Engine.

²Refer to Standard and Optional Suspension, pages 10 and 11, for specific model availability.

MODEL	G10 SPORTVAN (110-IN. WB) (125-IN. WB)		G20 SPORTVAN (125-IN. WB)	G30 SPORTVAN (125-IN. WB)	G30 EXTENDED SPORTVAN (146-IN. WB)
MODEL NUMBER	CG11006 110-IN. WB	CG11306 125-IN. WB	CG21306/ZW9	CG31306/ZW9	CG31606/ZW9
STANDARD SUSPENSION					
PAYLOAD (Max. lbs.) ¹	1392	1071	2060	2303	2695
GVWR (lbs.)	5600		6600	7400	8600
GAWR (lbs.) Front	2906		3400	3400	3880
Rear	2906		3400	4200	5360
FRONT SUSPENSION	Independent Coil Spring		Independent Coil Spring	Independent Coil Spring	Independent Coil Spring
Type	Independent Coil Spring		Independent Coil Spring	Independent Coil Spring	Independent Coil Spring
Standard Spring Capacity (Total lbs.)	3400		3400	3400	3900
Front Shock Absorbers Piston Diameter (mm)	32		32	32	32
Front Stabilizer Bar Diameter (in.)	1.06		1.06	1.06	1.06
REAR SUSPENSION	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf
Type	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf
Standard Spring Capacity (Total lbs.)	3400		3800	4200	5360
Leaves Per Spring	5		5	5	7
Leaf Total Thickness (in.)	1.97		1.97	2.03	2.82
Rear Shock Absorbers Piston Diameter (mm)	32		32	32	32
FRONT AXLE	—		—	—	—
Type	—		—	—	—
Make	—		—	—	—
Max. Capacity (lbs.)	3400		3400	4000	4000
REAR AXLE	Semi-Floating GM		Semi-Floating GM	Semi-Floating GM	Full-Floating GM
Type	Semi-Floating GM		Semi-Floating GM	Semi-Floating GM	Full-Floating GM
Make	3500		3500	5700	5700
Max. Capacity (lbs.)	Hypoid		Hypoid	Hypoid	Hypoid
Pinion/Ring Gear Type	Hypoid		Hypoid	Hypoid	Hypoid
STANDARD TIRES	Tubeless SBR P205/75R15		Tubeless SBR P225/75R15	Tubeless SBR LT225/75R16-D 1790/2190	Tubeless SBR LT225/75R16-E 1990/2680
Capacity (lbs.)	1453		1703	1790/2190	1990/2680
Front/Rear	35		35	45/60	50/80
Inflation (psi) max. Front/Rear	769		737	706	706
Revolutions per mile @ 45 mph	15.0 x 6.00JJ		15.0 x 6.00JJ	16.0 x 6.5	16.0 x 6.5
Size (in.) Front/Rear	1585		1984	2680	2680
Capacity (lbs.)	5		5	8	8
Bolt Holes	5		5	6.5	6.5
Bolt Circle Dia. (in.)	9		4	31.75	31.75
Offset (mm)	9		4	31.75	31.75

¹Based on Curb Weight.

MODEL	G10 SPORTVAN (110-IN. WB) (125-IN. WB)		G20 SPORTVAN (125-IN. WB)	G30 H.D. SPORTVAN (125-IN. WB)	G30 EXTENDED SPORTVAN (146-IN. WB)
	CG11006	CG11306	CG21306	CG31306	CG31606/ZW9
OPTIONAL SUSPENSION					
OPTION	YCU/YCV/YCW		LH6	C6P	L19/LL4
PAYLOAD (Max. lbs.) ¹	1451	1529	1731	3582/3289	3582/3289
GVWR (lbs.)	6000		6850	8600	8600
GAWR (lbs.) Front	3166		3670	3880	4000
Rear	3166		3400	5360	5360
FRONT SUSPENSION	Independent Coil Spring		Independent Coil Spring	Independent Coil Spring	Independent Coil Spring
Type	Independent Coil Spring		Independent Coil Spring	Independent Coil Spring	Independent Coil Spring
Standard Spring Capacity (Total lbs.)	3400		3670	3900	4000
Front Shock Absorbers Piston Diameter (mm)	32		32	32	32
Front Stabilizer Bar Diameter (in.)	1.06		1.06	1.06	1.06
REAR SUSPENSION	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf
Type	Semi-Elliptic 2-Stage Multi-Leaf		Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf
Standard Spring Capacity (Total lbs.)	3400		3800	5400	5360
Leaves Per Spring	5		5	8	7
Leaf Total Thickness (in.)	1.9		2.03	3.00	2.82
Rear Shock Absorbers Piston Diameter (mm)	32		32	32	32
FRONT AXLE	—		—	—	—
Type	—		—	—	—
Make	—		—	—	—
Maximum Capacity (lbs.)	3400		3675	4000	4000
REAR AXLE	Semi-Floating		Semi-Floating	Full-Floating	—
Type	Semi-Floating		Semi-Floating	Full-Floating	—
Make	GM		GM	GM	—
Maximum Capacity (lbs.)	3500		3500	5700	5700
Pinion/Ring Gear Type	Hypoid		Hypoid	Hypoid	—
STANDARD TIRES	Tubeless SBR P215/75R15		Tubeless SBR P235/75R15	Tubeless SBR LT225/75R16-E 1990/2680	Tubeless SBR LT225/75R16-E 1990/2680
Capacity (lbs.) each	1583		1843	1990/2680	1990/2680
Front/Rear	35		3	45/60	—
Inflation (psi) max.	753		722	709	—
Revolutions per mile @ 45 mph	—		—	—	—
WHEELS	15.0 x 6.0JJ		15.0 x 6.0JJ	16.0 x 6.5	16.0 x 6.5
Size (in.) Front/Rear	15.0 x 6.0JJ		15.0 x 6.0JJ	16.0 x 6.5	16.0 x 6.5
Capacity (lbs.) each	1585		1984	2680	2680
Bolt Holes	5		5	8	8
Bolt Circle Dia. (in.)	5		5	6.5	6.5
Offset (mm)	9		4	31.75	31.75

¹Based on Curb Weight.

SPORTVAN

WHEELS AND TIRES

KEY: — - Not available
SBR - Steel-Belted Radial Ply
WW - Whitewall

WL - White Lettered
BW - Blackwall
AS - All-Season

WHEELS AND TIRES

TIRE SIZE	TYPE	RPO	PLY	LOAD RANGE	TIRE CAPACITY (lbs.) ea.	INFLATION (psi) max.	WHEEL SIZE (in.)	WHEEL CAPACITY (lbs.) ea.	BOLT HOLES	BOLT CIRCLE dia. (in.)	OFFSET (mm)	REV. PER mile@ 45 mph
P205/75R15	AS/SBR/BW Front Rear Spare	XCE YCE ZCE	—	Std.	1453	35	15.0x6.0JJ	1585	5	5	9	769
P215/75R15	AS/SBR/BW Front Rear Spare	XCU YCU ZCU	—	Std.	1583	35	15.0x6.0JJ	1585	5	5	9	753
P215/75R15	AS/SBR/WW Front Rear Spare	XCV YCV ZCV	—	Std.	1583	35	15.0x6.0JJ	1585	5	5	9	753
P215/75R15	AS/SBR/WL Front Rear Spare	XCW YCW ZCW	—	Std.	1583	35	15.0x6.0JJ	1585	5	5	9	753
P225/75R15	AS/SBR/BW Front Rear Spare	XYT YET ZET	—	Std.	1703	35	15.0x6.0JJ	1984	5	5	4	737
P225/75R15	AS/SBR/WW Front Rear Spare	XEU YEU ZEU	—	Std.	1703	35	15.0x6.0JJ	1984	5	5	4	737
P225/75R15	AS/SBR/WL Front Rear Spare	XEV YEV ZEV	—	Std.	1703	35	15.0x6.0JJ	1984	5	5	4	737
P235/75R15	AS/SBR/BW Front Rear Spare	XFL YFL ZFL	—	Std.	1843	35	15.0x6.0JJ	1984	5	5	4	722
LT225/75R16-E	AS/SBR/BW Front Rear Spare	XHF YHF ZHF	—	Std.	1990 2680	50 80	16.0x6.5	2680	8	6.5	31.75	706
LT225/75R16-D	AS/SBR/BW Front Rear Spare	XHP YHP ZHP	—	Std.	1790 2190	45 60	16.0x6.5	2680	8	6.5	31.75	706

OPTIONAL WHEELS

RPO	DESCRIPTION	WHEEL SIZE (in.)	CAPACITY	BOLT HOLES	BOLT CIRCLE dia. (in.)	OFFSET (mm)
N67 ¹	Wheels—Rally (Includes Bright Trim Rings and Special Hub Caps)	15.0 x 6.50	1843	5	5	14
PF3 ¹	Wheels—Aluminum, Cast (Includes Special Hub Caps)	15.0 x 6.50	1843	5	5	14

¹ N/A G30 Series Models.

MODEL	G10 SPORTVAN	G20 SPORTVAN	G30 SPORTVAN	G30 H.D. SPORTVAN	G30 EXTENDED SPORTVAN
MODEL NUMBER	CG11006 CG11306	CG21306	CG31306	CG31306/C6P	CG31606
STEERING					
Type	Variable Ratio Integral Power	Variable Ratio Integral Power	Variable Ratio Integral Power	Variable Ratio Integral Power	Variable Ratio Integral Power
Steering Ratio	17.2:1	17.2:1	17.2:1	17.2:1	17.2:1
Turning Diameter Curb-To-Curb (ft.)	41.3/45.9	46.0	48.5	48.5	54.0
Wall-To-Wall (ft.)	42.7/46.2	47.5	49.8	49.8	55.3
BRAKES					
GVWR (lbs.)	5600/ 6000	6600 ¹	7400	8600	8600
Type Rear Wheel Anti-Lock Braking System	Vac. Power Front Disc/ Rear Drum	Vac. Power Front Disc/ Rear Drum	Vac. Power Front Disc/ Rear Drum	Vac. Power ² Front Disc/ Rear Drum	Vac. Power ² Front Disc/ Rear Drum
Booster Diaphragm Diameter (in.)	9.5 x 8.0 Tandem	9.5 x 8.0 Tandem	9.5 x 8.0 Tandem	9.5 x 8.0 Tandem	9.5 x 8.0 Tandem
Front Rotor Size Diameter x Thickness (in.)	11.86 x 1.29	11.86 x 1.29	12.50 x 1.28	12.50 x 1.28	12.50 x 1.28
Front Facing Contact Per Axle (sq. in.)	41.88	41.88	47.12	47.12	47.12
Rear Drum Size Diameter x Width (in.)	11.15 x 2.75	11.15 x 2.75	13.0 x 2.5	13.0 x 2.5	13.0 x 2.5
Rear Facing Contact Per Axle (sq. in.)	107.42	107.42	116.73	116.73	116.73
Parking Brake Type	Cable To Rear Wheels	Cable To Rear Wheels	Cable To Rear Wheels	Cable To Rear Wheels	Cable To Rear Wheels

¹ 6850 GVWR model with LH6 engine includes Hydraulic Power Brakes without booster.



² Models with LL4 engine include Hydraulic Power Brakes without booster.

ELECTRICAL					
MODEL NUMBER	CG11006—CG21306—CG31306 CG31306/C6P—CG31606—CG11306				
ENGINE	4.3L	5.0L	5.7L	6.2L	7.4L
STANDARD BATTERY					
Cold Cranking Amps @ 0 °F	630	630	630	2 With 540 Ea.	630
@ -20 °F	470	470	470	405	470
Reserve Capacity Minutes @ 80 °F	115	115	115	115	115
STANDARD ALTERNATOR					
Maximum Capacity (Amps)	100	100	100	100	100
Maximum Watts @ 12 Volts	1200	1200	1200	1200	1200
Nominal Amp @ Idle approximately	36	36	36	36	36
Drive Pulley Ratio	3.2:1	3.2:1	3.2:1	3.0:1	3.2:1
Model Number	CS130	CS130	CS130	CS130	CS130
OPTIONAL ALTERNATOR¹	—	—	—	—	w/C69
Maximum Capacity (Amps)	—	—	—	—	105
Maximum Watts @ 12 Volts	—	—	—	—	1260
Nominal Amp @ Idle approximately	—	—	—	—	63
Drive Pulley Ratio	—	—	—	—	3.2:1
Model Number	—	—	—	—	CS130

¹NOTE: This alternator is available only as part of noted RPO.

ALTERNATOR CURVES



(Refer to Electrical Chart for Availability).

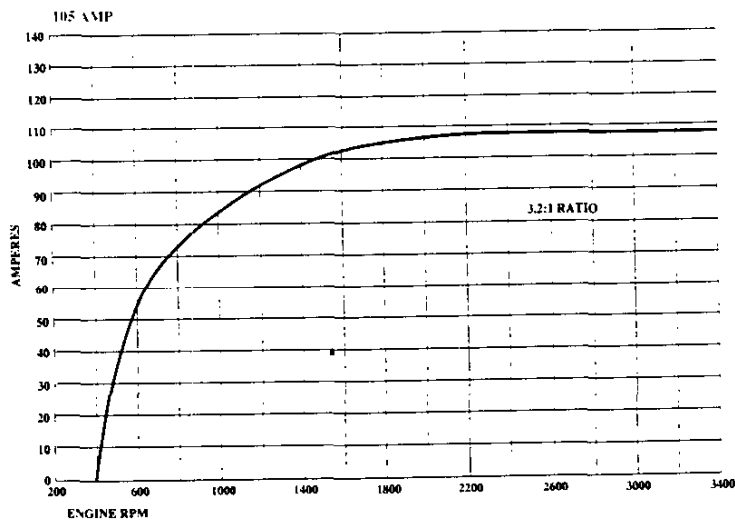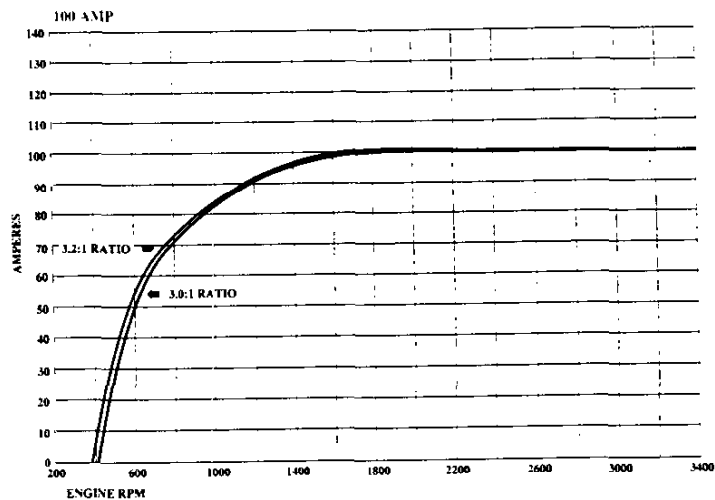

MODEL NUMBER	CG11006—CG11306—CG31306— CG31306/C6P—CG31606/C6P—CG21306				
	STANDARD COOLING SYSTEM				
ENGINE	4.3L ¹	5.0L ¹	5.7L	6.2L ²	7.4L ^{3,4}
Radiator Thickness (in.)	.93	.98	.98	1.57	1.34
System Capacity (gal.)	3.4	4.2	4.2	6.3	4.2
Fan-No. Blades x Diameter x Pitch (in.)	3 x 19 x 2.0	3 x 19 x 2.0	3 x 19 x 2.0	5 x 20 x 2.87	5 x 19.5 x 2.0
OPTIONAL COOLING SYSTEMS					
ENGINE	4.3L	5.0L	5.7L	6.2L	7.4L
OPT. H.D. RADIATOR OR AIR CONDITIONING	VO5/C60/C69				
Radiator Thickness (in.)	.93	.98	1.57	1.57	1.34
System Capacity (gal.)	3.3	4.2	4.2	6.2	5.8
Fan-No. Blades x Diameter x Pitch (in.)	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 20 x 2.0	5 x 20 x 2.56
OPT. H.D. RADIATOR AND TRANS. OIL COOLER	VO2	VO2	VO2	VO2	VO2
Radiator Thickness (in.)	1.34	1.34	1.34	1.34	1.34
System Capacity (gal.)	3.4	3.4	3.4	3.4	3.4
Fan-No. Blades x Diameter x Pitch (in.)	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0	5 x 19.5 x 2.0

¹ Not available on G30.² Not available on G10, G20 at 6600 lbs GVWR.³ Not available on G10, G20.⁴ L19 engine requires KC4 engine.

MODEL		G10 SPORTVAN	G10 SPORTVAN	G20 SPORTVAN	G30 SPORTVAN	G30 H.D. SPORTVAN	G30 EXTENDED SPORTVAN
		110-IN. WB	125-IN. WB	125-IN. WB	125-IN. WB	125-IN. WB	146-IN. WB
MODEL NUMBER		CG11006	CG11306	CG21306	CG31306	CG31306/C6P	CG31606
EXTERIOR DIMENSIONS							
BODY							
Wheelbase (in.)	WB	110.0	125.0	125.0	125.0	125.0	146.0
Overall Length (in.)	OAL	178.2	202.2	202.2	202.2	202.2	223.2
Overall Height (in.)	OAH	79.4	79.1	79.5	81.8	81.9	82.3
Maximum Width (in.)	OAW	79.5	79.5	79.5	79.5	79.5	79.5
Bumper to Axle	BA						
Front (in.)		29.6	29.6	29.6	29.6	29.6	29.6
Rear (in.)		38.5	47.5	47.5	47.5	47.5	47.5
Ground to Top of Rear Load Floor (in.)	—	24.7	24.4	24.9	27.0	27.0	29.6
Ground Clearance	—						
Front (in.)		7.4	7.2	7.8	9.6	10.0	8.9
Rear (in.)		7.9	7.7	8.6	7.3	8.5	9.6
Side Load Door	—						
Sliding (in.)		49.2	49.2	49.2	49.2	49.2	—
Opening Height		44.2	44.2	44.2	44.2	44.2	—
Opening Width		—	—	—	—	—	—
Side Load Door Swing Out (in.)	—						
Opening Height		48.5	48.5	48.5	48.5	48.7	48.7
Opening Width		46.7	46.7	46.7	46.7	46.7	46.7
—Large Door		30.3	30.3	30.3	30.3	30.3	30.3
—Small Door		19.2	19.2	19.2	19.2	19.2	19.2
Rear Load Door (in.)							
Opening Height	DH	48.8	48.8	48.8	48.8	48.8	48.8
Opening Width	DW	54.4	54.4	54.4	54.4	54.4	54.4
Step Up Height (in.)							
Front Door		17.9	17.7	18.3	19.8	19.8	20.5
Side Load Door		19.7	19.4	19.8	22.2	22.2	22.3
SIGN PANEL AREA (in.)	Shaded Area	29 x 97	29 x 121½	29 x 121½	29 x 121½	29 x 121½	29 x 142½

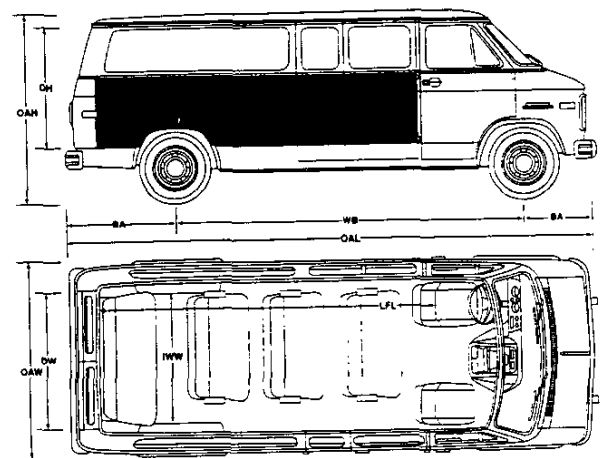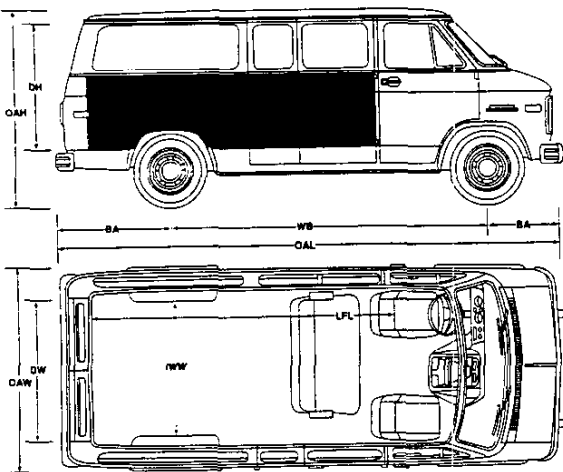

MODEL	G10 SPORTVAN	G10 SPORTVAN	G20 SPORTVAN	G30 SPORTVAN	G30 H.D. SPORTVAN	G30 EXTENDED SPORTVAN
	110-IN. WB	125-IN. WB	125-IN. WB	125-IN. WB	125-IN. WB	146-IN. WB
MODEL NUMBER	CG11006	CG11306	CG21306	CG31306	CG31306/C6P	CG31606

INTERIOR DIMENSIONS

		G10	G10	G20	G30	G30	G30
Headroom (in.) Front/ Middle 1/Middle 2/Rear	HR	40.8/ 40.9/—/—	40.8/ 40.9/—/—	40.8/ 40.9/40.7/—	40.8/ 40.9/40.7/40.1	40.8/ 40.9/40.7/40.1	40.8/ 40.9/40.7/40.1
Leg Room (in.) Front/ Middle 1/Middle 2/Rear	LR	39.5/ 37.2/—/—	39.5/ 37.2/—/—	39.5/ 37.2/39.5/—	39.5/ 37.2/39.5/40.5	39.5/ 37.2/39.5/40.5	39.5/ 37.2/39.5/40.5
Shoulder Room (in.) Front/ Middle 1/Middle 2/Rear	SR	68.8/ 63.5/—/—	68.8/ 63.5/—/—	68.8/ 63.5/—/—	68.8/ 63.5/63.5/71.0	68.8/ 63.5/63.5/71.0	68.8/63.5/ 63.5/71.0
Hip Room (in.) Front/ Middle 1/Middle 2/Rear	HP	69.7/ 51.5/—/—	69.7/ 51.5/—/—	69.7/ 51.5/51.5/—	69.7/ 51.5/51.5/63.0	69.7/ 51.5/51.5/63.0	69.7/ 51.5/51.5/63.0
Load Floor Length w/Front Seat/ w/Middle Seat 2	LFL	102.5/ 67.7	126.5/ 91.7	126.5/ 91.7	126.5/ 91.7	126.5/ 91.7	147.5 112.7
Interior Height (in.)	IH	53.0	53.0	53.0	53.0	53.0	53.0
Interior Width (in.) Beltline Between Wheelhousings	— IWW	71.0 53.5	71.0 53.5	71.0 53.5	71.0 53.5	71.0 53.5	71.0 53.5
Cargo Volume w/Front Seat (cu. ft.)	CV	207.0	260.0	260.0	260.0	260.0	306.0

FUEL TANK

Std. Tank Nominal (gal.)	22	33	33	33	33	33
Location of Tank	Behind Rear Axle	Behind Rear Axle	Behind Rear Axle	Behind Rear Axle	Behind Rear Axle	Behind Rear Axle
Location of Filler	Left Rear	Left Rear	Left Rear	Left Rear	Left Rear	Left Rear

OPTIONS

1992
SPORTVAN

KEY S - Standard
O - Optional
— Not Available

1. G10 SPORTVAN 110-IN. WB (CG11006)
2. G10 SPORTVAN 125-IN. WB (CG11306)
3. G20 SPORTVAN 125-IN. WB (CG21306)

4. G30 SPORTVAN 125-IN. WB (CG31306)
5. G30 H.D. SPORTVAN 125-IN. WB (CG31306/C6P)
6. G30 EXT. SPORTVAN 146-IN. WB (CG31606)

				MODELS					
				2-WHEEL DRIVE					
OPTION	CODE	DESCRIPTION	RESTRICTIONS	1	2	3	4	5	6
AIR CONDITIONING									
Front and Rear	C60 C69	Incl w/C69 Front and Rear Air Incls C60 Front Air	G10—E94 Beauville w/L03/L05 Eng reqs P215/75R15 Tires G30N/A ZP3 Seating	O O	O O	O O	O O	O O	O O
AXLES, REAR Locking Differential	G80	(See Powertrains)		O	O	O	O	O	O
COLD CLIMATE PACKAGE	V10	Incls Engine Block Heater and Increased Anti-Freeze Protection	N/A w/Diesel Engine	O	O	O	O	O	O
CONVENIENCE PACKAGE Driver's	ZQ3	Comfortilt Steering Wheel and Electronic Speed Control		O	O	O	O	O	O
Operating	ZQ2	Incls AU3 Power Door Locks Plus Power Windows		O	O	O	O	O	O
COOLING SYSTEM Engine Oil	KC4	Incl w/Z82 Trailing	Reqs LB4 Eng w/ G10 models; w/L03 or L05 Eng reqs V02 H.D. Cooling LB4 Eng reqs KC4 Engine Oil Cooler.	O	O	O	O	O	O
Radiator and Transmission Heavy-Duty	V02	Incl w/Z82 Trailing. Incls H.D. Radiator and H.D. Trans Oil Cooler		O	O	O	O	O	O
Heavy-Duty Radiator	V05		LB4 Eng reqs KC4 Engine Oil Cooler; N/A C60, C69 Air or VQ2 Cooling.	O	O	O	O	O	O
DECOR PACKAGE	E94	Beauville	See Trim Level Pages	O	O	O	O	O	O
DEFOGGER	C49	Rear Window		O	O	O	O	O	O
DOOR LOCK SYSTEM, Power	AU3	Incl w/ZQ2 Conv Pkg		O	O	O	O	O	O
DOOR, SIDE	E24 YA2	Swing-Out Sliding	Standard Opt at no extra cost	S O	S O	S O	S O	S O	S O
ENGINES 4.3-liter V6 EFI 5.0-liter V8 EFI 5.7-liter V8 EFI 7.4-liter V8 EFI 6.2-liter V8 HD Diesel 6.2-liter V8 Diesel	LB4 L03 L05 L19 LL4 LH6*	(See Powertrains)	N/A CG11306 at 5600 lbs GVWR N/A CG11306 at 5600 lbs GVWR w/ 6800 lbs. GVWR only.	S O — — — —	S O — — — —	S O — — — —	— — — — — —	— — — — — —	— — — — — —
GLASS	AJ1	Heavily Tinted		O	O	O	O	O	O
HEATER Rear Seat	C36	Located on Left Side Forward of Rear Wheelhouse		O	O	O	O	O	O
LIGHTING, AUXILIARY	TR9	Incl Reading Lamps, Front and Rear Dome Lamps, Underhood Lamp, and Headlamp Warning Buzzer		O	O	O	O	O	O
LOCK, REMOTE Keyless Entry System	AX3	Remote transmitter activation for door lock/unlock. Incls headlamp delay.	Reqs AU3 Door Lock System or ZQ2 Conv. Group. Also reqs TR9 Lighting.	O	O	O	O	O	O
MIRRORS, EXTERIOR Electric, Stainless Steel	D45 DG9	Below-Eye-Line Type; Stainless Steel 6.5" x 9.0" Below Eye-Line Type; Remote Control Electric 6.5" x 9"	Reqs ZQ2 Convenience Group	O O	O O	O O	O O	O O	O O
MIRRORS, INTERIOR	DH6	Lighted R.H. & L.H. Visor Vanity	Reqs E94 Beauville Package	—	O	O	O	O	O
PAINT, EXTERIOR Solid Two-tone	ZY1 ZY4	(See Color and Trim)		S —	S O	S O	S O	S O	S O
RADIO EQUIPMENT Electronically-Tuned AM/FM Stereo Radio w/Seek-Scan and Digital Clock	UM7	14 Presets, Digital Display, two 4" x 6" Front Speakers/ two 4" x 10" Rear Speakers, 28 Watts Total Power Output		O	O	O	O	O	O
Electronically-Tuned AM/FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape and Digital Clock	UM6	14 Presets, Digital Display, two 4" x 6" Coaxial Front Speakers/ two 4" x 10" ERS, 28 Watts Total Power Output		O	O	O	O	O	O
Electronically-Tuned AM Stereo FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape w/Search-Repeat, Graphic Equalizer and Digital Clock	UX1	14 Presets, Digital Display, two 4" x 6" Coaxial Front Speakers/ two 4" x 10" ERS Rear Speakers, 28 Watts Total Power Output		O	O	O	O	O	O
Power Radio Antenna Radio Delete	U75 UL5			O O	O O	O O	O O	O O	O O

* LH6 6.2 Liter V8 Diesel not available for registration in California.

SPORTVAN

OPTIONS

KEY S - Standard
O - Optional
— Not Available

1. G10 SPORTVAN 110-IN. WB (CG11006)
2. G10 SPORTVAN 125-IN. WB (CG11306)
3. G20 SPORTVAN 125-IN. WB (CG21306)


4. G30 SPORTVAN 125-IN. WB (CG31306)
5. G30 H.D. SPORTVAN 125-IN. WB (CG31306/C6P)
6. G30 EXT. SPORTVAN 146-IN. WB (CG31606)

OPTION	CODE	DESCRIPTION	RESTRICTIONS
SEATING, REAR One Additional Seat	AQ3	3-Passenger Bench Seat Provides 8-Passenger Seating on 125" W.B. Models	
Two Additional Seats	AQ4	Incls AQ3 and 4-Passenger Rear Seat for 12-Passenger Seating	Reqs C6P w/G30
Three Additional Seats	ZP3	15-Passenger Seating; Incls AQ3 Additional Rear Seat	CG31606 Models only. N/A w/C69 Air Conditioning
Additional Seat Not Desired	YG4		
SPECIAL TRAILERING EQUIPMENT	Z72	Light-Duty; Incls Deadweight Trailer Hitch and 5-Lead Wiring Harness	
	Z82	Heavy-Duty; Incls Weight Distributing Platform Hitch and 7-Lead Wiring Harness and H.D. Flasher	N/A LB4 Eng; w/L03 or L05 Eng also incls. KC4 Engine Oil Oil Cooler and V02 H.D. Radiator and Transmission Cooler; N/A ZP3 Seating
STEERING WHEEL Leather-Wrapped	NP5	Base wheel modified with leather	
TIRE EQUIPMENT		(See Wheels and Tires for Details)	
P205/75R15 BW	XCE YCE ZCE	All Season, Steel Belted Radials	N/A w/G20-30 models
P215/75R15 BW	XCU YCU ZCU	All Season Steel Belted Radials	N/A w/ G20-30 models
P215/75R15 WS	XCV YCV ZCV	All Season Steel belted Radials	N/A w/G20-30 models
P215/75R15 RWL	XCW YCW ZCW	All Season Steel Belted Radials	N/A w/ G20-30 models
P225/75R15 BW	XET YET ZET	All Season steel Belted Radials	N/A w/Diesel Engines
P225/75R15 WS	XEU YEU ZEU	All Season Steel Belted Radials	N/A w/Diesel Engines
P225/75R15 RWL	XEV YEV ZEV	All Season Steel Belted Radials	N/A w/Diesel Engines
P235/75R15 BW	XFL YFL ZFL	All Season Steel Belted Radials	Reqs LH6 6.2L Diesel Eng
LT225/75R16D BW	XHP YHP ZHP	All Season Steel Belted Radials	Reqs L05 Eng, CG31306, and 7400 lb. GVWR
LT225/75R16E BW	XHF YHF ZHF	All Season Steel Belted Radials	
TRANSMISSIONS 4-Speed Automatic	MX0	(See Powertrains) With Overdrive	
TRAVEL BED SEATING PACKAGE	B6S	Replaces Std Bench Seat When in use Bed is 74.7" long by 55.6" wide.	Reqs Blue or Beige Custom Trim; on G20/30 models reqs Additional Seat or YG4 Seat Not Desired; w/YG4 Seat Not Desired Replaces Standard Bench Seat; w/AQ3 Seat Replaces the AQ3 Seat; N/A with AQ4 seat
WHEELS Aluminum Rally	PF3 N67	(See Wheels and Tires) 15" x 6.5" Incls Matching Spare Wheel	15" x 6" Steel Spare Wheel
WHEEL COVERS	P01	Bright metal, Full cover	

MODELS					
2-WHEEL DRIVE					
1	2	3	4	5	6
—	—	—	O	O	—
—	—	—	S	O	—
—	—	—	—	—	O
—	—	O	—	O	O
O	O	O	O	O	O
—	—	O	O	O	O
O	O	O	O	O	O
S	S	—	—	—	—
O	O	—	—	—	—
O	O	—	—	—	—
O	O	—	—	—	—
—	—	S	—	—	—
—	—	O	—	—	—
—	—	O	—	—	—
—	—	O	—	—	—
—	—	—	S	—	—
—	—	—	—	S	S
S	S	S	S	S	S
—	O	O	—	O	—
O	O	O	—	—	—
O	O	O	—	—	—
—	—	—	O	O	O

**SOLID
COLOR
(ZY1)**

Solid paint (ZY1) is standard on all models. All painted areas of the body are the same color. The only available Color Code 1/Color Code 2 exterior paint combinations are those displayed in the chart below. Recommended interior trim colors are indicated by the symbol ●. However, any interior trim color may be ordered if desired by the customer. For more information, refer to Seats and Interior Trim pages as well as the Truck Order Guide.

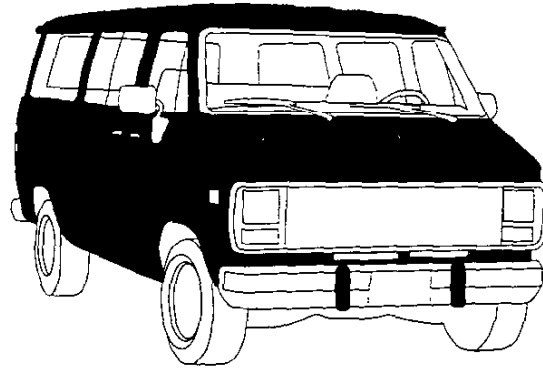


KEY: ●—Recommended Blank—Available

EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS			
COLOR CODE 1	COLOR CODE 2		Blue	Garnet	Beige	Gray
12 Frost White	12 Frost White	—	●	●	●	●
19 Midnight Black	19 Midnight Black	—	●	●	●	●
26 Sky Blue	26 Sky Blue	—	●			
37 Wheat	37 Wheat	—			●	
47 Royal Blue Met.	47 Royal Blue Met.	—	●			●
51 Sedona Tan	51 Sedona Tan	—			●	
54 Blue Spruce Met.	54 Blue Spruce	—			●	●
72 Apple Red	72 Apple Red	—		●	●	●
78 Burgundy Met.	78 Burgundy Met.	—		●	●	●
90 Steel Gray Met.	90 Steel Gray Met.	—	●	●	●	●

**DELUXE
TWO-TONE
(ZY4)**

Color Code 2

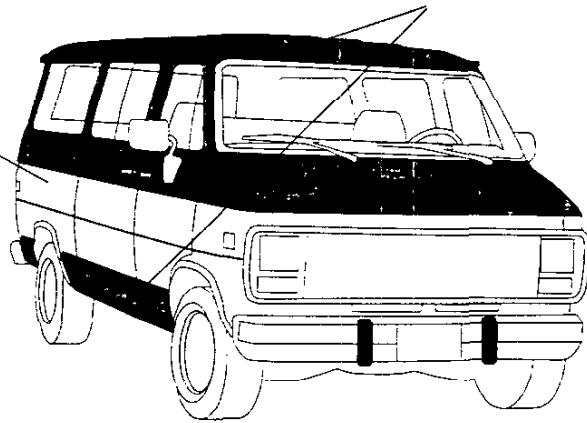

Deluxe two-tone Paint (ZY4) paint colors include black body side and rear moldings with bright trim (except with Beauville models where bright body side and rear moldings with black trim are already included). Color code 1 is applied to the areas above the belt line styling crease line and below the moldings. Color code 2 is applied to the areas between the belt line styling crease line and the moldings and in front of the wheelwell. A two-color decal accent stripe is used at the upper paint break. The only available Color Code 1/Color Code 2 exterior paint combinations are those displayed in the chart below. Recommended interior trim colors are indicated by the symbol •. However, any interior trim color may be ordered if desired by the customer. For more information, refer to Seats and Interior Trim pages as well as the Truck Order Guide.

KEY: • — Recommended Blank — Available

EXTERIOR COLORS		STRIPE COLORS	INTERIOR COLORS			
COLOR CODE 1	COLOR CODE 2		Blue	Garnet	Beige	Gray
12 Frost White	26 Sky Blue	Lt. Blue/Dk. Blue/Lt. Blue	•			
	47 Royal Blue Met.	Lt. Blue/Dk. Blue/Lt. Blue	•			
	72 Apple Red	Vermillion/Dk. Carmine/Vermillion		•		
	72 Apple Red	Vermillion/Slate/Vermillion				•
	90 Steel Gray Met.	Silver/Black/Silver				•
19 Midnight Black	12 Frost White	Vermillion/Dk. Carmine/Vermillion		•		
	12 Frost White	Vermillion/Slate/Vermillion				•
	72 Apple Red	Vermillion/Dk. Carmine/Vermillion		•		
	72 Apple Red	Vermillion/Slate/Vermillion				•
	90 Steel Gray Met.	Vermillion/Slate/Vermillion				•
26 Sky Blue	12 Frost White	Lt. Blue/Dk. Blue/Lt. Blue	•			
	47 Royal Blue Met.	Lt. Blue/Dk. Blue/Lt. Blue	•			
37 Wheat	51 Sedona Tan	Gold/Black/Gold			•	
54 Blue Spruce Met.	12 White Frost	Silver/Black/Silver				•
	90 Steel Gray Met.	Silver/Black/Silver				•
47 Royal Blue Met.	12 Frost White	Lt. Blue/Dk. Blue/Lt. Blue	•			
	26 Sky Blue	Lt. Blue/Dk. Blue/Lt. Blue	•			•
	90 Steel Gray Met.	Lt. Blue/Dk. Blue/Lt. Blue				•
51 Sedona Tan	37 Wheat	Dk. Brown/Doeskin/Dk. Brown			•	
72 Apple Red	12 Frost White	Vermillion/Slate/Vermillion		•		•
	19 Midnight Black	Vermillion/Slate/Vermillion				•
	19 Midnight Black	Vermillion/Dk. Carmine/Vermillion		•	•	
	90 Steel Gray Met.	Vermillion/Slate/Vermillion		•		•
	90 Steel Gray Met.	Vermillion/Dk. Carmine/Vermillion			•	
78 Burgundy Met.	12 Frost White	Vermillion/Dk. Carmine/Vermillion		•		•
90 Steel Gray Met.	12 Frost White	Silver/Black/Silver				•
	12 Frost White	Vermillion/Slate/Vermillion		•		
	19 Midnight Black	Vermillion/Slate/Vermillion	•	•	•	•
	19 Midnight Black	Vermillion/Dk. Carmine/Vermillion	•	•		•