
SPORTVAN/RALLY MODEL SELECTOR

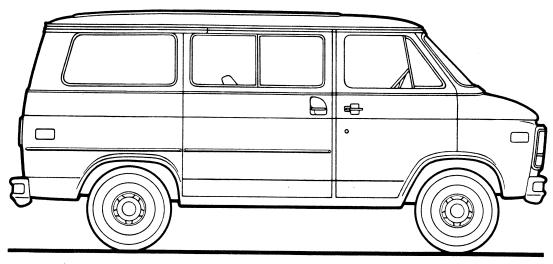


SEDIES	MODEL	NUMBER	BODY ORDERING CODE					
SERIES	110" WB	125" WB	SPORTVAN/ RALLY	*BONAVENTURE/ RALLY CUSTOM	*BEAUVILLE/ RALLY STX			
		GASO	LINE MODELS					
+G10/1500	G11006	G11306	ZW9	ZW9 ZM2		ZW9 ZM2		
G20/2500		G21306	ZW9	ZM2	E94			
-G30/3500		G31306	ZW9	ZM2	E94			
G30/3500/C6P		G31306	ZW9/C6P	ZM2/C6P	E94/C6P			
		DIE	SEL MODELS					
G20/2500		G21306	ZW9/B3J	3J ZM2/B3J E				
G30/3500/C6P		G31306	ZW9/C6P/B3J					

*125" WB models only.

♦ Not available for registration in the State of California.

•Model G31306 without C6P has RPO AQ4—Two Additional Rear Seats—included as standard equipment to provide 12-passenger seating.

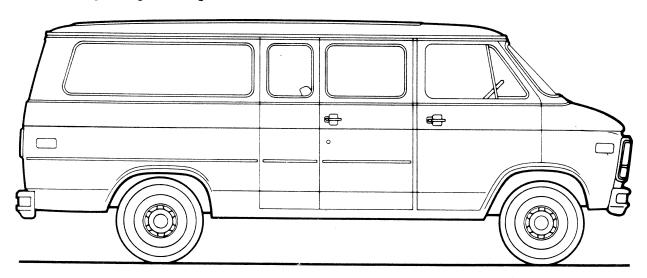

GASOLINE

SPORTVAN/RALLY

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	G10/1500∎	G20/2500					
Engine Base Familia	4.1.1.1.1.00	20.01111.0					
Base Equip.	4.1 Liter, 250 2-bbl L6						
Clutch	11"; 124 sq. in.						
Air Filter	Oiled-pape						
Oil Filter	Throwaway Type						
Exhaust System	Single; Aluminized						
Emission Control	- · J · ,						
Systems	See Engine & Cooling section	for specific model applications					
Suspension, Front	Independent; Coil Springs						
Capacity	3400 lb.	3400 lb.					
Springs @ Ground	1700 lb. ea.	1700 lb. ea.					
Shock Absorbers	25mm dia.	25mm dia.					
Stabilizer Bar	-	-					
Suspension, Rear	Salisbury Axle; Hypoid Drive;	: Two-stage Multi-leaf Springs					
Axle Capacity	3500 lb. 3500 lb.						
Axle Ratio	3.42	3.42					
Springs @ Ground	1700 lb. ea.	1700 lb. ea.					
Shock Absorbers	25mm dia.	25mm dia.					
Brakes	Hydraulic; Self-adjusting						
Front	Disc; 11.86" Rotor Disc; 11.86" Rotor						
Rear	Drum; 11" x 2"	Drum; 11.15" x 2.75" Dual Diaphragm					
Booster	Single Diaphragm						
Parking	Cable to Re						
Electrical	12 Volt; Nega	ative Ground					
Battery — Freedom Type	405 CCA	A @ O°F					
-Reserve Capacity	75 min. (
Delcotron Generator	37 a:						
Frame	Integral Bo						
Fuel Tank (nominal							
capacity)	22 ડ્	gal.					
Steering Gear Type	Integral Power						
Transmission Shift Location	Fully Synchronized 3-Speed Manual Floor						
Tires	(5) P205/75R15	(4) P225/75R15					
Wheels	(5) Disc 15" x 6.0"	(5) Disc 15" x 6.0"					

[■] Not available for registration in the State of California

[♦]CCA-Cold Cranking Amps

STANDARD SPECIFICATIONS



(See Gray Tab Section for Specification Details)

Series▲	G20/2500
Engine	
Base Equip.	6.2 Liter, 379 Cu. In. V8 Diesel
Clutch	12"; 150 sq. in.
Air Filter	Poly-wrapped, Oiled-paper Element
Oil Filter	Throwaway Type
Oil Cooler	Standard
Exhaust System	Dual; Aluminized
Emission Control	Duai, Aluminizea
Systems	See Engine & Cooling section for specific model applications
Suspension, Front	Independent; Coil Springs
Capacity	3675 lb.
Springs @ Ground	1835 lb. ea.
Shock Absorbers	25mm dia.
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs
Axle Capacity	3500 lb.
Axle Ratio	3.08
Springs @ Ground	1700 lb. ea.
Shock Absorbers	25mm dia.
Proloce	
Brakes	Hydraulic; Self-adjusting
Front	Disc; 11.86" Rotor
Rear	Drum; 11.15" x 2.75"
Booster	Hydraulic Power
Parking	Cable to Rear Wheels
Electrical Battery — Freedom	12 Volt; Negative Ground
Type	Two; 550 CCA ♦ ea. @ 0°F.
-Reserve Capacity	115 min. ea. @ 80°F.
Delcotron Generator	66 amp.
Engine Block Heater	600 watts, 120 volts
Frame	Integral Body-frame
Fuel Tank (nominal	
capacity)	22 gal.
Standing Co. M	
Steering Gear Type	Integral Power
Transmission	4-Speed Manual w/Overdive
Shift Location	Floor
Tires	(4) P235/75R15
Wheels	(E) D:
	(5) Disc
	15" x 6.0"

▲ Note: G10/1500 models not available with diesel engine

♦CCA-Cold Cranking Amps

GASOLINE

SPORTVAN/RALLY

STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	G30/3500-	G30/3500/C6P					
Engine							
Base Equip.	5.7 Liter, 350 4-bbl V8						
Air Filter	Oiled-pape	er Element					
Oil Filter	Throwaw	vay Type					
Exhaust System	Single; Aluminize	d; w/dual tail pipe					
Emission Control							
Systems	See Engine & Cooling section	for specific model applications					
Suspension, Front	Independent; Coil Springs						
Capacity	3900 lb. 3900 lb.						
Springs @ Ground	1700 lb. ea.	1950 lb. ea.					
Shock Absorbers	25mm dia.	25mm dia.					
Stabilizer Bar	1.06" dia.	1.06" dia.					
Suspension, Rear	Salisbury Axle; Hypoid Drive;	Two-stage Multi-leaf Springs					
Axle Capacity	5700 lb.	5700 lb.					
Axle Ratio	3.23	3.73					
Springs @ Ground	2100 lb. ea.	2700 lb. ea.					
Shock Absorbers	25mm dia.	25mm dia.					
Brakes	Hydraulic; Self-adjusting						
Front	Disc; 12.1						
Rear	Drum; 13						
Booster	Dual Dia	iphragm					
Parking	Cable to Re	ear Wheels					
Electrical Battery – Freedom	12 Volt; Nega	itive Ground					
Туре	390 CCA	♦ @ 0°F.					
-Reserve Capacity	90 min.	@ 80°F.					
Delcotron Generator	37 a	mp.					
Frame	Integral Bo	ody-frame					
Fuel Tank (nominal							
capacity)	22 g	gal.					
Steering Gear Type	Integral	Power					
Transmission	<u> </u>						
Shift Location	Steering Column	Steering Column					
Tires	(4) 8.75R-16.5D(8PR) (4) 8.75-16.5E(10PR)						
Wheels	(5) Disc						
	16.5" x 6.75"						

[•]Model G31306 without C6P has RPO AQ4—Two Additional Rear Seats—included as standard equipment to provide 12-passenger seating.

[♦]CCA-Cold Cranking Amps

STANDARD SPECIFICATIONS



(See Gray Tab Section for Specification Details)

Series▲	G30/3500/C6P						
Engine							
Base Equip.	6.2 Liter, 379 Cu. In. V8 Diesel						
Air Filter	Poly-wrapped, Oiled-paper Element						
Oil Filter	Throwaway Type						
Oil Cooler	Standard						
Exhaust System	Dual; Aluminized						
Emission Control	Duai, Aluminizea						
Systems	Soo Engine & Cooling postion for an existing we delicate						
by stems	See Engine & Cooling section for specific model applications						
Suspension, Front	Independent; Coil Springs						
Capacity	3900 lb.						
Springs @ Ground	1950 lb. ea.						
Shock Absorbers	25mm dia.						
Stabilizer Bar	1.06" dia.						
Suspension, Rear	Salisbury Axle; Hypoid Drive; Two-stage Multi-leaf Springs						
Axle Capacity	5700 lb.						
Axle Ratio	3.73						
Springs @ Ground	2700 lb. ea.						
Shock Absorbers	25mm dia.						
Brakes	Hydraulic; Self-adjusting						
Front	Disc; 12.5" Rotor						
Rear	Disc, 12.3 Rotor Drum; 13" x 2.5"						
Booster							
Parking	Hydraulic Power						
Farking	Cable to Rear Wheels						
Electrical	12 Volt; Negative Ground						
Battery — Freedom	, j						
Type	Two; 550 CCA♦ ea. @ 0°F.						
-Reserve Capacity	115 min. ea. @ 80°F.						
Delcotron Generator	66 amp.						
Engine Block Heater	600 watts, 120 volts						
	OOO Walts, 120 Volts						
Frame	Integral Body-frame						
Fuel Tank (nominal							
capacity)	22 gal.						
Steering Gear Type	Integral Power						
Transmission	3-Speed Automatic						
Shift Location	Steering Column						
Tires	(4) 8.75-16.5E(10PR)						
Wheels	(5) Disc						
	16.5" x 6.75"						


 \blacktriangle Note: G30/3500 models without C6P not available with diesel engine.

♦CCA-Cold Cranking Amps

GASOLINE

SPORTVAN/RALLY

Body Ordering Codes: Sportvan/Rally—ZW9 Bonaventure Sportvan/Rally Custom—ZM2‡ Beauville Sportvan/Rally STX-E94‡

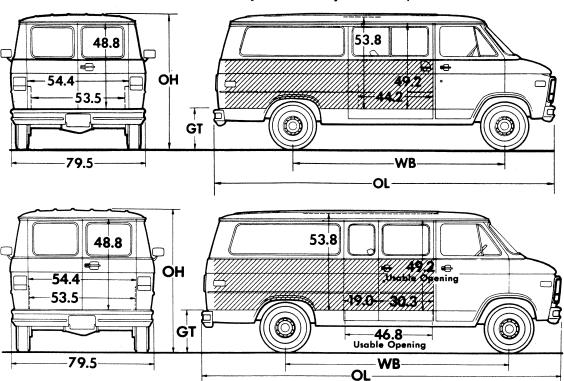

Side slide-in opening clearance 44.2'' with sliding door; 46.8'' with swing out doors; max. box cargo height 49.2''with standard front passenger seat.

Rear slide-in opening clearance 52" with spare tire in position or 53.5" with spare tire removed; height 48.8".

Sign Panel Area (side)	V111111
Sign Panel Area (side) 110" WB-29" x 97" 125" WB-29" x 121½"	
125" WB - 29" x 121½"	<i>(///////</i>

Series		ound nce (in)†
	Front	Rear
Gl	6.3	6.7
G2	7.3	7.3
G3	9.0	7.0


Model	Engine No.	D	imensi	sions (in)†		‡Curb Weight (lb)		‡Model Weight (lb)*			
Model	Cyl.		OL	ОН	GT	Front	Rear	Total	Front	Rear	Total
					G10/	1500 SE	RIES				
G11006	6	110	178.2	79.4	25.0	2293	1792	4085	2688	2147	4835
G11306	6	125	202.2	79.2	24.6	2349	1905	4254	2784	2220	5004
					G20/	2500 SI	RIES				
G21306	6	125	202.2	79.5	25.1	2355	1922	4277	2790	2237	5027
					G30/	3500 SI	RIES				
G31306=	8	125	202.2	81.9	28.0	2584	2404	4988	3075	3713	6788
G31306 (w/C6P)	8	125	202.2	81.9	28.0	2558	2171	4729	2993	2486	5479

†Dimensions with standard equipment, unloaded.
*Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.
‡Curb Weights and Model Weights shown are for models with ZW9 Sportvan/Rally body. For models with E94 Beauville Sportvan/Rally STX body add: for Front 42 lb.; Rear 104 lb.; Total 146 lb. For models with ZM2 Bonaventure/Rally Custom body add: Front 25 lb.; Rear 76 lb.;
Total 101 lb.

Model G31306 without C6P has RPO AQ4—Two Additional Rear Seats—included as standard equipment to provide 12-passenger seating.

DIESEL

Body Ordering Codes: Sportvan/Rally—ZW9/B3J Bonaventure Sportvan/Rally Custom-ZM2/B3J‡ Beauville Sportvan/Rally STX—E94/B3J‡

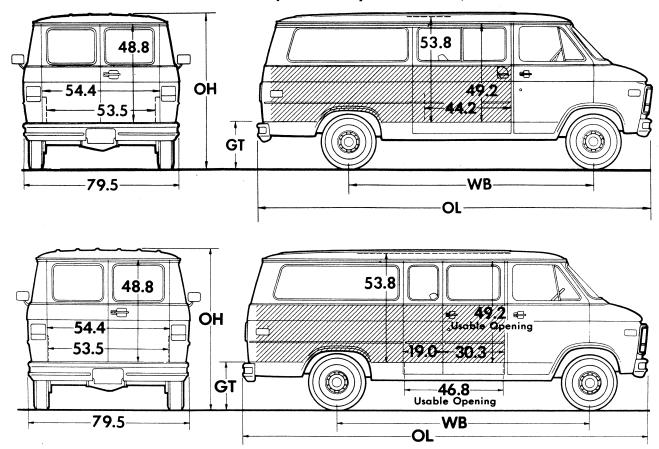

Side slide-in opening clearance 44.2'' with sliding door; 46.8'' with swing out doors; max. box cargo height 49.2'' with standard front passenger seat.

Rear slide-in opening clearance 52" with spare tire in position or 53.5" with spare tire removed; height 48.8"

Series	Gre Cleara	ound nce (in)†
	Front	Rear
G2	7.3	7.3
G3	9.0	7.0

Sign Panel Area (side)	V/////////////////////////////////////
Sign Panel Area (side) 110" WB – 29" x 97" 125" WB – 29" x 1214"	

Engine No.		Dimensions (in)†			‡Curb Weight (lb)			‡Model Weight (lb)*			
Model	Cyl.	WB	OL	ОН	GT	Front	Rear	Total	Front	Rear	Total
G20/2500 SERIES											
G21306	8	125	202.2	79.5	25.1	2802	1982	4784	3237	2297	5534
					G30/	3500 SE	RIES				
G31306 (w/C6P)	8	125	202.2	81.9	28.0	2866	2225	5091	3301	2540	5841

†Dimensions with standard equipment, unloaded.
*Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as

±50 lbs. to allow for production build variation.

‡Curb Weights and Model Weights shown are for models with ZW9 Sportvan/Rally body. For models with E94 Beauville Sportvan/Rally STX body add: for Front 64 lb.; Rear 205 lb.; Total 269 lb. For models with ZM2 Bonaventure/Rally Custom body add: Front 30 lb.; Rear 100 lb.; Total 130 lb.

POWER TEAMS

ALL STATES EXCEPT CALIFORNIA*

G10/1500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)

ENGINE	TRANS	MISSION		GVWR			
	3-SP	AUTO	2.73	3.08	3.42	3.73	
W/NA5 STANDARD	EMISSION EQUI	PMENT					
LE3 L6 4.1 Liter	MM3	MXO	_	_	GQ1	GT4	56/6000
250-2BBL)		MX1		GQ1	GU6	-	56/6000
E9 V8		MXO	_	GQ1	GU6	_	56/6000
5.0 Liter 305-4 BBL)		MX1	*GQ1	*GU4	-	-	56/6000
S9 V8 5.7 Liter 350-4BBL)	h	MX0	GQ1	GU4	-	-	56/6000
W/NA6 HIGH ALTIT	UDE EMISSION I	QUIPMENT					
LE3 L6 4.1 Liter (250-2BBL)	MM3	MX0/1		-	GQ1	GT4	56/6000
LE9 V8 5.0 Liter (305-4BBL)		MX0/1	-	GQ1	GU6	-	56/6000
(350-4-8BL)		MX0	GQ1	GU4	-	-	56/6000

[◆]G10/1500 Sportvan/Rally not available for registration in the state of California. *G11306 2.73 Axle is not available; 3.08 Axle is Base

GVWR SELECTOR—ALL STATES EXCEPT CALIFORNIA*

G10/1500 SERIES

GVW	†GAW	P (lbs)	Mir	imum Equipment l	Required for GVW Rating
Rating	GAW	(1D2)	Tire Capacity (lbs ea)		Chassis Equipment
(lbs)		Front	Rear		
5600	2906	2906	1453	1453	Standard
6000	3166	3166	1583	1583	HD Power Brakes (J55)

[†]GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES EXCEPT CALIFORNIA

G10/1500 SERIES

Spare tire to match either front or rear tires must be ordered.

	Capacity	Capacity Highway		On-Off Road	Spare
Description	(lbs ea)	Front	Rear	Rear	
TUBELESS					
P205/75R15 Fiberglass Belted Radial	1453	XAY —	YAY —	*YJT	ZAY *ZJT
P205/75R15 Whitewall Fiberglass Belted Radial	1453	XAZ	YAZ	_	ZAZ
P215/75R15 Steel Belted Radial	1583	XKT	YKT	_	ZKT
P215-75R15 Whitewall Steel Belted Radial	1583	XKU	YKU	_	ZKU
P215/75R15 White Letter Steel Belted Radial	1583	XVM	YVM		ZVM

[◆]G10/1500 Sportvan/Rally not available for registration in the state of California.

ENGINE RATINGS ALL STATES

SAE Net Ratings	#*4.1 Liter	#*5.0 Liter	*5.7 Liter	**5.7 Liter
	250 2-bbl L6	305 4-bbl V8	350 4-bbl V8	350 4-bbl V8
Net Horsepower Net Torque, lb-ft	115 @ 3600 rpm	160 @ 4400 rpm	165 @ 3800 rpm	▲160 @ 3800 rpm
	200 @ 2000 rpm	235 @ 2000 rpm	275 @ 1600 rpm	▲250 @ 2800 rpm

SAE Net Ratings	*6.2 Liter 379 V8 Diesel	**6.2 Liter 379 V8 Diesel
Net Horsepower	130 @ 3600 rpm	135 @ 3600 rpm
Net Torque, lb-ft	240 @ 2000 rpm	240 @ 2000 rpm

^{*}Engine with Light or Medium Duty Emissions (w/GVWR up to 8500 lb.)
**Engine with Heavy Duty Emissions (w/GVWR over 8500 lb.)

Sportvan/Rally—Page 8 General Motors Cor

#Not available for registration in the state of California.

^{*}Steel Belted Radial.

[▲]For California: 155 @ 4000 240 @ 2800

POWER TEAMS

ALL STATES EXCEPT CALIFORNIA

G20/2500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)

ENGINE	TRANSMISSION		AXLES				GVWR	
	3-SP	4-SP	AUTO	2.73	3.08	3.42	#3.73	GIVIII
W/NA5 STANDARD E	MISSION E	QUIPMI	ENT		<u> </u>		<u> </u>	
LE3 L6 4.1 Liter	MM3		MX0			GQ1	#GT4	6600
(250-2BBL)			MX1	_	_	GQ1	_	6600
LE9 V8 5.0 Liter			MX0	_	GQ1	GU6	*GT4	6600
(305-4BBL)			MX1	\$GQ1	\$GU4	_	_	6600
LS9 V8 5.7 Liter (350-4BBL)			MXO	GQ1	GU4	_	_	6600
LH6 Diesel 6.2 Liter V8		MM7		_	_	GQ1	_	6850
(379 Cu. In.)(Reqs B3J)			MX0	-		GQ1	*GT4	6850
W/NA6 HIGH ALTITU	DE EMISSIC	N EQUI	PMENT					
LE3 L6 4.1 Liter (250-2BBL)	ммз		MX0/1	_	_	GQ1	#GT4	6600
E9 V8 5.0 Liter			MX0		-	GQ1	#GT4	6600
(305-4BBL)			MX1		GQ1	_	#GT4	6600
.S9 V8 5.7 Liter 350-4BBL)			MXO	GQ1	GU4		-	6600
H6 Diesel 3.2 Liter V8		MM7		_	_	GQ1	_	6850
379 Cu. In.)(Regs B3J)	1		MX0	_		GQ1	*GT4	6850

^{*}Reqs Z82 Trailering Special; N/A G80 Locking Differential \pm N/A G80 Locking Differential

G30/3500 SERIES

ENGINE	TRANSMISSION		AXLES		GVWR
	AUTO	3.23	3.73	4.10	
W/NA5 STANDARD, NA6	HIGH ALTITUDE EM	ISSION EQUIPMEN	Т		
LS9 V8 5.7 Liter (350-4 BBL)(N/A C6P)	MXO	GQ1	† –	_ [7400
LT9 V8 5.7 Liter (350-4BBL)(Reqs C6P)	MX0/1	-	GQ1	GT5	8600
LL4 Diesel 6.2 Liter V8 (379 Cu.In.) (Reqs C6P and B3J)	MX0/1	<u> </u>	GQ1	GT5	8600

^{*}N/A NA6 High Altitude Emission. With NA5 Standard Emission Satisfies High Altitude Emission Requirements

CALIFORNIA ONLY

G20/2500 SERIES

ENGINE	T	TRANSMISSION AXLES				GVWR		
	3-SP	4-SP AUTO	2.73			#3.73		1
W/YF5 CALIFORNIA E	MISSION R	EQUIREMENTS				· · · · · · · · · · · · · · · · · · ·		
LS9 V8 5.7 Liter (350-4 BBL)		MXO	GQ1	GU4	_	<u> </u>		6600
LH6 Diesel 6.2 Liter V8 (379 Cu. In.)(Reqs B3J)		MXO	_	GQ1	GU6	_		6850

^{*}Regs Z82 Trailering Special; N/A G80 Locking Differential #N/A G80 Locking Differential

G30/3500 SERIES

ENGINE	TRANSMISSION		AXLES				
	AUTO	3.23	3.73 4.10			GVWR	
W/YF5 CALIFORNIA EMISS	ION EQUIPMENT						
LS9 V8 5.7 Liter (350-4 BBL)(N/A C6P)	MXO	GQ1	_	-		7400	
LT9 V8 5.7 Liter (350-4BBL)(Reqs C6P)	MX1			GQ1		8600	
	MXO	-	GQ1	GT5		8600	
LL4 Diesel 6.2 Liter V8 (379 Cu.in.) (Reqs C6P and B3J)	MX0/1	-	GQ1	GT5		8600	

^{\$}G21306 2.73 Axle is not Available; 3.08 Axle is Base.

High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES AT HIGH ALTITUDE; NOT REQUIRED TO SATISFY HIGH ALTITUDE EMISSION REGULATIONS).(REQS LL4 ENG)

SPORTVAN/RALLY **GVWR SELECTOR—ALL STATES EXCEPT CALIFORNIA***

G10/1500 SERIES

GVW	+GAW	R (lbs)	Mis	nimum Equipment	Required for GVW Rating
Rating	<u> </u>		Tire Capacity (lbs ea)		Chassis Equipment
(lbs)	(lbs) Front Rea	Rear	Front	Rear	Chassis Equipment
5600	2906	2906	1453	1453	Standard
6000	3166	3166	1583	1583	HD Power Brakes (J55)

[†]GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES EXCEPT CALIFORNIA*

G10/1500 SERIES

Spare tire to match either front or rear tires must be ordered.

Description	Capacity	Highway		On-Off Road	6
Description	(lbs ea)	Front	Rear	Rear	Spare
TUBELESS					
P205/75R15 Fiberglass Belted Radial	1453	XAY -	YAY —	- *YJT	ZAY *ZJT
P205/75R15 Whitewall Fiberglass Belted Radial	1453	XAZ	YAZ	_	ZAZ
P215/75R15 Steel Belted Radial	1583	XKT	YKT	_	ZKT
P215-75R15 Whitewall Steel Belted Radial	1583	XKU	YKU	_	ZKU
P215/75R15 White Letter Steel Belted Radial	1583	MVX	MVY	_	ZVM

[◆]G10/1500 Sportvan/Rally not available for registration in the state of California. *Steel Belted Radial.

ENGINE RATINGS

ALL STATES

SAE Net Ratings	**4.1 Liter	#*5.0 Liter	*5.7 Liter	**5.7 Liter
	250 2-bbl L6	305 4-bbl V8	350 4-bbl V8	350 4-bbl V8
Net Horsepower	115 @ 3600 rpm	160 @ 4400 rpm	165 @ 3800 rpm	▲160 @ 3800 rpm
Net Torque, lb-ft	200 @ 2000 rpm	235 @ 2000 rpm	275 @ 1600 rpm	▲250 @ 2800 rpm

SAE Net Ratings	*6.2 Liter 379 V8 Diesel	**6.2 Liter 379 V8 Diesel
Net Horsepower	130 @ 3600 rpm	135 @ 3600 rpm
Net Torque, lb-ft	240 @ 2000 rpm	240 @ 2000 rpm

^{*}Engine with Light or Medium Duty Emissions (w/GVWR up to 8500 lb.)

**Engine with Heavy Duty Emissions (w/GVWR over 8500 lb.)

AFor California: 155 @ 4000

240 @ 2800

[#]Not available for registration in the state of California.

SPORTVAN/RALLY GVWR SELECTOR—ALL STATES

G20/2500 SERIES

gvw	†GAW	R (lbs)	Mini	mum Equipment	Required for GVW Rating
Rating			Tire Capacity (lbs ea)		Charles T.
(lbs)	Front Rear	Front	Rear	Chassis Equipment	
6600	3400	3400	1703	1703	Standard (Gasoline Models)
6850	3670	3400	1843	1843	Standard (Diesel Models)

[†]GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

G20/2500 SERIES

Spare tire to match either front or rear tires is available at extra cost.

Description	Capacity	High	way		
	(lbs ea)	(lbs ea) Front		Spare	
TUBELESS (Requires LE3, LE9 o	r LS9 engine)		<u> </u>		
P225/75R15 Steel Belted Radial	1703	XLX	YLX	ZLX	
P225/75R15 Whitewall Steel Belted Radial	1703			ZLZ	
P225/75R15 White Letter Steel Belted Radial	1703	XVN	YVN	ZVN	
TUBELESS (Requires LH6 engine	e)			Aug. v. v.	
P235/75R15 Steel Belted Radial	1843	XBD	YBD	ZBD	
P235/75R15 Whitewall Steel Belted Radial	1843	XBI	YBI	ZBI	
P235/75R15 White Letter Steel Belted Radial	1843	XWV	YWV	ZWV	

GVWR SELECTOR—ALL STATES

G30/3500 SERIES

GVW	†GAW:	R (lbs)	Mini	mum Equipment	Required for GVW Rating
Rating (lbs)	P	7		ity (lbs ea)	Chassis Equipment
(ms)	Front	Rear	Front	Rear	Chassis Aguipment
▲7400	3400	4200	2350	2350	Standard

[▲]Requires LS9 V8 engine.

G30/3500/C6P SERIES

†GAW	R (lbs)	Mini	Required for GVW Rating	
rg Tire		Tire Capac	ity (lbs ea)	Chassis Equipment
ront	Rear	Front	Rear	Chassis Equipment
3900	5360	2680	2680	Standard
	Front		Front Rear Tire Capac	Front Rear Tire Capacity (lbs ea) Front Rear

[†]GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

G30/3500 SERIES

Spare tire to match either front or rear tires is available at extra cost.

Description	Capacity	High		
•	(lbs ea)		Rear	Spare
TUBELESS (Requires LS9 eng	ine)			
8.75R-16.5D Steel Belted Radial	2350	XRU	YRU	ZRU
TUBELESS (Requires LT9 or L	L4 engine)		<u> </u>	
8.75-16.5E Nylon Bias Ply	2680	XTH	YTH	ZTH
8.75R-16.5E Steel Belted Radial	2680	XVD	YVD	ZVD

THE FOLLOWING EQUIPMENT IS STANDARD ON DIESEL ENGINE MODELS (ALSO SEE STANDARD SPECIFICATIONS PAGES)

- Low Coolant Sensor
- Poly-wrapped Paper Element Air Cleaner
- Power Steering
- Engine Block Heater
- Water/fuel separator unit which incorporates a water sensor and sending unit, a fuel filter, a fuel heater and water drain capability
- Hydraulic Power-assisted Brakes
- K81 66-amp Generator
- Engine Oil Cooler (located in radiator tank)
- Dual 550 Cold Cranking Amp/115 min. Reserve Capacity Batteries
- HD Radiator
- Dual Exhaust System
- Warning Lights: Glow Plugs, Water-in-fuel (or fuel filter), and Low Coolant
- Diesel Engine Identification:
 - -Fender nameplates
 - —LH rear door nameplate
 - -- "Diesel Fuel Only" filler cap and label
- Additional Insulation:
 - -Fiberglass/aluminum engine cover and engine cover extension insulators
 - -Special mastic/fibre front floor insulators
 - -Front floor mats which extend under seats
 - -Interior compartment dash panel insulation
 - -Engine compartment dash panel insulation
 - -Hush panels under instrument panel
 - Extra-thick foam-backed cloth headliner for Bonaventure/Rally Custom and Beauville/ Rally STX models
 - -Engine hood insulation
 - -Special rubber seal at cowl

1984 VEHICLES WITH STANDARD EQUIPMENT

-	Description	Model Number	Body Code	Wheel Base			Factory D&H(a)	List Price	Mfr's Suggested Retail Price★	Group Numbe
•	6-Cylinder 4.1 Li	ter (250 C	u. ln.) 2 BE	BL L6 Ga	soline F	ngine-En	nine Ord	lorina Co	do LEO	
	910/G1200 261168					·g···o·Lii	giill o Oit	iernig Co	de LES	
	Sportvan/Raily	CG/TG11006	ZW9	110*	7843.81	7571.14	N.A.	9089.00	9089.00	14
	Sportvan/Rally Bonaventure Sportvan/Rally			125*	8026.76	7747.73	N.A.	9301.00	9301.00	14
	Custom	CG/TG11306	ZM2	125″			N.A.	10062.00	10062.00	14
	Sportvan/Rally STX G20/G2500 Series	CG/TG11306	E94	125'			N.A.	10327.00	10327.00	14
	Sportvan/Rally	CG/TG21206	ZW9	105*						
	Bonaventure Sportvan/Rally			125″			N.A.	9477.00	9477.00	14
	Custom			125″			N.A.	10238.00	10238.00	14
	Sportvan/Rally STX	CG/TG21306	E94	125*			NΔ	10503.00	10502.00	
Þ	8 Cylinder 5.7 Li	ter (350 C	u. in.) 4 BE	L V8 Ga	soline E	naine-En	aine Orc	dering Co	10003.00 1 Ab	14
	430/43500 Series					J	J UIV	g oc		
	Sportvan/Rally Bonaventure Sportvan/Rally	CG/TG31306	ZW9	125″			.60	11963.00	11963.60	14
	Custom	CG/TG31306	ZM2	125*			.60	12724.00	12724.60	14
	Sportvan/Rally STX	CG/TG31306	E94	125*			60	12000.00	100.00.00	
•	8 Cylinder 5.7 Li	ter (350 C	u. In.) 4 BB	LVÄG	soline F	naine En	aino Oro	12989.00	12989.60	14
	G30/G3500 H.D. Series H.D. Sportvan/H. D.	(40000	, . 		John E	igiiio-Lii	gille Ord	lernig Co	de LIS	
	Rally	CG/TG31306	ZW9&C6P	125″			.16	11046.00	11046.16	14
	Sportvan/H.D. Rally Custom	CG/TG31306	ZM2&C6P	125"			.16	11807.00	11807.16	14
	Sportvan/H.D. Rally									
	STX	CG/TG31306	E94&C6P	125"			.16	12072.00	12072.16	14
,	8-Cylinder 6.2 Lit G20/G2500 Series	er (3/9 C	u. In.) L.D. I	Diesei V	8 Engine	-Engine (Ordering	Code Li	16	
	Sportvan/Rally Bonaventure	CG/TG21306	ZW9 & B3J	125"			N.A.	12022.00	12022.00	14
	Sportvan/Rally Custom Beauville	CG/TG21306	ZM2 & B3J	125"			N.A.	12808.00	12808.00	14
	Sportvan/Rally STX	CG/TG21306	E94 & B3J	125"			N A	12998.00	12000 00	
•	8 Cylinder 6.2 Lin	ter (379 C	u. In.) H.D.	Diesel V	8 Fnaine	-Fngine	N.A. Orderina	r Code I	12998.00	14
	Series		,		o Engine	- Engine	Ordering	y Code L	L -4	
	H.D. Sportvan/H. D.									
	Rally	CG/TG31306		405"		•				
	H.D.Bonaventure Sportvan/H.D. Rally		B3J	125″			.16	13241.00	13241.16	14
	Custom	CG/TG31306	ZM2&C6P &							
		,	B3J	125"			.16	14027.00	14027.16	4.4
	H.D.Beauville		-				.10	14027.00	14027.10	14
	Sportvan/H.D. Raily	DO /TOO 400-	P040 CC- 7							
	STX	CG/TG31306	E94&C6P & B3J	125*						
			DJJ	125"			.16	14217.00	14217.16	14

[★] Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or accessories or special items or services.

[♦] Refer to Dealer Order Guide for California Requirements.

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

, Description	Option Number	Factory List D&H(a) Price	Mfr's Suggested Retail Price♦
Cont Trime (Con Interior and Establish Color O. L. d. O. C.			
Seat Trim: (See Interior and Exterior Color Selection Chart or ordering information).			
/**4 Standard Vinyl High Back Bucket Seats	•••	NO ADDITIONAL CHARG	E
Without E94 or ZM2		N.A. 41.00	
With E94 or ZM2 **4 Custom Cloth High Back Bucket Seats	• • •	NO ADDITIONAL CHARG NO ADDITIONAL CHARG	
**6 Custom Cloth Reclining Bucket Seats. Includes left and right hand folding adjustable armrests and color-keyed door closing assist straps for front doors in place of armrests.	• • •		
Paints, Exterior: (See Interior and Exterior Color Selection thart for Ordering Information and Paint Application).	•••	N.A. 380.00	380.00
Solid	ZY1	NO ADDITIONAL CHARG	E
Special Two-Tone.	71/0		
Without E94. Includes B84 Black Body Side Moldings With E94	ZY3 ZY3	N.A. 233.00 N.A. 111.00	
Peluxe Two-Tone.	213	N.A. 111.00	111.00
Without E94. Includes B84 Black Body Side Moldings	ZY4	N.A. 245.00	
With E94	ZY4	N.A. 123.00	123.00
xterior Decor Package. Without E94. Includes D85 Striping, B84 Black Body Side			
and B96 Wheel Opening Moldings	ZY5	N.A. 484.00	484.00
With E94	ZY5	N.A. 294.00	
imission Systems: Dealer Note - One of the following mission options must be specified. (See Power Teams Chart			
or availability and complete specifications) California Emission Requirements. Includes all testing,			
equipment and/or certification necessary for registration in the State of California. Not available when NA6 High Altitude or NA5 Standard Emissions is specified.			
With LE3 4.1 Liter or LS9 5.7 Liter Engine	YF5	N.A. 235.00	235.00
With LT9 5.7 Liter Engine	YF5	N.A. 235.00	
With B3J Diesel Equipment	YF5	N.A. 235.00	
California Emissions are specifed	NA6	NO ADDITIONAL CHARG	E
California or NA6 High Altitude Emissions are specified	NA5	NO ADDITIONAL CHARG	E
ingines: (See Power Teams Chart for availability and omplete specifications) Gasoline.			
4.1 Liter (250 Cu. In.) 2 BBL L6. G1-2 Series only 5.7 Liter (350 Cu. In.) 4 BBL V8. Standard on G3 Series without C6P H.D. Chassis. Not available when C6P H.D.	LE3	NO ADDITIONAL CHARG	E
Chassis is specified	LS9	N.A. 531.00	531.00
C6P H.D. Chassis	LT9	NO ADDITIONAL CHARG	
5.0 Liter (305 Cu. In.) 4 BBL V8. G1-2 Series only	LE9	N.A. 350.00	350.00
6.2 Liter (379 Cu. In.) L.D. V8 Diesel. G2 Series only. Available only when B3J Diesel Equipment is specified.	LH6	NO ADDITIONAL CHARG	E.
6.2 Liter (379 Cu. In.) H.D. V8 Diesel. G3 Series only.	=		
Available only when B3J Diesel Equipment is specified.	LL4	NO ADDITIONAL CHARG	E
Transmissions: I-Speed Automatic with Overdrive. Standard on G3 Series without C6P H.D. Chassis			
G1-2 Series only	MXO	N.A. 650.00	650.00
G3 Series with C6P H.D. Chassis	MXO	N.A. 186.00	186.00
G1-2 Series only. Not available when YF5 California Emissions or B3J Diesel Equipment is specified	MX1	N.A. 492.00	492.00
G3 series only. Standard on G3 Series with C6P H.D.	MV1	NO ADDITIONAL CUADO	-
Chassis	MX1	NO ADDITIONAL CHARG	E
Series	ммз	NO ADDITIONAL CHARG	E
I-Speed Manual with Overdrive. G2 Series only. Standard on		NO ADDITIONAL CHARG	

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggeste Retail Price
vice Poor (San Dayson Turn Olympia				
Axles, Rear: (See Power Teams Chart for option number election, availability and complete specifications)				
ocking Differential	G83	N.A.	36.00	36.00
ires: (See Tire Charts for Tire Availability) Il rim sizes are 6.00" on G1-2 Series except when N67 Wheels are specified.	980	N.A.	230.00	230.00
II rim sizes are 6.75" on G3 Series. UBELESS				
205/75R15 Highway Fiberglass Belted Radial Ply Blackwall Maximum Capacity 1453-lbs)				
Front (Standard)	XAY	NO ADDITIONA	L CHARGE	
Rear (Standard)	YAY	NO ADDITIONA		
Spare (Standard) 205/75R15 Highway Fiberglass Belted Radial Ply Whitewall Maximum Capacity 1453-lbs)	ZAY	NO ADDITIONA	L CHARGE	
Front	XAZ	N.C.	26.00	26.00
Rear	YAZ	N.C.	26.00	26.00
Spare	ZAZ	N.C.	13.00	13.00
Rear	YJT	N.C.	54.00	E 4 00
Spare	ZJT	N.C.	27.00	54.00 27.00
Front	XKT			
Rear	YKT	N.C. N.C.	58.00	58.00
Spare	ZKT	N.C.	58.00 29.00	58.00 29.00
Front	XKU			
Rear	YKU	N.C.	86.00	86.00
Spare	ZKU	N.C. N.C.	86.00 43.00	86.00 43.00
aximum Capacity 1583-lbs) Front				
Rear	XVM	N.C.	98.00	98.00
Spare	YVM ZVM	N.C.	98.00	98.00
25/75R15 Highway Steel Belted Radial Ply Blackwall aximum Capacity 1703-lbs). Not available when B3J Diesel Equipment is specified.	24111	N.C.	49.00	49.00
Front (Standard)	XLX	110 455171011		
Rear (Standard)	YLX	NO ADDITIONA. NO ADDITIONA.	LCHARGE	
Spare	ZLX	N.C.	130.00	130.00
25/75R15 Highway Steel Belted Radial Ply Whitewall aximum Capacity 1703-lbs). Not available when B3J Diesel Equipment is specified.			.00.00	100.00
Front	XLZ	N.C.	34.00	34.00
Rear	YLZ	N.C.	34.00	34.00
Spare	ZLZ	N.C.	147.00	147.00
quipment is specified. Front	VI AI			
Hear	XVN YVN	N.C.	46.00	46.00
Spare	ZVN	N.C. N.C.	46.00 153.00	46.00
35/75R15 Highway Steel Belted Radial Ply Blackwall aximum Capacity 1843-lbs). Available only when B3J Diesel Equipment is specified.		14.0.	133.00	153.00
Front	XBD	NO ADDITIONAL	CUADOS	
Rear	YBD	NO ADDITIONAL NO ADDITIONAL		
Spare	ZBD	NO ADDITIONAL N.C.	143.00	143.00

 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

December -	Option Number	Factory	List	Mfr's Suggeste Retail
Description	Number	D&H (a)	Price	Price
ires: (Continued)				
P235/75R15 Highway Steel Belted Radial Ply Whitewall.				
(Maximum Capacity 1843-lbs). Available only when B3J Diesel				
Equipment is specified.				
Front	XBJ	N.C.	34.00	34.00
Rear	YBJ ~	N.C.	34.00	34.00
Spare	ZBJ	N.C.	160.00	160.00
P235/75R15 Highway Steel Belted Radial Ply White Lettered				
(Maximum Capacity 1843-lbs). Available only when B3J Diesel				
Equipment is specified.	VIAN/		40.00	40.00
Front	XWV	N.C.	46.00	46.00
Rear	YWV	N.C.	46.00	46.00
Spare	zwv	N.C.	166.00	166.00
8.75R-16.5/D Highway Steel Belted Radial Ply Blackwall				
(Maximum Capacity 2350-lbs). Available only when LS9 5.7				
Liter Engine is specified. Front (Standard)	XRU	NO ADDITIONAL	CHARGE	
Rear (Standard)	YRU	NO ADDITIONAL		
		.15	236.00	236.15
Spare	ZRU	.15	230.00	230.15
8.75-16.57E Highway Nylon Blackwall (Maximum Capacity 2680-lbs). Available only when C6P H.D.				
Chassis is specified.				
Front (Standard)	XTH	NO ADDITIONAL	CHARGE	
Rear (Standard)	ŶTH	NO ADDITIONAL		
Spare	ZTH	.04	181.00	181.04
8.75R-16.5/E Highway Steel Belted Radial Ply Blackwall	2111	.04	181.00	101.04
(Maximum Capacity 2680-lbs). Available only when C6P H.D.				
Chassis is specified.				
Front	XVD	1.50	144.00	145.50
Rear	ŶVD	1.50	144.00	145.50
Spare	ZVD	.79	253.00	253.79
0.7	HER OPTIONS			
01	11211 01 110110			
,	11211 01 110110			
Air Conditioning: All Weather. E94 with Gasoline V8	nen or mono			
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55	nen or mono			
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra	TIEN OF HONO			
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling.	HER OF HORO			
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat	HER OF HORO			
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only.				
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp		N A	945.00	945.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60	N.A.	845.00	
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment.		N.A. N.A.	845.00 785.00	
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Front and Rear. Front instrument panel mounted and rear	C60			
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Front and Rear. Front instrument panel mounted and rear overhead systems. Available only when V8 Engine is	C60			
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60			
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60 C60	N.A.	785.00	785.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Front and Rear. Front instrument panel mounted and rear overhead systems. Available only when V8 Engine is specified. Without B3J Diesel Equipment. Includes K81 66-Amp Generator.	C60 C60	N.A. N.A.	785.00 1375.00	785.00 1375.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Front and Rear. Front instrument panel mounted and rear overhead systems. Available only when V8 Engine is specified. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment.	C60 C60	N.A.	785.00	785.00 1375.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment Front and Rear. Front instrument panel mounted and rear overhead systems. Available only when V8 Engine is specified. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Battery: Heavy-Duty. 12-Volt, 515 Cold Cranking Amps	C60 C60	N.A. N.A.	785.00 1375.00	785.00 1375.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Front and Rear. Front instrument panel mounted and rear overhead systems. Available only when V8 Engine is specified. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. With B3J Diesel Equipment. Battery: Heavy-Duty. 12-Volt, 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is	C60 C60	N.A. N.A.	785.00 1375.00	785.00 1375.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60 C60 C69 C69	N.A. N.A. N.A.	785.00 1375.00 1315.00	785.00 1375.00 1315.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60 C60	N.A. N.A.	785.00 1375.00	785.00 1375.00 1315.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60 C60 C69 C69	N.A. N.A. N.A.	785.00 1375.00 1315.00	785.00 1375.00 1315.00 50.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60 C60 C69 C69	N.A. N.A. N.A.	785.00 1375.00 1315.00 50.00	785.00 1375.00 1315.00 50.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment mounted and rear overhead systems. Available only when V8 Engine is specified. Without B3J Diesel Equipment. Includes K81 66-Amp Generator With B3J Diesel Equipment. Includes K81 66-Amp Generator With B3J Diesel Equipment. Battery: Heavy-Duty. 12-Volt, 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified. Included when Z82 Heavy-Duty Trailering Special is specified Brakes: Heavy-Duty Power. Standard on G2-3 Series Bumper Equipment:	C60 C60 C69 C69	N.A. N.A. N.A.	785.00 1375.00 1315.00 50.00	785.00 1375.00 1315.00 50.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment Front and Rear. Front instrument panel mounted and rear overhead systems. Available only when V8 Engine is specified. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Battery: Heavy-Duty. 12-Volt, 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified. Brakes: Heavy-Duty Power. Standard on G2-3 Series Bumper Equipment: Bumpers, Front and Rear. Chromed. Standard on E94 and	C60 C60 C69 C69 UA1 J55	N.A. N.A. N.A. N.A.	785.00 1375.00 1315.00 50.00 76.00	845.00 785.00 1375.00 1315.00 50.00 76.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Front and Rear. Front instrument panel mounted and rear overhead systems. Available only when V8 Engine is specified. Without B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Includes K81 66-Amp Generator. With B3J Diesel Equipment. Battery: Heavy-Duty. 12-Volt, 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified. Included when Z82 Heavy-Duty Trailering Special is specified. Brakes: Heavy-Duty Power. Standard on G2-3 Series Bumper Equipment: Bumpers, Front and Rear. Chromed. Standard on E94 and ZM2	C60 C60 C69 C69	N.A. N.A. N.A.	785.00 1375.00 1315.00 50.00	785.00 1375.00 1315.00 50.00 76.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60 C60 C69 C69 UA1 J55	N.A. N.A. N.A. N.A.	785.00 1375.00 1315.00 50.00 76.00	785.00 1375.00 1315.00 50.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60 C60 C69 C69 UA1 J55	N.A. N.A. N.A. N.A. N.A.	785.00 1375.00 1315.00 50.00 76.00	785.00 1375.00 1315.00 50.00 76.00
Air Conditioning: All Weather. E94 with Gasoline V8 Engine available only when 1583-lb capacity tires and J55 H.D. Power Brakes are specified on G1 Series. Includes extra cooling. Front. Instrument panel mounted. Recommended for front seat area cooling only. Without B3J Diesel Equipment. Includes K81 66-Amp Generator	C60 C60 C69 C69 UA1 J55	N.A. N.A. N.A. N.A.	785.00 1375.00 1315.00 50.00 76.00	785.00 1375.00 1315.00 50.00 76.00

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price♦
ОТ	HER OPTIONS			
Coolers: Available only when MXO or MX1 Automatic				
Transmission and V8 Gasoline Engine are specified Not				
available when B3J Diesel Equipment is specified. Included				
when Z82 Trailering Special is specified.				
Engine Oil. G2-3 Series only. Available only when V02 Transmission Oil Cooler is specified	V0.4			
Transmission Oil. Heavy-Duty. G1-2 Series available only	KC4	N.A.	116.00	116.00
when V05 H.D. Cooling, C60 Front or C69 Front and Rear Air				
Conditioning is specified	V02	N.A.	57.00	57.00
Cooling: Heavy-Duty. Not available when C60 Front or C69		4		07.00
Front and Rear Air Conditioning or B3J Diesel Equipment is				
specified. Includes increased capacity radiator and clutch type				
fan Doors: One of the following door options must be specified.	V05	N.A.	51.00	51.00
Side Swing Out. Replaces YA2 Standard Sliding Side Door	E24			
Side Sliding	YA2	NO ADDITIONAL NO ADDITIONAL		
Door Lock System, Power: All Doors, Included when		NO ADDITIONAL	CHARGE	
ZQ2 Operating Convenience Package is specified	AU3	N.A.	190.00	190.00
Extender Link, Side Rear Door: Not Available when		14.7.	130.00	190.00
E24 Swing Out Side Doors are specified	AW4	N.A.	34.00	34.00
Floor Covering:			04.00	34.00
Carpeting, Wheelhousing and Floor. Standard on E94.				
Includes stepwell mats. 125" wheelbase only.				
Without ZM2 With ZM2 without B3J Diesel Equipment	B30	N.A.	172.00	172.00
With ZM2 and B3J Diesel Equipment	B30 B30	N.A.	139.00	139.00
Mats, Color-Keyed. Front floor. Available only when E94 or	550	N.A.	105.00	105.00
B30 Carpeting is specified	B32	N.A.	20.00	20.00
Sages: Voltmeter, Temperature and Oil Pressure	Z53	N.A.	38.00	38.00
Generator: 66-Amp Delcotron. Included when B3J Diesel equipment, C36 Rear Heater, C60 Front or C69 Front and Rear			00.00	30.00
Air Conditioning is specified	K81	N.A.	60.00	60.00
Glass:			00.00	00.00
inted.				
All Windows. Includes A02 Windshield Glass	A01	N.A.	95.00	95.00
Windshield only. Included when A01 Tinted, AA3 Deep Tinted or AJ1 Deep Tinted Glass is specified	400			
Deep Tinted. Not available when A01 Tinted Glass is	A02	N.A.	35.00	35.00
specified. Includes tinted glass on passenger and driver's				
side door. Also includes AO2 Windshield Glass and dark				
laminated glass on side windows and rear door.	AJ1	N.A.	367.00	367.00
Deep Tinted with Light Tinted Rear Window. Not available when A01 Tinted or AJ1 Deep Tinted Glass is specified.				
Includes tinted glass on passenger, driver's side and rear				
doors. Also includes AO2 Tinted Windshield and dark				
laminated glass on side windows	AA3	N.A.	307.00	307.00
wing-Out Rear Door	A18	N.A.	53.00	53.00
leadlamps:				
lalogen. Not available when E94 is specified on G1 Series. Without E94	*****			
With E94. Available only when B3J Diesel Equipment is	TT4	N.A.	21.00	21.00
specified	TT4	N.A.	21.00	24.00
lalogen Hi-Beam. Available only when E94 is specified. Not		N.A.	21.00	21.00
available when B3J Diesel Equipment is specified	TT5	N.A.	16.00	16.00
leaters:				
ngine Block. 600 Watts, 120 Volts. Not available when B3J				
Diesel Equipment is specifiedear.	K05	N.A.	31.00	31.00
Without B3J Diesel Equipment, C60 Front or C69 Front and				
Rear Air Conditioning, Includes K81 66-Amp Generator	C36	N.A.	248.00	248.00
With B3J Diesel Equipment, C60 Front or C69 Front and	- 	N.A.	.70.00	240.00
Rear Air Conditioning				

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

[♦] State and local taxes not included.

OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price♦
ОТІ	HER OPTIONS			
Key Unit: Separate keys for side and rear cargo doors	AU2	N A	2.00	
Lighter, Cigarette: Standard on E94 and ZM2	U37	N.A.	8.00	8.00
Lighting, Auxiliary: Includes headlamp warning buzzer,	037	N.A.	29.00	29.00
RH and LH front stepwell, light for sliding door stepwell	TR9	N.A.	95.00	95.00
Mirrors, Exterior: LH and RH. Below-Eye-Line Type. 9" x 6.5"		N.A.	95.00	95.00
Painted	D44	N.A.	48.00	48.00
Stainless Steel	D45	N.A.	78.00	78.00
Moldings:				7 0.00
Body Side, Black. Not available when E94 is specified. Included when ZY3 Special Two-Tone Paint, ZY4 Deluxe				
Two-Tone Paint, or ZY5 Exterior Decor Package is specified Wheel Opening. Standard on E94. Included when ZY5	B84	N.A.	122.00	122.00
Exterior Decor Package is specified Operating Convenience Package: Includes AU3	B96	N.A.	68.00	68.00
Power Door Locks and A31 Power Windows	ZQ2	N.A.	370.00	370.00
Preliminary Price Information	B3W	N.A.	N.A.	N.A.
Radio Equipment:				
AM Radio. Includes dual front speakers	U63	N.A.	112.00	112.00
AM/FM Radio. Includes dual front speakers	U69	N.A.	171.00	171.00
Without E94 or ZM2. Also includes wiring for rear speakers With E94 or ZM2. Also includes dual rear speakers	U58	N.A.	178.00	178.00
AM/FM Stereo Radio with Stereo Cassette Tape. Includes dual front speakers.	U58	N.A.	198.00	198.00
Without E94 or ZM2. Also includes wiring for rear speakers	UN3			
With E94 or ZM2. Also includes dual rear speakers	UN3	N.A. N.A.	278.00 298.00	278.00 298.00
Seats, Rear: One of the following seat options must be specified on all models except G3 series with LS9 5.7 Liter Engine. Includes RH and LH armrests, ashtrays and (3) seat belts. (Added weight includes passenger weight allowance of 150-lb per seating position. Refer to vehicle and option weight section of Data Book.) One Additional Rear Seat. For 8-passenger seating. G2-3 Series only. Not available on G3 Series when LS9 5.7 Liter Engine is specified.				
Without B6S Travel Bed	AQ3	N.A.	270.00	270.00
With B6S Travel Bed	AQ3	NO ADDITIONAL	. CHARGE	
and rear door scuff plate	AQ4	N.A.	560.00	560.00
Without AQ3 Rear Seat. Replaces standard bench seat .	B6S	N.A.	676.00	676.00
With AQ3 Rear Seat. Replaces AQ3 Rear Seat	B6S	N.A.	940.00	940.00
Seat Not Desired. Not Available when LS9 5.7 Liter engine is				2.0.00
specified on G3 series	YG4	NO ADDITIONAL	CHARGE	
Shock Absorbers: Heavy Duty. Front and Rear	F51	N.A.	32.00	32.00
Speed Control, Electronic	K34	N.A.	185.00	185.00
Series only	G50	N.A.	32.00	32.00
Stabilizer Bar: Front. Standard on G3 Series. Included when Z82 Heavy-Duty Trailering Special is specified	F59	N.A.	35.00	35.00

⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

N33 N31 AD8 BA8	N.A. N.A. N.A.	110.00 25.00 34.00	110.00 25.00
N31 AD8	N.A.	25.00	
N31 AD8	N.A.	25.00	
AD8	N.A.	25.00	
	N.A.	34.00	
BA8			34.00
	N.A.	34.00	34.00
D85			
	N.A.	67.00	67.00
NL7	N.A.	85.00	85.00
VR2	N.A.	62.00	62.00
VR4	N A	172.00	172.00
	N.A.	172.00	172.00
		542.00	542.00
202	N.A.	321.00	321.00
Z82	N.A.	507.00	507.00
Z82	N.A.	286.00	286.00
Z72	N.A.	121.00	121.00
PA1	N.A.	60.00	60.00
N67	N.A.	109.00	109.00
A31	N.A.	180.00	180.00
	VR2 VR4 Z82 Z82 Z82 Z82 Z82 Z82 Z82	NL7 N.A. VR2 N.A. VR4 N.A. Z82 N.A. Z82 N.A. Z82 N.A. Z82 N.A. Z82 N.A.	NL7 N.A. 85.00 VR2 N.A. 62.00 VR4 N.A. 172.00 Z82 N.A. 542.00 N.A. 321.00 Z82 N.A. 286.00 Z72 N.A. 286.00 Z72 N.A. 121.00 N.A. 60.00


 ⁽a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

NOTES

CAB & BODY FEATURES
BODY CONSTRUCTION
SEATING ARRANGEMENTS
COLOR & TRIM CHARTS
TWO-TONES

SPORTVAN/RALLY STANDARD MODEL—BODY ORDERING CODE ZW9

The standard model includes the following items as standard equipment

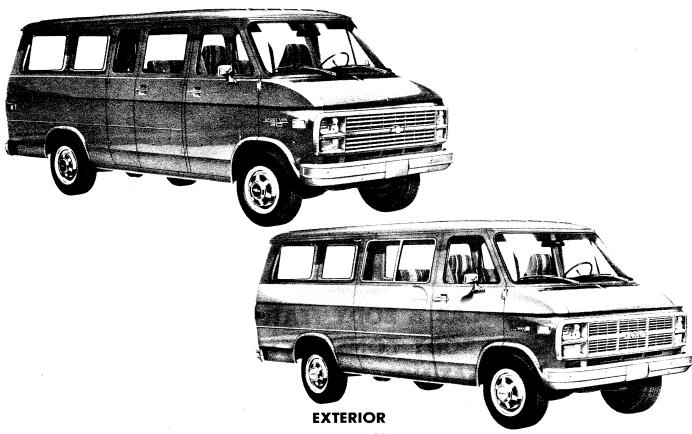

- Bumpers: Front and rear; painted silver
- Colors: See Interior and Exterior Color Selection Chart
- **Doors:** RH and LH front side doors; RH and LH rear load doors; a RH sliding side load door is standard, however, hinged RH side loading doors are available
- Door Opening and Locking Methods:

Front side doors: Outside pushbutton latch release in door handle with separate key lock; keyless outside locking Sliding side load door: Turning outside handle counterclock-

Sliding side load door: Turning outside handle counterclockwise releases both front and rear latches; to close door, reverse procedure; for opening and closing of door from inside, reverse outside procedure; door is locked from outside through a separate key lock

RH and LH rear doors: Pushbutton latch release in RH door handle opens door, and after opening RH door, LH door latch is released by lower inside lift handle; separate key lock cylinder in RH door

• Glass:

Windshield

Whiteshed
RH and LH front side door drop glass and pivoting ventipanes
with pushbutton locks

Double flip-out glass in sliding side door and same on opposite side; bright frames


Stationary glass in each rear-quarter window and rear door

- **Grille:** Molded plastic; painted light argent; integral Chevrolet emblem/GMC letters at center
- **Grille Frame:** Headlamp parking-lamp bezels plus upper and lower moldings joining extensions of lamp bezels; painted light argent
- Horns: Dual, electric, low- and high-note
- Hub Caps: Bright metal with black trim
- **Keys:** Two-key system, with separate keys for ignition switch and door locks

Lights:

Backup lamps: Two rear (integral with taillamps)
Combination parking/direction/hazard: Two front
Combination tail/stop/direction/hazard: Two rear
Headlamps: Two; Rectangular
License plate lamp: Single rear
Side marker lamps and reflectors: Two front and two rear

- Mirrors: RH and LH chrome; fixed arm with adjustable 4½" x 6" head
- Nameplates: Bright "Sportvan/Rally" plates on front fenders; bright "Chevrolet/GMC letters" plate on LH rear door
- Tools: Mechanical jack and wheel wrench
- Undercoating: On body rocker panels, step panels, and wheelhousings
- Wheels: Painted white
- Windshield Wipers and Washers: Electric, 2-speed wipers with matte finish on exposed metal portions; wet-arm design demand-type washer system



SIDE SWING OUT DOORS—RPO A24

These hinged double side doors are available at no extra cost to replace the standard sliding side door. They feature stainless steel hinge pins and galvanized steel outer panels. The forward door is approximately 12 inches wider than the rearward door to provide a wide opening for cargo or passengers when only the forward door is opened.

STANDARD MODEL—BODY ORDERING CODE ZW9

The standard model includes the following items as standard equipment



INTERIOR

- Air Vents: RH and LH; individually controlled
- Armrests: RH and LH side door and rear seat; padded
- Ashtrays: At top of instrument panel extension, with door. In rear seat armrests; with covers
- Coat Hook: LH side
- Colors:

Painted areas: Same as exterior primary color choice Interior trim: Coordinated with seat trim color choice

- Dome Lamps: Two; with front door-actuated switches (dome lamps may also be activated by main light switch)
- Door Locks: Inside pushbutton lock/release for front doors: rotating locking knob for sliding side door
- Door Seals: Latex foam rubber
- Floor Covering: Embossed black rubber mats; over entire floor area and front wheelhousings
- Headliner: Mystic-colored perforated hardboard; driver area
- Heater and Defogger: Deluxe-air
- Hood Lock Release: Handle located on LH side of instrument panel
- Instruments:

Gages: Speedometer, odometer, and fuel

Switches: Main, for control of exterior lights, instrument lights and dome lights; multi-function switch on steering column for direction signals by moving lever up or down (includes lane change position), headlight beams by pulling lever toward driver, windshield wiper by turning band marked "WIPER" toward or away from driver, and windshield washer by pushing in the lever knob; ignition with key-in warning buzzer; hazard warning; heater fan; door-operated dome lamp

Warning lights: Generator, oil pressure, engine temperature, service-parking brake, direction/hazard signal, and high beam

- Instrument Panel: Bright trim on gage bezels; black applique with bright trim on area below instrument cluster
- Insulation and Sound Deadening Material: Dash (firewall), entire floor panel, engine cover front extension, and inside engine cover
- Lights: Instruments, front and rear dome
- Main Light Switch Control Knob: Bright, with brushed finish and black graphic identification
- Mirror: 10", vinyl-edged prismatic
- Parcel Tray: On top surface of instrument panel extension; includes beverage holder provisions
- Safety Step Pads: Front and rear side door step panels
- Seat Belts: Color-keyed with pushbutton release; driver, front passenger and all rear seat positions; outboard retractors for driver and front passenger
- Seats: Front, adjustable high-back bucket driver and passenger; rear quick release, removable 3-passenger; all-vinyl trim; foam padded (G30/3500 models without C6P have 2 additional quick release, removable rear seats for 12 passenger seating. See page D). Also available at extra cost: all-vinyl leather grained trim. See Interior and Exterior Color Selection Chart for color and trim availability
- Spare Tire Carrier: RH rear side
- Steering Wheel and Column: 15.25" diameter black soft vinyl wheel with 2 spokes; black energy-absorbing steering column with anti-theft locking feature
- Stowage Box: In front face of instrument panel extension; with latched door
- Sunshades: RH and LH padded, color keyed
- Trim Panels: Painted metal with decorative embossments; front and rear side doors

G30/3500 <u>WITHOUT</u> C6P HEAVY DUTY CHASSIS STANDARD MODEL

This model includes all items listed on pages B & C plus the following additions or substitutions (See page 4 for chassis standard equipment differences)



• **Seats:** In addition to the driver and passenger front high bucket seats and the 3-passenger center seat, this model includes as standard equipment RPO AQ4—Two additional rear seats, which provide 12-passenger seating. All passenger seats (except front high-back bucket) are the quick-release, removable type, with all-vinyl trim that matches the front seats.

• 7400-lb GVW Rating



NOTES

BONAVENTURE/RALLY CUSTOM SPORTVAN MODEL—BODY ORDERING CODE ZM2

This option includes all exterior items listed for the standard model plus the following additions or substitutions



EXTERIOR

• Bright Appearance Items:
"Bonaventure/Rally Custom" nameplates, on front fenders Front and rear bumpers Taillamp bezels Upper and lower grille outline moldings
Bright applied Chevrolet emblem/GMC letters at grille center

• Grille: Chevrolet—Dark argent with bright applied Chevrolet

emblem

GMC-Light argent with dark argent air intake areas and bright applied GMC letters with red paint fill

Grille Frame: Light argent headlamp/parking lamp bezels with dark argent centers and bright outboard perimeter moldings; bright upper and lower grille outline moldings



INTERIOR

Bright Appearance Items:

Bonaventure/Rally Custom" lettering and trim on applique at RH side of instrument panel Trim moldings at center of instrument panel

• Cigar Lighter: With ash tray light

• Coat Hooks: LH and RH side, above rear-quarter windows; plus one on LH side panel to rear of drivers seat

• Floor Covering: Color-keyed rubber mats; for entire floor area, including front and rear wheelhousings

• Garnish Moldings: Slate or saddle tan colored plastic moldings for rear compartment side windows, front and rear roof header panels, roof front side rails and windshield pillars, front door lock pillars, lower sliding door hinge pillar, and sliding door track and roller bracket

• **Headliner:** Full-length, slate or saddle tan colored; foam-backed

• Deluxe Instrument Panel: Two-tone color treatment, colorkeyed instrument cluster bezel; woodgrain applique and bright trim with woodgrain insert for central area; black applique with bright trim and Bonaventure/Rally Custom lettering on RH side

• Insulation: Above headliner and on wheelhousing areas

• Seats: High-backed driver and front passenger bucket seats and standard rear passenger seat with leather grained all-vinyl trim. See Interior and Exterior Color Selection Chart for color and trim availability

Spare Tire Cover: Gl models-black vinyl; G2-3 modelscolor-keyed carpet type

Trim Panels: Colored-keyed, vinyl-coated, embossed hardboard on doors and sidewalls

BEAUVILLE SPORTVAN/RALLY STX MODEL—BODY ORDERING CODE E94

This model includes all items listed for Bonaventure/Rally Custom model option plus the following additions or substitutions



EXTERIOR

Bright Appearance Items:


Beauville/Rally STX" nameplates, on front fenders Body side and rear upper moldings with black paint trim Wheel opening lip moldings Front door ventipane posts

Trim for side marker lamps and reflectors

• Grille: Chevrolet—Bright center bar moldings with body color paint fill

- Headlamp Bezels: Chevrolet—Bright center bar moldings with body color paint fill
- GMC—Center bars painted light argent

 Special Headlamps: Rectangular; dual RH and LH (single RH and LH when diesel engine is ordered)
- Special Side Marker Lamps and Reflectors: RH and LH front and rear

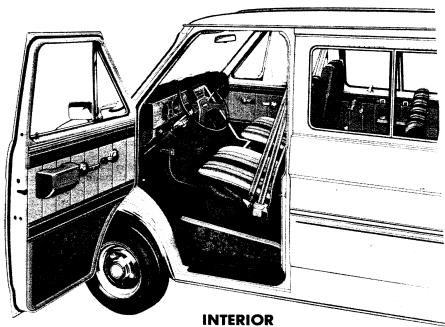

• Bright Appearance Items:

Beauville/Rally STX" lettering and trim on RH instrument panel trim plate

Trim on door and sidewall trim panels

• Enclosure Panels: Color-keyed plastic trim panels to conceal rear seat armrest supports and seat risers

- Floor Covering: Color-keyed carpeting; over entire floor area including front and rear wheelhousings; lower portion of engine cover and vertical walls of front and rear side door stepwells

 Garnish Moldings: Color-keyed to seat trim color
- Headliner: Color-keyed to seat trim color
- Instrument Cluster Bezel: With woodgrain applique
- Insulation: Under instrument panel upper extension; behind

door and sidewall trim panels

- Seats: High-backed driver and front passenger bucket seats, and standard rear passenger seat with choice of: 1) dual-tone striped vinyl trim; or 2) ribbed pattern velour cloth/vinyl trim. See Interior and Exterior Color Selection Chart for color and trim availability
- Stepwell Mats: Embossed black rubber mats for top surface of front and rear side door stepwells
- Trim Panels: Embossed, color-keyed vinyl on doors and sidewalls with styling coordinated with seat trim and carpeting on lower areas
- Visor Mirror: On RH sun visor

BODY CONSTRUCTION FEATURES



The all-steel, Chevy Van/Vandura and Sportvan/Rally bodies feature body-frame integral construction for outstanding structural rigidity and excellent durability. The basic bodies of either the nominal 15 foot (110" WB) or 17 foot (125" WB) models are comprised of an underbody structure, front end structure, left and right hand side panel structures, and a roof panel structure.

Longitudinal side rails, cross sills, and outriggers form the integral frame to which front and rear floor panels are welded, completing the underbody structure. Main structural members are of heavy-gage steel. A step well is incorporated in the underbody in the area adjacent to the front doors and sliding side door to provide convenient entry and exit.

The front end structure incorporates an engine compartment with outside opening hood panel which affords quick and easy access to 27 service points, such as the engine, radiator, battery, brake master cylinder and windshield washer reservoir. The radiator support upper tie bar and baffles are mechanically attached to facilitate engine removal. A plenum chamber with high-level air intake is utilized in the front end structure to assure a plentiful supply of dry, outside air for interior heating and ventilating as well as to add rigidity to the overall body structure. Air outlets to the interior are provided on the left hand and right hand sides by manually controlled doors (RH door omitted with optional air conditioning).

Side panel structures are comprised basically of seamless, one-piece outer panels reinforced with vertical strainers and welded to roof rails at the top and to rocker panels at the bottom. Left hand side panel structures utilize three vertical strainers, with a fourth strainer added for 17-foot bodies. Right hand side panel structures, which are smaller because of the provision for the base side load door, are reinforced with one vertical strainer in 15-foot body applications and two strainers in 17-foot body applications. Two window openings are incorporated in the left hand side panel for all Sportvans/Rally, or for Chevy Vans/Vandura with RPO A07 body glass; one window is incorporated for Chevy Vans/Vandura with RPO A17 body glass. The right hand side panel for Sportvan/Rally models, or Chevy Van/Vandura with RPO A07 or A08 body glass, has one window. Provision is made at the rear of the left hand side panel for incorporation of a door to conceal the fuel tank filler.

Roof panels are of one-piece design and are embossed with six longitudinal stiffening ribs. Four roof bows support the 15-foot body roof panel, while five roof bows are used for the 17-foot body.


Special attention is given to corrosion prevention during the construction and final finishing of the body. The following body design features occur during the construction of the body:


- 1. Use of special steel (galvanized, zinc iron alloy, zinc coated) for body components expecially subject to corrosion.
- 2. Use of one-piece outer panels to minimize exterior joints where corrosion might occur.
- 3. Use of heavy-gage steel for main underbody components.
- 4. Use of weld-through sealers in the assembly process to assure strong welds.

After body construction is completed, additional corrosion preventative steps are taken in the final finishing operation. The following occur:


- The body, doors and hood are thoroughly cleaned by processing them through a 7-stage zinc phosphate washer.
- 2. Next, the body, doors and hood are primed by the Elpo electro-coating process which is the deposition of an electrically charged colloidal paint using an electric current. Electro-coating assures uniform application of primer even on surfaces normally inaccessible. In the process, the body, doors and hood are submerged in an emulsion of water and paint; the body, doors and hood and the emulsion are then oppositely charged, causing the paint to adhere to the metal.
- 3. Sealers are then applied to all critical interior-exterior joints.
- Undercoating is sprayed on the undersurfaces of the wheelhousings, front door step panels and body rocker panels.
- 5. The body, doors and hood are painted with enamel.
- 6. A sealer pad is installed on the top surface of the floor panel at the left hand side, and is bonded to the floor panel as the body bakes in the topcoat oven.
- 7. The lower inside surfaces of the doors and rocker panels are sprayed with aluminum wax preservative.
- 8. A protective coating is applied to the front door hinge pins.
- Finally, an anti-chip coating is added which extends from the rear of the front wheel openings to the rear door openings to prevent stone chipping.

SPORTVAN/RALLY SEATING ARRANGEMENTS







STANDARD 5-PASSENGER SEATING (125" WB)
*110" WB MODELS




OPTIONAL 8-PASSENGER SEATING (125" WB)



OPTIONAL TRAVEL BED REPLACING CENTER SEAT (PROVIDES 5-PASSENGER SEATING)




OPTIONAL 12-PASSENGER SEATING (G30 ONLY)
(STANDARD W/O C6P)



OPTIONAL TRAVEL BED REPLACING 3RD SEAT (PROVIDES 8-PASSENGER SEATING)

INSTRUMENTS



The standard instrument cluster gages and heater controls are set into the molded plastic instrument panel and have bright bezels. The large LH opening contains the speedometer, odometer, high beam indicator, and service-parking brake warning light. Diesel engine models will also have warning lights for low coolant, glow plugs and water-in-fuel.

The large RH opening contains the fuel gage with a graphic symbol. An "Unleaded Fuel Only" notation is carried on the face of the fuel gage for models which require this fuel. The upper small opening between these two large openings houses the warning lights with graphic symbols for temperature, low oil pressure and generator. The lower opening is provided to house the RPO U35 electric clock.

On the upper RH side the two small openings are provided to house the controls for the RPO C36 rear heater (LH) and the RPO C69 rear air conditioner (RH). Below these openings are the heater/defogger and optional front air conditioner controls with graphic symbols for the fan and defogger. A similar instrument cluster with voltmeter, oil pressure gage and engine temperature gage is available as RPO Z53.

The area below the instrument cluster contains, from left to right, the windshield washer/wiper switch, with graphic symbol, main light switch, and ignition switch. This lower area has a black applique with bright trim. At the far left is the provision for the LH front air conditioner air outlet.

INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

Please Note: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available primary/secondary exterior color combinations are those shown in the chart below; however, any available interior trim color may be ordered with one of these exterior color combinations if that particular combination is desired by the customer.

INTERIOR COLORS		Model Option	Blue	Burgundy	Mahogany	Saddle Tan	Slate Grey	
STANDARD INTERIOR		Std.						
Vinyl High Back Bucket Seats			VDD4			VSS4		
Custom Vinyl High Back Bucket Seats			XDD4			XSS4		
BONAVENTURE/RALLY CUSTOM (N/A G11006) Custom Vinyl High Back Bucket Seats		ZM2	XDD4	XEE4		XSS4	XTT4	
BEAUVILLE/RALLY STX (N/A G11006)		E94						
Custom Cloth High Back Bucket Seats			XDD4	XEE4		XSS4	XTT4	
Custom Cloth High Back Bucket Seats Custom Cloth Reclining Bucket Seats			KDD4 KDD6	KEE4 KEE6	KNN4 KNN6	KSS4	KTT4	
EXTERIOR COLORS	.3		KDDO	KEEO	KININO	KSS6	KTT6	
w/ZY1, ZY3 or ZY4 PAINT	Primary	Secondary		RECOMMENDE	D INTERIOR	TRIM COLOR	S	STRIPE COLOR w/D85
BLUE, LIGHT (Metallic)	21	21	X	•••••			X	Light Blue/Dark Blue
Blue, Galaxy (Metallic) White, Frost	21	28 12	X	*************				Light Blue/Dark Blue
			X					Light Blue/Dark Blue
BLUE, GALAXY (Metallic) Silver (Metallic)	28 28	28 16	X				X	Light Blue/Dark Blue
White, Frost	28	12	X				X	Light Blue/Dark Blue
BRONZE, INDIAN (Metallic)			************					Light Blue/Dark Blue
Tan, Doeskin	66 66	66 61			X	XX		Doeskin/Dark Brown
White, Frost	66	12			X			Doeskin/Dark Brown Doeskin/Dark Brown
RED, APPLE	72	72		······································		· · · · · · · · · · · · · · · · · · ·		
Silver (Metallic)	72	16	•••••	X	•••••	X		Vermillion/Black
Tan, Doeskin	72	61		X		X	•••••	Vermillion/Black Vermillion/Black
White, Frost	72	12	•••••••	×	 	hanning a	••••	Vermillion/Black
RED, AUTUMN (Metallic)	76	76		X				Vermillion/Black
Silver (Metallic)	76	16		x			Х	Vermillion/Black
Tan, Doeskin	76	61		X				Vermillion/Black
White, Frost	76	12		X				Vermillion/Black
SAND, DESERT (Metallic)	64	64			×	X		Doeskin/Dark Brown
Tan, Doeskin	64	61				X		Doeskin/Dark Brown
White, Frost	64	12				X		Doeskin/Dark Brown
SILVER (Metallic)	16	16	Х	×			Х	Vermillion/Dark Carmine
Blue, Galaxy (Metallic)	16	28	X					Light Blue/Dark Blue
Red, Apple	16	72		X			X	Vermillion/Dark Carmine
White, Frost	16	12					Х	Vermillion/Dark Carmine
TAN, DOESKIN	61	61			Х	Х		Dark Brown/Doeskin
White, Frost	61	12				X		Dark Brown/Doeskin
WHITE, FROST	12	12	Х					Light Blue/Dark Blue
WHITE, FROST	12	12		Х				Doeskin/Dark Carmine
WHITE, FROST	12	12			X			Doeskin/Dark Brown
WHITE, FROST	12	12				Х		Dark Brown/Doeskin
WHITE, FROST	12	12					X	Vermillion/Black
Blue, Galaxy (Metallic)	12	28	X					Light Blue/Dark Blue
Red, Apple	12	72		X			X	Vermillion/Dark Carmine
Silver (Metallic)	12	16		•••••			X	Vermillion/Dark Carmine
Tan, Doeskin	12	61				X		Dark Brown/Doeskin
YELLOW, COLONIAL	53	53			X	X		Doeskin/Dark Brown
Tan, Doeskin	53	61				X		Doeskin/Dark Brown
White, Frost	53	12	. Oak Oamb		1-1	Х		Doeskin/Dark Brown
w/ZY5 PAINT (Interior & Exterior Com				nations Availab	iic)			STRIPE COLOR
BLUE, LIGHT (Metallic)/Silver (Met)	21	16	Х					Light Blue/Dark Blue
BLUE, GALAXY (Metallic)/Silver (Met)	28	16	X					Light Blue/Dark Blue
BRONZE, INDIAN (Met)/White, Frost	66	12			Х			Dark Brown/Doeskin
BRONZE, INDIAN (Met)/Tan, Doeskin	66	61			Χ	X		Dark Brown/Doeskin
RED, APPLE/Silver (Metallic)	72	16		X				Vermillion/Dark Carmine
RED, APPLE/Tan, Doeskin	72	61		Х		Х	***************************************	Vermillion/Dark Carmine
SILVER (Metallic)/Blue, Light (Met)	16	21	Х					Light Blue/Dark Blue
SILVER (Metallic)/Red, Apple	16	72	•••••					

SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below.



Solid color paint (ZY1) is standard on all models. All painted areas of the body are the same color.



e

Special two-tone (ZY3) paint colors include black body side and rear moldings with bright trim plus bright tail light trim (except with the Beauville/Rally STX model where bright tail light trim and bright body side and rear moldings with black trim are already included). The primary paint color is applied to the areas above the moldings. The secondary color is applied to the areas below the moldings.






Deluxe two-tone (ZY4) paint colors include black body side and rear moldings with bright trim plus bright tail light trim (except with the Beauville/Rally STX model where bright tail light trim and bright body side and rear moldings with black trim are already included). The primary paint color is applied to the areas above the belt line styling crease line and below the moldings. The secondary color is applied to the areas between the belt line styling crease line and the moldings.

*Optional at extra cost.

SOLID AND TWO-TONE* EXTERIOR COLOR COMBINATIONS

The application of paint for solid and two-tone exterior color combinations is shown below.

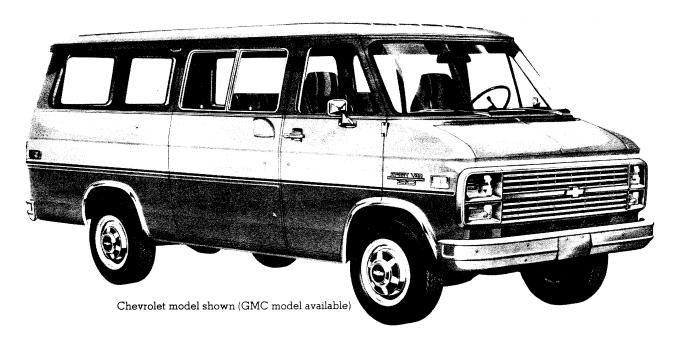

Exterior Decor Package (ZY5) paint colors and trim are available in a choice of eight combinations (see Interior and Exterior Color Availability Chart). The package includes black body side and rear moldings with bright trim plus bright wheel opening moldings, and bright tail light trim (except with the Beauville/Rally STX model where bright wheel opening moldings, bright tail light trim, and bright body side and rear moldings with black trim are already included). In addition, it includes dual-tone tape decal striping keyed to the interior trim and exterior body colors. This striping is applied just below the windows on the belt line crosses.

This striping is applied just below the windows on the belt line crease. The roof area above the drip rails and the area between the tape decal striping and the moldings are painted the primary paint color. The roof drip rails and the areas between the roof drip rails and the tape decal striping and below the moldings are painted the secondary color.

*Optional at extra cost.