




## CONTENTS

	<u>Page</u>
MODELS	2
STANDARD S-10 TRIM 2-DOOR	3
TAHOE (YC2) TRIM 2-DOOR	4
SPORT (YC3) TRIM 2-DOOR	5
TAHOE (YC2) TRIM 4-DOOR	6
SPORT (YC3) TRIM 4-DOOR	7
POWERTRAINS	8
STANDARD SUSPENSION	10
WHEELS AND TIRES	11
FRAME/STEERING/BRAKES	12
ELECTRICAL	13
COOLING	14
DIMENSIONS	15
OPTIONS	17
COLOR COMBINATIONS	20
EXTERIOR COLORS	B
INTERIOR TRIM	C
SEATS	D
TRAILERING	E


## 10 BLAZER

## TWO-WHEEL DRIVE MODELS

S-10  
2-DOOR BLAZER

MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX <sup>1</sup> PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CS10516/E55	100.5	4350	1154	2/4	4.3L V6/M5	4.3L V6/A4


**S-10 2-DOOR BLAZER**  
The S-10 2-door Blazer is offered in one wheelbase and a choice of V6 powertrains.

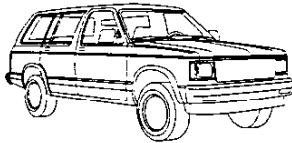S-10  
4-DOOR BLAZER

MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX <sup>1</sup> PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CS10506/E55	107.0	4850	1472	3/5/6	4.3L V6/M5	4.3L V6/A4


**S-10 4-DOOR BLAZER**  
The S-10 4-door Blazer, 2-wheel drive model, includes a standard 3-passenger front bench seat with Tahoe trim and 2-front bucket seats with Sport trim. A 3-passenger rear bench seat is available. It also features increased cargo length and volume as well as a higher GVWR capacity compared to the 2-door model.

## FOUR-WHEEL DRIVE MODELS

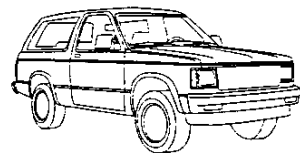S-10  
2-DOOR BLAZER

MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX <sup>1</sup> PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CT10516/E55	100.5	4700	1212	2/4	4.3L V6/M5	4.3L V6/A4

**S-10 2-DOOR BLAZER**  
The S-10 2-door Blazer features the versatility of four-wheel drive, in addition to V6 powertrain availability.

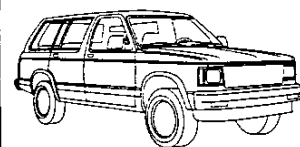S-10  
4-DOOR BLAZER

MODEL NUMBER	WB (IN.)	GVWR (LBS.)	MAX <sup>1</sup> PAYLOAD (LBS.)	PASS. CAP. (STD/OPT)	STD ENGINE/ TRANS	OPT ENGINE/ TRANS
CT10506/E55	107.0	5100	1375	3/5/6	4.3L V6/M5	4.3L V6/A4

**S-10 4-DOOR BLAZER**  
The S-10 4-door Blazer, 4-wheel drive model, offers the same front seating configurations as in the 4-door, 2-wheel drive model. However, the 3-passenger rear bench seat is standard. It also features the versatility of 4-wheel drive and increased cargo length and volume as well as higher GVWR capacity compared to the 2-door model.

<sup>1</sup>Based on curb weight.

## STANDARD S-10 (2-DOOR)

The Standard trim is the base trim level for the S-10 Blazer 2-door. It is designed to offer buyers a high level of standard features when purchasing a base-level truck.

*The following features are standard.*



Some equipment shown may be optional or extra cost.

### POWERTRAIN/CHASSIS

- ALTERNATOR: 85 amp Delcotron.
- BATTERY: 525 amp CCA.
- BRAKES: Power-assisted; front disc, rear drum. Includes rear-wheel anti-lock brake system.
- ENGINE: 4.3-liter V6 EFI. 160 net HP @ 4000 rpm and 230 lb. ft. of net torque @ 2800 rpm.
- EXHAUST: Single.

- FRAME: All-welded ladder-type channel design and boxed front-end section.
- FUEL TANK: 20-gallon (approx.).
- REAR AXLE: Hypoid, Semi-Floating. Ratio: 3.08:1.
- SHOCK ABSORBERS: Front—25 mm. Rear—25 mm.
- STABILIZER BAR: Front—1.14 in. on 2-wheel drive and 1.26 in. on 4-wheel drive.

- STEERING: Integral power. Ratio: 17.5:1.
- SUSPENSION: Front—Independent with computer-selected coil springs on 2-wheel drive and torsion bars on 4-wheel drive. Rear—Semi-Elliptic two-stage multi-leaf springs.
- TOW HOOKS: Front-mounted on the 4-wheel drive.
- TRANSMISSION: 5-speed manual with overdrive.

### EXTERIOR

- AIR DAM: Black.
- BUMPER: Front and rear chromed with black rub strips. Front includes integral parking lamps.
- COLORS: Choice of ten in a solid paint scheme. See Color and Trim specifications for details.
- DOOR HANDLES: Black finish.

- GRILLE: Chrome and dark gray molded plastic with headlamp/side marker lamp bezels.
- HEADLAMPS: Single rectangular halogen.
- HORN: Single electric high-note.
- MIRRORS: Black RH and LH below-eye-line type. Head size is 6.0" x 7.0".
- NAMEPLATE: "4 x 4" plaque on door pillar.

- on the 4-wheel drive model. "Blazer" on lower feature line molding area.
- TIRES: Four P205/75R15 all-season belted radials.
- WHEELS: Four 15" x 6" steel painted argent with bright metal hub caps on the 2-wheel drive and painted black on the 4-wheel drive.

### INTERIOR

- ARMRESTS: RH and LH padded integral with the door panels.
- CIGARETTE LIGHTER: Located on instrument panel. Includes ashtray light.
- COAT HOOKS: RH and LH.
- COLORS: Choice of four—Blue, Garnet, Charcoal or Saddle.
- CONVENIENCE TRAY
- DOME LAMP: Front and rear with bright trim and switches in RH and LH door jambs. Switches also operate door-courtesy lamp.
- DOOR PANELS: Color-keyed plastic with map pockets and gray housing in door latch release area.
- DOOR SILL PLATE: Black. Also, endgate scuff plate is color-keyed.

- FLOOR COVERING: Color-keyed carpeting.
- GAGES: Including speedometer, odometer, trip odometer, fuel level, voltmeter, temperature, oil pressure gages and additional telltale lights.
- GLOVE BOX: Includes locking door.
- HEADLAMP WARNING BUZZER: Headlamps on.
- HEADLINER: Full-foam with color-keyed cloth cover. Includes grab handles over all passenger seating positions.
- HEATER: Deluxe with windshield and side window defoggers.
- INSULATION: Provided on the dash panel, doors, roof, and floor.
- MIRROR: 10-inch rearview.

- RADIO: Electronically-tuned AM with two 4" x 6" front dash standard speakers, digital clock and fixed mast antenna. (Please refer to the Delco Electronics brochure in RPO Detail for further information).
- SEATS: High-back buckets with folding backs and leather-grained Custom Vinyl. RH seat includes easy-entry feature.
- SPARE TIRE/ WHEEL: Full-size with steel wheel located at left rear. Includes spare tire cover.
- STEERING WHEEL: 2-spoke deluxe black.
- SUNSHADES: Padded, color-keyed RH and LH.
- TOOLS: Mechanical jack and wheel wrench located at left rear storage compartment.
- WINDOWS: Tinted glass.

## -10 BLAZER

## TAHOE (2-DOOR)

32)

The Tahoe trim is an optional trim level for the S-10 Blazer 2-door. It is designed to offer truck buyers an increased level of comfort and convenience features compared to the Standard trim.

*The following features are standard. Bold type denotes equipment in addition to or replacing that of the Standard S-10 Blazer trim level.*



Some equipment shown may be optional or extra cost. (4-Door Model Shown)

## POWERTRAIN/CHASSIS

- ALTERNATOR: 85 amp Delcotron.
- BATTERY: 525 amp CCA.
- BRAKES: Power-assisted; front disc, rear drum. Includes rear-wheel anti-lock brake system.
- ENGINE: 4.3-liter V6 EFI. 160 net HP @ 4000 rpm and 230 lb. ft. of net torque @ 2800 rpm.
- EXHAUST: Single.
- FRAME: All-welded ladder-type, channel design and boxed front-end section.
- FUEL TANK: 20-gallon (approx.).
- REAR AXLE: Hypoid, Semi-Floating. Ratio: 3.08:1.
- SHOCK ABSORBERS: Front—25 mm. Rear—25 mm.
- STABILIZER BAR: Front—1.14 in. on 2-wheel drive and 1.26 in. on 4-wheel drive.
- STEERING: Integral power. Ratio: 17.5:1.
- SUSPENSION: Front—Independent with computer-selected coil springs on 2-wheel drive and torsion bars on 4-wheel drive. Rear—Semi-Elliptic two-stage multi-leaf springs.
- TOW HOOKS: Front-mounted on the 4-wheel drive.
- TRANSMISSION: 5-speed manual with overdrive.

## EXTERIOR

- AIR DAM: Black.
- BODY SIDE MOLDINGS: **Black with bright insert.**
- BUMPER: Front and rear chromed with black rub strips. Front includes integral parking lamps.
- COLORS: Choice of ten in a solid paint scheme. See Color and Trim specifications for details.
- DOOR HANDLES: Black finish.
- ENGINE COMPARTMENT LAMP: **Located under the hood at rear.**
- GRILLE: Chrome and dark gray molded plastic with headlamp/side marker lamp bezels.
- HEADLAMPS: Single rectangular halogen.
- HORN: Single electric high-note.
- INSULATION: **Hood insulation and cowl-to-fender seals.**
- MIRRORS: Black RH and LH below-eye-line type. Head size is 6.0"x7.0".
- NAMEPLATE: "4x4" plaque on door pillar. on the 4-wheel drive model. "Blazer" on lower feature line molding area.
- TIRES: Four P205/75R15 all-season steel-belted radials.
- TRIM: **Bright taillight trim with black applique.**
- WHEEL OPENING MOLDINGS: **Bright.**
- WHEELS: **Four 15" x 6" Rally with black center insert and gold "bowtie", silver rims and trim rings on 2-wheel drive. Four 15" x 6" silver steel with trim rings on 4-wheel drive.**

## INTERIOR

- ARMRESTS: RH and LH padded integral with door panels.
- CIGARETTE LIGHTER: Located on instrument panel. Includes ashtray light.
- COAT HOOKS: RH and LH.
- COLORS: Choice of four—Blue, Garnet, Charcoal or Saddle.
- CONVENIENCE TRAY
- DOME LAMP: Front and rear with bright trim and switches in RH and LH door jambs. Switches also operate a door-courtesy lamp.
- DOOR PANELS: **Custom Cloth upper insert, carpeted lower insert with map pocket plus coin holder in LH door.**
- DOOR SILL PLATE: Black. Also, endgate scuff plate is color-keyed.
- FLOOR CONSOLE: **With latching, located between front bucket seats.**
- FLOOR COVERING: **Color-keyed front and rear floor mats over carpeting.**
- GAGES: Including speedometer, odometer, trip odometer, fuel level, voltmeter, temperature, oil pressure gages and additional telltale lights.
- GLOVE BOX: Includes locking door.
- HEADLAMP WARNING BUZZER: Headlamps on.
- HEADLINER: Full-foam with color-keyed cloth cover. Includes grab handles over all passenger seating positions.
- HEATER: Deluxe with windshield and side window defoggers.
- INSULATION: Provided on the dash panel, doors, roof, and floor.
- KICK PANELS: **Color-keyed cowl kick, carpeted lower rear quarter and endgate panels.**
- MIRRORS: 10-inch rearview with **dual reading lamps. Also, RH visor mirror.**
- RADIO: Electronically-tuned AM with two 4" x 6" front dash standard speakers, digital clock and fixed mast antenna. (Please refer to the Delco Electronics brochure in RPO Detail for further information).
- SEATS: High-back **reclining** buckets with folding backs **and a choice of Custom Vinyl, Special Custom Cloth or Leather trim.** RH seat includes easy-entry feature.
- SPARE TIRE/ WHEEL: Full-size with steel wheel located at left rear. Includes spare tire cover.
- STEERING WHEEL: 2-spoke deluxe black.
- SUNSHADES: Padded, color-keyed RH and LH.
- TOOLS: Mechanical jack and wheel wrench located at left rear storage compartment.
- WINDOWS: Tinted glass.

## SPORT (2-DOOR) (YC3)

The Sport trim level is an optional trim level for the S-10 Blazer 2-door model lineup. It is designed to offer buyers an increased level of comfort and convenience features compared to the Standard S-10 Blazer trim level and the optional Tahoe trim level.

*The following features are standard. Bold type denotes equipment in addition to or replacing that of the Tahoe trim level.*



Some equipment shown may be optional or extra cost. (4-Door model shown).

### POWERTRAIN/CHASSIS

- ALTERNATOR: 85 amp Delcotron.
- BATTERY: 525 amp CCA.
- BRAKES: Power-assisted; front disc, rear drum. Includes rear-wheel anti-lock brake system.
- ENGINE: 4.3-liter V6 EFI. 160 net HP @ 4000 rpm and 230 lb. ft. of net torque @ 2800 rpm.
- EXHAUST: Single.
- FRAME: All-welded ladder-type, channel design and boxed front-end section.
- FUEL TANK: 20-gallon (approx.).
- REAR AXLE: Hypoid, Semi-Floating. Ratio: 3.08:1.
- SHOCK ABSORBERS: Front—25 mm. Rear—25 mm.
- STABILIZER BAR: Front—1.14 in. on 2-wheel drive and 1.26 in. on 4-wheel drive.
- STEERING: Integral power. Ratio: 17.5:1.
- SUSPENSION: Front—Independent with computer-selected coil springs on 2-wheel drive and torsion bars on 4-wheel drive. Rear—Semi-Elliptic two-stage multi-leaf springs.
- TOW HOOKS: Front-mounted on the 4-wheel drive.
- TRANSMISSION: 5-speed manual with overdrive.

### EXTERIOR

- AIR DAM: Black.
- BUMPER: **Color-keyed** front and rear with black rub strips. Front includes integral parking lamps.
- COLORS: Choice of ten in a solid paint scheme. See Color and Trim specifications for details.
- DOOR HANDLES: Black finish.
- ENGINE COMPARTMENT LAMP: Located under the hood at rear.
- GRILLE: **Black** molded plastic with **matching** headlamp/side marker lamp bezels.
- HEADLAMPS: Single rectangular halogen.
- HORN: Single electric high-note.
- INSULATION: Hood insulation and cowl-to-fender seals.
- MIRRORS: Black RH and LH below-eye-line type. Head size is 6.0" x 7.0".
- NAMEPLATE: "4 x 4" plaque on door pillar on the 4-wheel drive. "Blazer" on lower feature line molding area.
- TIRES: Four P205/75R15 all-season belted radials.
- TRIM: **Black** taillight trim with black applique.
- WHEEL OPENING MOLDINGS: **Black**.
- WHEELS: **Four 15" x 7" cast aluminum painted gray on the 2-wheel drive and 4-wheel drive; includes black vent and lug nut pockets and a "4 x 4" logo.**

### INTERIOR

- ARMRESTS: RH and LH padded integral with door panels.
- CIGARETTE LIGHTER: Located on instrument panel. Includes ashtray light.
- COAT HOOKS: RH and LH.
- COLORS: Choice of four—Blue, Garnet, Charcoal or Saddle.
- CONVENIENCE TRAY
- DOME LAMPS: Front and rear with bright trim and switches in RH and LH door jambs. Switches also operate a door-courtesy lamp.
- DOOR PANELS: Custom cloth upper insert, carpeted lower insert with map pocket plus coin holder in LH door.
- DOOR SILL PLATE: Black. Also, endgate scuff plate is color-keyed.
- FLOOR CONSOLE: Located between front bucket seats.
- FLOOR COVERING: Color-keyed front and rear floor mats over carpeting.
- GAGES: Including speedometer, odometer, trip odometer, fuel level, voltmeter, temperature and oil pressure gages and additional telltale lights.
- GLOVE BOX: Includes locking door.
- HEADLAMP WARNING BUZZER: Headlamps on.
- HEADLINER: Full-foam with color-keyed cloth cover. Includes grab handles over all passenger seating positions.
- HEATER: Deluxe with windshield and side window defoggers.
- INSULATION: Provided on the dash panel, doors, roof, and floor.
- KICK PANELS: Color-keyed cowl kick, carpeted lower rear quarter and endgate panels. **Deluxe Cloth trim panel inserts.**
- MIRRORS: 10-inch rearview with dual reading lamps. Also, RH visor mirror.
- RADIO: Electronically-tuned AM with two 4" x 6" front dash standard speakers, digital clock and fixed mast antenna. (Please refer to the brochure in RPO Detail for further information).
- SEATS: High-back reclining buckets with folding backs and **Deluxe Cloth or Leather trim**. RH seat includes easy-entry feature.
- SPARE TIRE/ WHEEL: Full-size with steel wheel located at left rear. Includes spare tire cover.
- STEERING WHEEL: Black sport with simulated leather look.
- SUNSHADES: Padded, color-keyed RH and LH.
- TOOLS: Mechanical jack and wheel wrench located at left rear storage compartment.
- WINDOWS: Tinted glass.

## -10 BLAZER

## TAHOE (4-DOOR)

2)

The Tahoe trim is the base trim level for the S-10 Blazer 4-door. It is designed to offer truck buyers a high level of comfort and convenience features.

*The following features are standard. Bold type denotes equipment in addition to or replacing that of the Tahoe 2-door trim.*



Some equipment shown may be optional or extra cost.

## POWERTRAIN/CHASSIS

- ALTERNATOR: 85 amp Delcotron.
- BATTERY: 525 amp CCA.
- BRAKES: Power-assisted; front disc, rear drum. Includes 4-wheel anti-lock brake system.
- ENGINE: 4.3-liter V6 EFI. 160 net HP @ 4000 rpm and 230 lb. ft. of net torque @ 2800 rpm.
- EXHAUST: Single.
- FRAME: All-welded ladder-type, channel design and boxed front-end section.
- FUEL TANK: 20-gallon (approx.).
- REAR AXLE: Hypoid, Semi-Floating. Ratio: 3.08:1.
- SHOCK ABSORBERS: Front—**32 mm**. Rear—**32 mm**.
- STABILIZER BAR: Front—1.14 in. on 2-wheel drive and 1.26 in. on 4-wheel drive.
- STEERING: Integral Power. Ratio: 17.5:1.
- SUSPENSION: Front—Independent with computer-selected coil springs on 2-wheel drive and torsion bars on 4-wheel drive. Rear—Semi-Elliptic two-stage multi-leaf springs.
- TOW HOOKS: Front-mounted on the 4-wheel drive model.
- TRANSMISSION: 5-speed manual with overdrive.

## EXTERIOR

- AIR DAM: Black.
- BODY SIDE MOLDINGS: Black with bright sert.
- BUMPER: Front and rear chromed with black rub strips. Front includes integral parking lamps.
- COLORS: Choice of ten in a solid paint scheme. See Color and Trim specifications for details.
- DOOR HANDLES: Black finish.
- ENGINE COMPARTMENT LAMP: Located under the hood at rear.
- GRILLE: Chrome and dark gray molded plastic with headlamp/side marker lamp bezels.
- HEADLAMPS: Single rectangular halogen.
- HORN: Single electric high-note.
- INSULATION: Hood insulation and cowl-to-fender seals.
- MIRRORS: Black RH and LH below-eye-line type. Head size is 6.0" x 7.0".
- NAMEPLATE: "4 x 4" plaque on door pillar on the 4-wheel drive. "Blazer" on lower feature line molding area.
- TIRES: Four P205/75R15 all-season steel-belted radials.
- TRIM: Bright taillight trim with black applique.
- WHEEL OPENING MOLDINGS: Bright.
- WHEELS: Four 15" x 7" Rally with black center insert and gold "bow tie", silver rims and trim rings on the 2-wheel drive. Four 15" x 6" silver steel with trim rings on the 4-wheel drive.

## INTERIOR

- ARMRESTS: RH and LH padded integral with the door panels.
- CIGARETTE LIGHTER: Located on instrument panel. Includes ashtray light.
- COAT HOOKS: RH and LH.
- COLORS: Choice of four—Blue, Garnet, Charcoal or Saddle.
- CONVENIENCE TRAY
- DOME LAMPS: Front and rear with bright trim switches in RH and LH door jambs. Switches also operate a door-courtesy lamp.
- DOOR PANELS: **Special Custom Cloth** upper insert, carpeted lower insert with map pocket plus coin holder in LH door.
- DOOR SILL PLATE: Black. Also, endgate scuff plate is color-keyed.
- FLOOR CONSOLE: With latching, located between front bucket seats.
- FLOOR COVERING: Color-keyed front and rear floor mats over carpeting.
- GAGES: Including speedometer, odometer, trip odometer, fuel level, voltmeter, temperature and oil pressure gages and additional telltale lights.
- GLOVE BOX: Includes locking door.
- HEADLAMP WARNING BUZZER: **Headlamps on.**
- HEADLINER: Full-foam headliner with color-keyed cloth cover. Includes grab handles over all passenger seating positions.
- HEATER: Deluxe with windshield and side window defoggers.
- INSULATION: Provided on the dash panel, doors, roof, and floor.
- KICK PANELS: Color-keyed cowl kick, carpeted lower rear quarter and endgate panels.
- MIRRORS: 10-inch rearview with dual reading lamps. Also, RH visor mirror.
- RADIO: Electronically-tuned AM with two 4" x 6" front dash standard speakers, digital clock and fixed mast antenna. (Please refer to the Delco Electronics brochure in RPO Detail for further information).
- SEATS: **Front—3-passenger bench in Special Custom Cloth.**  
**Rear—3-passenger folding bench on the 4-wheel drive.**
- SPARE TIRE/ WHEEL: Full-size with steel wheel located at left rear. Includes spare tire cover.
- STEERING WHEEL: 2-spoke deluxe black.
- SUNSHADES: Padded, color-keyed RH and LH.
- TOOLS: Mechanical jack and wheel wrench located at left rear storage compartment.
- WINDOWS: Tinted glass.

## SPORT (4-DOOR) (YC3)

The Sport trim level is an optional trim level for the S-10 Blazer 4-door. It is designed to offer truck buyers an increased level of comfort and convenience features compared to the Tahoe trim.

*The following features are standard. Bold type denotes equipment in addition to or replacing that of the Tahoe trim level.*



Some equipment shown may be optional or extra cost.

### POWERTRAIN/CHASSIS

- ALTERNATOR: 85 amp Delcotron.
- BATTERY: 525 amp CCA.
- BRAKES: Power-assisted: front disc, rear drum. Includes 4-wheel anti-lock brake system.
- ENGINE: 4.3-liter V6 EFI. 160 net HP @ 4000 rpm and 230 lb. ft. of net torque @ 2800 rpm.
- EXHAUST: Single.

- FRAME: All-welded ladder-type, channel design and boxed front-end section.
- FUEL TANK: 20-gallon (approx.).
- REAR AXLE: Hypoid, Semi-Floating. Ratio: 3.08:1.
- SHOCK ABSORBERS: Front—32 mm. Rear—32 mm.
- STABILIZER BAR: Front—1.14 in. on 2-wheel drive and 1.26 in. on 4-wheel drive.

- STEERING: Integral power ratio: 17.5:1.
- SUSPENSION: Front—Independent with computer-selected coil springs on 2-wheel drive and torsion bars on 4-wheel drive. Rear—Semi-Elliptic two-stage multi-leaf springs.
- TOW HOOKS: Front-mounted on 4-wheel drive.
- TRANSMISSION: 5-speed manual with overdrive.

### EXTERIOR

- AIR DAM: Black.
- BUMPER: **Color-keyed** front and rear with black rub strips. Front includes integral parking lamps.
- COLORS: Choice of ten in a solid paint scheme. See Color and Trim specifications.
- DOOR HANDLES: black finish.
- ENGINE COMPARTMENT LAMP: Located under the hood at rear.

- GRILLE: **Black** molded plastic with **matching** headlamp/side marker lamp bezels.
- HEADLAMPS: Single rectangular halogen.
- HORN: Single electric high-note.
- INSULATION: Hood insulation and cowl-to-fender seals.
- MIRRORS: Black RH and LH below-eye-line type. Head size is 6.0" x 7.0".
- NAMEPLATE: "4 x 4" plaque on door pillar on the 4-wheel drive. "Blazer" on lower

- feature line molding area.
- TIRES: Four P205/75R15 all-season steel-belted radials.
- TRIM: **Black** taillight trim with black applique.
- WHEEL OPENING MOLDINGS: **Black**.
- WHEELS: **Four 15" x 7" cast aluminum painted gray on the 2-wheel drive and 4-wheel drive, includes black vent and lug nut pockets and a "4 x 4" logo.**

### INTERIOR

- ARMRESTS: RH and LH padded integral with the door panels.
- CIGARETTE LIGHTER: Located on instrument panel. Includes ashtray light.
- COAT HOOKS: RH and LH.
- COLORS: Choice of four—Blue, Garnet, Charcoal or Saddle.
- CONVENIENCE TRAY
- DOME LAMPS: Front and rear with bright trim and switches in RH and LH door jambs. Switches also operate a door-courtesy lamp.
- DOOR PANELS: Custom Cloth upper insert, carpeted lower insert with map pocket plus coin holder in LH door.
- DOOR SILL PLATE: Black. Also, endgate scuff plate is color-keyed.
- FLOOR CONSOLE: Located between front bucket seats.
- FLOOR COVERING: Color-keyed front and rear floor mats over carpeting.

- GAGES: Including speedometer, odometer, trip odometer, fuel level, voltmeter, temperature and oil pressure gages and additional telltale lights.
- GLOVE BOX: includes locking door.
- HEADLAMP WARNING BUZZER: Headlamps on.
- HEADLINER: Full-foam with color-keyed cloth cover. Includes grab handles over all passenger seating positions.
- HEATER: Deluxe with windshield and side window defoggers.
- INSULATION: Provided on the dash panel, doors roof or floor.
- KICK PANELS: Color-keyed cowl kick, carpeted lower rear quarter and endgate panels. **Deluxe Cloth trim panel inserts.**
- MIRRORS: 10-inch rearview with dual reading lamps. Also, RH visor mirror.

- RADIO: Electronically-tuned AM with two 4" x 6" front dash standard speakers, digital clock and fixed mast antenna. (Please refer to the Delco Electronics brochure in RPO Detail for further information).
- SEATS: **Front—2-passenger high-back reclining buckets in Deluxe Cloth or Leather trim.** Rear—3 passenger folding bench on 4-wheel drive only.
- SPARE TIRE/ WHEEL: Full-size with steel wheel located at left rear. Includes spare tire cover.
- STEERING WHEEL: Black sport with simulated leather look.
- SUNSHADES: Padded, color-keyed RH and LH.
- TOOLS: Mechanical jack and wheel wrench located at left rear storage compartment.
- WINDOWS: Tinted glass.


**HORSEPOWER AND TORQUE RATINGS**

ENGINE	4.3L V6
RPO CODE	LB4
SAE NET HORSEPOWER @ RPM	160 @ 4000
SAE NET TORQUE Lb. Ft. @ RPM	230 @ 2800
FUEL SYSTEM	EFI
CLUTCH SIZE (in.)	11.02
STD. BATTERY Cold Cranking Amps @ -0°F	525

**TRANSFER CASE**

MODEL	NEW PROCESS 231
MODEL AVAILABILITY	4-wheel drive
RATIOS: Hi Range Lo Range	1.00:1 2.72:1
LEVER POSITIONS	4-Lo (All-wheel Underdrive) N (Neutral) 2-Hi (Rear-wheel Drive) 4-Hi (All-wheel Drive)
LEVER LOCATION	Rear of Transmission at Center of Floor
OIL CAPACITY (pints)	2.2

4.3L V6 RPO LB4  
HORSEPOWER: 160 @ 4000 RPM  
TORQUE: 230 @ 2800 RPM

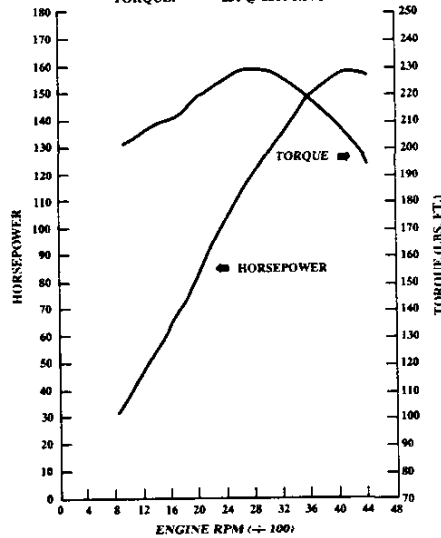

**TRANSMISSION**

**MANUAL**

**AUTOMATIC**

MODEL	MANUAL 5-SPEED w/ OVERDRIVE	AUTOMATIC 4-SPEED w/OVERDRIVE (4L60)
RPO CODE	MM5	MX0
SYNCHRONIZED SPEEDS	1/2/3/4/5	—
GEAR RATIOS		
First	4.02	3.06
Second	2.32	1.63
Third	1.40	1.00
Fourth	1.00	.70
Fifth	.83	—
Reverse	3.74	2.29
GEAR TYPE	—	Planetary
Forward	Helical	—
Reverse	Spur	—
Center Distance (mm.)	85	—
TORQUE CONVERTER	—	Pump/Stator/Turbine Automatic
Element Types	—	—
Lock-up Clutch	—	—
LUBRICANT CAPACITY (pints)		
Oil	3.7	—
Dry Fill	—	19
Refill	—	10



AXLES	REAR	FRONT—FOUR-WHEEL DRIVE
<b>MAKE AND CAPACITY</b> (lbs.)	GM 2700 (2-door)/2900 (4-door)	GM 2400
<b>PINION &amp; RING GEARS</b>	Hypoid	
Type	Hypoid	
Ratio	3.08	3.42
Pinion Teeth	13	12
Ring Gear Teeth	40	41
Ring Gear Diameter (in.)	7.6	7.6
<b>DIFFERENTIAL</b>	2-Pinion Tapered Roller	
Type	2-Pinion Tapered Roller	
Bearings, Type	—	
<b>AXLE SHAFTS</b>	Semi-Floating Integral Shaft and Drive Flange 1.33	
Type	Independent	
Min. Diameter (in.)	—	
<b>HOUSING @ SPRING SEAT</b>	2.69 x .116-.175	
Section Diameter and Thickness (in.)	—	
<b>LUBRICANT CAPACITY</b> (pints)	3.9	
	2.6	

KEY: S Standard O Optional — Not Offered **Bold**—Not Available w/High Altitude Emissions

MODEL	ENGINE	TRANSMISSION		AXLES		GVWR
		MANUAL 5-SPEED (MM5)	AUTO 4-SPEED (MX0)	ECONOMY—POWER		
				3.08	3.42	
<b>TWO AND FOUR-WHEEL DRIVE MODELS</b>						
S-10 2-DOOR BLAZER 4X2 CS10516/E55	4.3L V6 (LB4)	S <sup>1</sup>	O	S <sup>1</sup>	O	4350
S-10 4-DOOR BLAZER 4X2 CS10506/E55	4.3L V6 (LB4)	S <sup>1</sup>	O	S <sup>1</sup>	O	4850
S-10 2-DOOR BLAZER 4X4 CT10516/E55	4.3L V6 (LB4)	S <sup>1</sup>	O	<b>S<sup>1,3</sup></b>	<b>O<sup>2</sup></b>	4700
S-10 4-DOOR BLAZER 4X4 CT10506/E55	4.3L V6 (LB4)	S <sup>1</sup>	O	<b>S<sup>1,3</sup></b>	<b>O<sup>2</sup></b>	5100

<sup>1</sup>N/A G80 Locking Differential. <sup>2</sup>Standard Ratio w/High Altitude Emissions. <sup>3</sup>N/A w/QEB P235/75R15 WL Tires.

	TWO-WHEEL DRIVE		FOUR-WHEEL DRIVE	
MODEL	S-10 2-DOOR BLAZER	S-10 4-DOOR BLAZER	S-10 2-DOOR BLAZER	S-10 4-DOOR BLAZER
MODEL NUMBER	CS10516/E55	CS10506/E55	CT10516/E55	CT10506/E55
<b>STANDARD SUSPENSION</b>				
<b>PAYLOAD</b> (Maximum lbs.) <sup>1</sup>	1154	1472	1212	1375
<b>GVWR (lbs.)</b>	4350	4850	4700	5100
<b>GAWR (lbs.)</b> Front	2200	2200	2400	2400
Rear	2600	2900	2700	2900
<b>FRONT SUSPENSION</b>				
Type	Independent Coil Spring	Independent Coil Spring	Independent Driving Axle Torsion Bar	Independent Driving Axle Torsion Bar
Standard Spring Capacity (Total lbs.)	2200	2200	2400	2400
Front Shock Absorbers Piston Diameter (mm)	25	32	25	32
Front Stabilizer Bar Diameter (in.)	1.14	1.14	1.26	1.26
<b>REAR SUSPENSION</b>				
Type	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf	Semi-Elliptic 2-Stage Multi-Leaf
Standard Spring Capacity (Total lbs.)	2600	2900	2700	2900
Leaves Per Spring	3	3	3	3
Leaf Total Thickness (in.)	1.33	1.33	1.33	1.33
Rear Shock Absorbers Piston Diameter (mm)	25	32	25	32
<b>FRONT AXLE</b>				
Type	Independent	Independent	Independent	Independent
Make	—	—	GM	GM
Maximum Capacity (lbs.)	2200	2200	2400	2400
Standard Hub Locks	—	—	Differential Lockout	Differential Lockout
Pinion/Ring Gear Type	—	—	Hypoid	Hypoid
<b>REAR AXLE</b>				
Type	Semi-Floating	Semi-Floating	Semi-Floating	Semi-Floating
Make	GM	GM	GM	GM
Maximum Capacity (lbs.)	2700	2900	2700	2900
Pinion/Ring Gear Type	Hypoid	Hypoid	Hypoid	Hypoid
<b>STANDARD TIRES</b>				
Capacity (lbs.) each	Tubeless All-Season SBR P205/75R15 BW	Tubeless All-Season SBR P205/75R15 BW	Tubeless All-Season SBR P205/75R15 BW	Tubeless All-Season SBR P205/75R15 BW
Front/Rear	1452	1452	1452	1452
Inflation (psi) maximum	35	35	35	35
Revolutions per mile @ 45 mph	769	769	769	769
<b>WHEELS</b>				
Size (in.) Front/Rear	15.0 x 6.0	15.0 x 7.0	15.0 x 6.0	15.0 x 6.0
Capacity (lbs.) each	1453	1453	1453	1453
Bolt Holes	5	5	5	5
Bolt Circle Diameter (in.)	4.75	4.75	4.75	4.75
Rim Width (in.)	6.0	7.0	6.0	6.0
Offset (mm)	0	0	50	50

<sup>1</sup> Based on curb weight.

# WHEELS AND TIRES

199  
S-10 BLAZE

KEY: N/A - Not Available      BW - Blackwall      WOL - White Outline Lettered  
AS - All-Season      ON-OFF - On-Off Road  
SBR - Steel-Belted Radial Ply      WL - White Lettered


TWO-WHEEL DRIVE MODELS								
TIRES								
SIZE	TYPE	RPO	CONDITION	PLY	LOAD RANGE	CAPACITY (lbs. ea.)	INFLATION (psi) max.	REV. PER mile @ 45 mph
P205/75R15	AS SBR BW	QCE	STD	1	B	1452	35	768
P205/75R15	AS SBR WL	QCF	OPT	1	B	1452	35	768
P205/75R15	ON-OFF SBR BW	QJT	OPT	2 Poly 2 Steel	B	1452	35	769
P205/75R15	ON-OFF SBR WOL	QJL	OPT	2 Poly 2 Steel	B	1452	35	769
WHEELS <sup>1</sup>								
SIZE (in.)	TYPE	RPO	TRIM LEVEL	BOLT HOLES	BOLT CIRCLE dia. (in.)	CAPACITY (lbs. ea.)	OFFSET (mm.)	
15.0 x 6.0	STEEL (Painted argent)	—	Standard S-10	5	4.75	1453	0	
15.0 x 7.0	RALLY (Black disc & silver rim)	—	YC2 Tahoe	5	4.75	1453	-6.4	
15.0 x 7.0	CAST ALUMINUM (Painted gray)	N60	YC3 Sport; Also Opt. w/Standard S-10 and YC2 Tahoe	5	4.75	1453	-6.4	
15.0 x 7.0	RALLY	ZJ7	Opt. w/Standard S-10 (2-door only)	5	4.75	1453	-6.4	
FOUR-WHEEL DRIVE MODELS								
TIRES								
SIZE	TYPE	RPO	CONDITION	PLY	LOAD RANGE	CAPACITY (lbs. ea.)	INFLATION (psi) max.	REV. PER mi @ 45
P205/75R15	AS SBR BW	QCE	STD	1	B	1452	35	768
P205/75R15	AS SBR WL	QCF	OPT	1	B	1452	35	768
P205/75R15	ON-OFF SBR BW	QJT	OPT	2 Poly 2 Steel	B	1452	35	769
P205/75R15	ON-OFF SBR WOL	QJL	OPT	2 Poly 2 Steel	B	1452	35	769
P235/75R15	ON-OFF SBR WOL	QEB	OPT	2 Poly 2 Steel	B	1843	35	716
WHEELS <sup>1</sup>								
SIZE (in.)	TYPE	RPO	TRIM LEVEL	BOLT HOLES	BOLT CIRCLE dia. (in.)	CAPACITY (lbs. ea.)	OFFSET (mm.)	
15.0 x 6.0	STEEL (Painted silver)	—	Standard S-10; N/A w/QEB Tires	5	4.75	1453	50	
15.0 x 7.0	STEEL (Painted silver)	—	Standard S-10 and YC2 Tahoe	5	4.75	1453	50	
15.0 x 7.0	CAST ALUMINUM	N90	YC3 Sport; Also Opt. w/Standard S-10 and YC2 Tahoe	5	4.75	1453	50	

<sup>1</sup>All Spare Wheels are Steel

		TWO WHEEL DRIVE		FOUR WHEEL DRIVE	
MODEL		S-10 2-DOOR BLAZER	S-10 4-DOOR BLAZER	S-10 2-DOOR BLAZER	S-10 4-DOOR BLAZER
MODEL NUMBER		CS10516/E55	CS10506/E55	CT10516/E55	CT10506/E55
<b>FRAME</b>					
Side Rail Dimensions Width (in.)		2.28	2.28	2.28	2.28
Depth (in.)		5.00	5.00	5.00	5.00
Thickness (in.)		.118	.118	.118	.118
Section Modulus Rails only		1.78	1.78	1.78	1.78
RBM of Frame		69,420	69,420	69,420	69,420
Width Over Rails					
Front (in.)		30.9	30.9	30.9	30.9
Rear (in.)		40.35	40.35	40.35	40.35
Overall Length of Rail (in.)		162.46	168.96	162.46	168.96
<b>STEERING</b>					
Type		Fixed Integral Power	Fixed Integral Power	Fixed Integral Power	Fixed Integral Power
Steering Ratio		17.5:1	17.5:1	17.5:1	17.5:1
Turning Diameter					
Curb-to-Curb (ft.)		34.6	35.4	35.4	37.1
Wall-to-Wall (ft.)		36.4	37.6	37.2	39.1
<b>BRAKES</b>					
GVWR (lbs)		4350	4850	4700	5100
Type		Vac. Power Front Disc/Rear Drum w/ Rear-Wheel Anti-Lock System	Vac. Power Front Disc/Rear Drum w/ 4-Wheel Anti-Lock System	Vac. Power Front Disc/Rear Drum w/ Rear-Wheel Anti-Lock System	Vac. Power Front Disc/Rear Drum w/ 4-Wheel Anti-Lock System
Booster Diaphragm Diameter (in.)		9.4 x 7.9 Tandem	9.4 x 7.9 Tandem	9.4 x 7.9 Tandem	9.4 x 7.9 Tandem
Front Rotor Size Diameter x Thickness (in.)		10.5 x 1.03	10.5 x 1.03	10.5 x 1.03	10.5 x 1.03
Front Facing Contact Per Axle (sq. in.)		31.68	31.68	31.68	31.68
Rear Drum Size Diameter x Width (in.)		9.5 x 2.0	9.5 x 2.0	9.5 x 2.0	9.5 x 2.0
Rear Facing Contact Per Axle (sq. in.)		63.73	63.73	63.73	63.73
Parking Brake Type		Cable To Rear Wheels	Cable To Rear Wheels	Cable To Rear Wheels	Cable To Rear Wheels

TWO-WHEEL DRIVE		FOUR-WHEEL DRIVE
MODEL	S-10 2-DOOR AND 4-DOOR BLAZER	S-10 2-DOOR AND 4-DOOR BLAZER
MODEL NUMBER	CS10516/E55 -CS10506/E55	CT10516/E55-CT10506/E55
<b>ELECTRICAL</b>		
ENGINE	4.3L V6	4.3L V6
<b>STANDARD BATTERY</b> Cold Cranking Amps @ 0°F @ -20°F Reserve Capacity Minutes @ 80°F	525 390 90	525 390 90
<b>OPTIONAL BATTERY</b> Cold Cranking Amps @ 0°F @ -20°F Reserve Capacity Minutes @ 80°F	UA1 630 470 115	UA1 630 470 115
<b>STANDARD ALTERNATOR</b> Max. Capacity (Amps) Max. Watts @ 12 Volts Nominal Amp @ Idle (approx.) Drive Pulley Ratio Model Number	85 1020 30 3:2:1 CS130	85 1020 30 3:2:1 CS130

**ALTERNATOR CURVES**

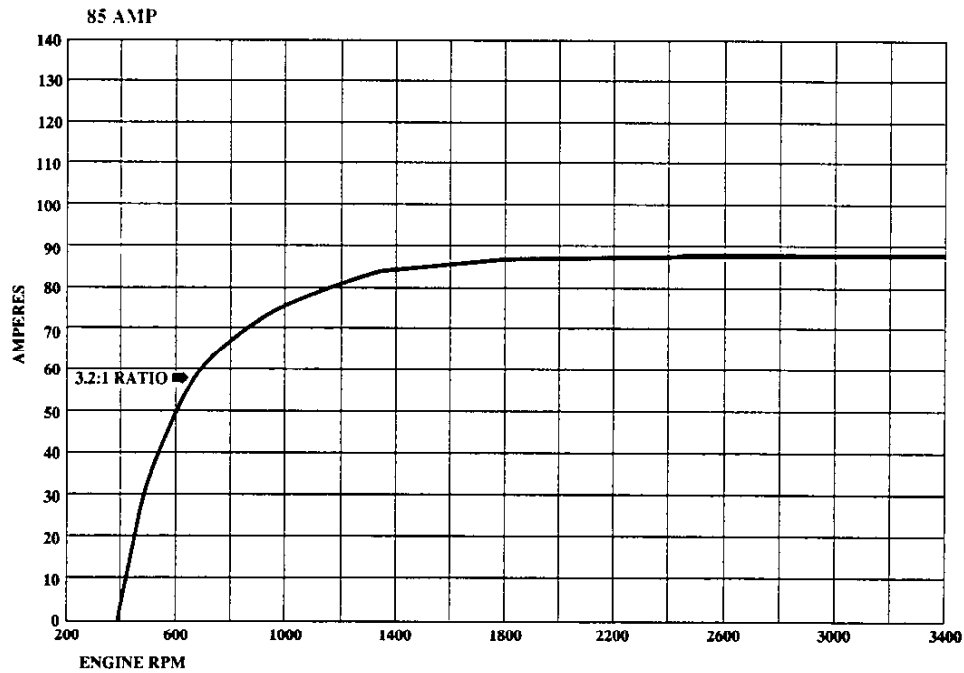

Bold Type Automatic Transmission Only. Reg. Type Manual and Automatic Transmissions.

**TWO-WHEEL DRIVE      FOUR-WHEEL DRIVE**

MODEL	S-10 2-DOOR BLAZER 4X2	S-10 4-DOOR BLAZER 4X2	S-10 2-DOOR BLAZER 4X4	S-10 4-DOOR BLAZER 4X4
MODEL NUMBER	CS10516/E55	CS10506/E55	CT10516/E55	CT10506/E55



**STANDARD COOLING SYSTEM**

ENGINE	4.3LV6	4.3LV6	4.3LV6	4.3LV6
Radiator Thickness (in.)	.93	.93	.93	.93
System Capacity (gal.)	3.0	3.0	3.0	3.0
Fan-No. Blades x Diameter x Pitch (in.)	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0

**OPTIONAL COOLING SYSTEMS**

ENGINE	4.3LV6	4.3LV6	4.3LV6	4.3LV6
<b>AUTOMATIC TRANSMISSION</b>	<b>MX0</b>	<b>MX0</b>	<b>MX0</b>	<b>MX0</b>
Radiator Thickness (in.)	.93	.93	.93	.93
System Capacity (gal.)	3.0	3.0	3.0	3.0
Fan-No. Blades x Diameter x Pitch (in.)	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0
<b>OPT. H.D. RADIATOR</b>	<b>V01</b>	<b>V01</b>	<b>V01</b>	<b>V01</b>
Radiator Thickness (in.)	.93	.93	.93	.93
System Capacity (gal.)	3.0	3.0	3.0	3.0
Fan-No. Blades x Diameter x Pitch (in.)	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0
<b>OPT. AIR CONDITIONING</b>	<b>C60</b>	<b>C60</b>	<b>C60</b>	<b>C60</b>
Radiator Thickness (in.)	.93	.93	.93	.93
System Capacity (gal.)	3.0	3.0	3.0	3.0
Fan-No. Blades x Diameter x Pitch (in.)	5 x 19 x 2.8	5 x 19 x 2.8	5 x 19 x 2.8	5 x 19 x 2.8
<b>OPT. ENG. OIL COOLER</b>	<b>KC4</b>	<b>KC4</b>	<b>KC4</b>	<b>KC4</b>
Radiator Thickness (in.)	.93	.93	.93	.93
System Capacity (gal.)	2.9	2.9	2.9	3.0
Fan-No. Blades x Diameter x Pitch (in.)	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0
<b>OPT. H.D. RADIATOR AND TRANS. OIL COOLER</b>	<b>V02</b>	<b>V02</b>	<b>V02</b>	<b>V02</b>
Radiator Thickness (in.)	1.34	1.34	1.34	1.34
System Capacity (gal.)	3.0	3.0	3.0	3.0
Fan-No. Blades x Diameter x Pitch (in.)	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0
<b>OPT. H.D. RADIATOR AND TRANS. OIL COOLER AND ENGINE OIL COOLER</b>	<b>V02 &amp; KC4</b>	<b>V02 &amp; KC4</b>	<b>V02 &amp; KC4</b>	<b>V02 &amp; KC4</b>
Radiator Thickness (in.)	1.34	1.34	1.34	1.34
System Capacity (gal.)	2.9	2.9	2.9	2.9
Fan-No. Blades x Diameter x Pitch (in.)	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0	3 x 18 x 2.0

		<b>TWO-WHEEL DRIVE</b>		<b>FOUR-WHEEL DRIVE</b>	
<b>MODEL</b>		<b>S-10 2-DOOR BLAZER</b>	<b>S-10 4-DOOR BLAZER</b>	<b>S-10 2-DOOR BLAZER</b>	<b>S-10 4-DOOR BLAZER</b>
<b>MODEL NUMBER</b>		<b>CS10516/E55</b>	<b>CS10506/E55</b>	<b>CT10516/E55</b>	<b>CT10506/E55</b>
<b>EXTERIOR DIMENSIONS</b>					
<b>BODY</b>					
Wheelbase (in.)	WB	100.5	107.0	100.5	107.0
Overall Length (in.)	OAL	170.3	176.8	170.3	176.8
Overall Height (in.)	OAH	64.1	64.1	64.3	64.3
Maximum Width (in.)	OAW	65.4	65.4	65.4	65.4
Bumper to Axle—Front (in.)	BA	30.6	30.6	30.6	30.6
Rear (in.)		39.2	39.2	39.2	39.2
Ground to top of Rear Load Floor (in.)	—	30.9	30.9	29.6	29.6
Ground Clearance	—				
Front (in.)		8.2	8.2	7.8	7.8
Rear (in.)		7.8	7.8	8.1	8.1
<b>SIGN PANEL AREA (in.)</b>	Shaded Area	12 <sup>3</sup> / <sub>4</sub> x 45	12 <sup>3</sup> / <sub>4</sub> x 45	12 <sup>3</sup> / <sub>4</sub> x 45	12 <sup>3</sup> / <sub>4</sub> x 45

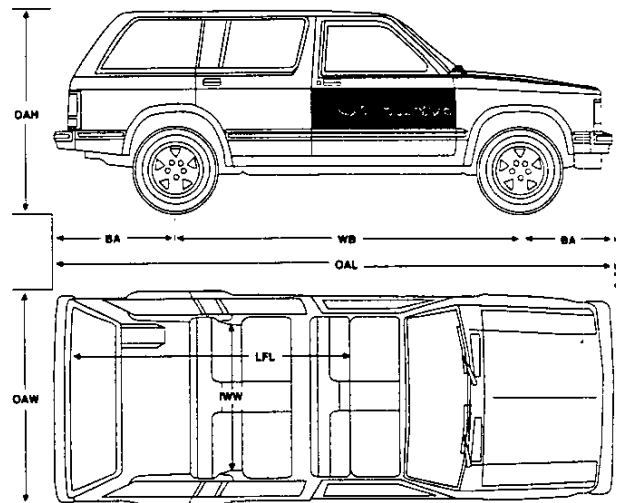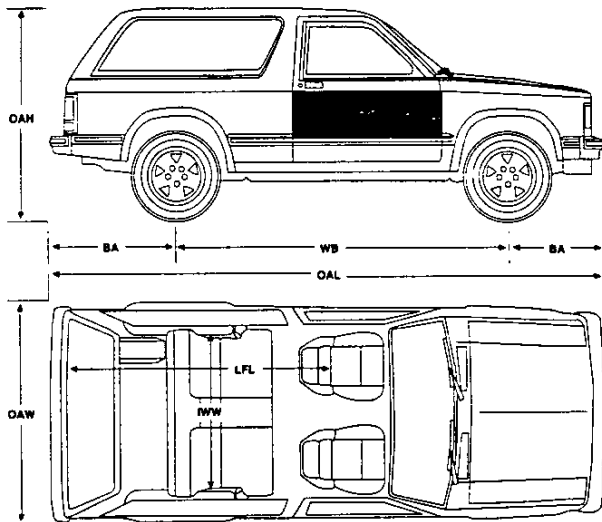

		<b>TWO-WHEEL DRIVE</b>		<b>FOUR-WHEEL DRIVE</b>	
<b>MODEL</b>		<b>S-10 2-DOOR BLAZER</b>	<b>S-10 4-DOOR BLAZER</b>	<b>S-10 2-DOOR BLAZER</b>	<b>S-10 4-DOOR BLAZER</b>
<b>MODEL NUMBER</b>		<b>CS10516/E55</b>	<b>CS10506/E55</b>	<b>CT10516/E55</b>	<b>CT10506/E55</b>
<b>INTERIOR DIMENSIONS</b>					
Headroom (in.) Front/Rear	HR	39.1/38.7	39.1/38.8	39.1/38.7	39.1/38.8
Legroom (in.) Front/Rear	LR	42.5/35.5	42.5/36.5	42.5/35.5	42.5/36.5
Shoulder Room (in.) Front/Rear	SR	53.9/56.1	53.9/55.6	53.9/56.1	53.9/55.6
Hip Room (in.) Front/Rear	HP	50.5/37.6	50.5/52.6	50.5/37.6	50.5/52.6
Interior Width (in.) Between Wheelhousings	IWW	38.4	38.4	38.4	38.4
Cargo Volume w/Rear Seat Up (cu. ft.)	CV	28.1	35.2	28.1	35.2
Cargo Volume w/ Rear Seat Folded (cu. ft.)	CV	67.3	74.3	67.3	74.3
Cargo Length w/ Rear Seat Up - @ Floor /Belt (in.)	CL	26.0	32.5	26.0	32.5
Cargo Length w/ Rear Seat Folded @ Floor Belt (in.)	CL	62.2	68.7	62.2	68.7
Cargo Area Width w/ Rear Seat Up (in.)	—	53.4	53.4	53.4	53.4
Cargo Area Height w/ Rear Seat Up (in.)	—	35.0	35.0	35.0	35.0
<b>FUEL TANK</b>					
Std. Tank Nominal (gal.) approx.		20	20	20	20
Location of Tank		Inboard LH Frame Rail	Inboard LH Frame Rail	Inboard LH Frame Rail	Inboard LH Frame Rail
Location of Filler		Left Side	Left Side	Left Side	Left Side



# OPTIONS

1991  
S-10 BLAZER

KEY S - Standard  
O - Optional  
— Not Available

1. S-10 2-DOOR BLAZER 4X2 (CS10516/E55)  
2. S-10 4-DOOR BLAZER 4X2 (CS10506/E55)  
3. S-10 2-DOOR BLAZER 4X4 (CT10516/E55)  
4. S-10 4-DOOR BLAZER 4X4 (CT10506/E55)

		MODELS				
		2-WHEEL DRIVE		4-WHEEL DRIVE		
		1	2	3	4	
<b>AIR CONDITIONING</b>	C60	Incls. V01 Cooling w/o V02 Cooling or KC4 Cooling				
<b>AIR DAM WITH FOG LAMPS</b>	ANL	Switch on Cluster	2-wheel drive only			
<b>AXLE, REAR</b>	G80	Locking Differential	Reqs Optional Axle Ratio			
<b>BATTERY</b>	UA1	Heavy-Duty, 630 Cold Cranking Amps Delco Freedom; Incl w/V10 Cold Climate				
<b>CARRIER, LUGGAGE</b>	ZM4	Black; Incls Rear Window Air Deflector	Chrome Roof Rub Strips on 2-door Models. Black Roof Rub Strips on 4-door Models			
<b>CARRIER, TIRE OUTSIDE SPARE</b>	P16	Incls Exterior Cover and Relocated Endgate Emblems; Recommended for QEB Tires				
<b>COLD CLIMATE PACKAGE</b>	V10	Incls UA1 Battery, Engine Block Heater, Special Insulation and Anti-freeze Protection to -32°				
<b>CONSOLE</b>	D55	Incl w/YC2 Tahoe or YC3 Sport				
<b>COOLING SYSTEM H.D. Engine Oil Cooler</b>	KC4	Integral in Radiator	N/A V01 Cooling. Req'd w/Z82 Trailing			
H.D. Radiator	V01	Incl w/C60 Air and Z72 Trailing	N/A V02 or KC4 Cooling			
Radiator and Transmission Oil Cooler	V02	Integral in Radiator	Reqs MX0 Trans			
<b>CONVENIENCE PACKAGE</b>						
Driver's	ZM7	Incls Comfortilt Steering and Intermittent Wipers				
Rear Window	ZM8	Incls Rear Defogger and Power Tailgate Release. Avail w/AA3 Glass	N/A w/AJ1 Glass			
Operating	ZQ2	Incls Power Door Locks and Power Windows				
<b>ENGINES</b>	LB4	(See Powertrains)				
<b>FLOOR COVERING</b>						
Full-Floor, Rubber Charcoal	BG9	Replaces Carpeting	N/A w/YC2 Tahoe or YC3, B32 or B33 Mats			
Mats, Removable, Color-Keyed, Front and Rear	B33	Incl w/YC2 Tahoe or YC3 Sport	N/A w/ BG9			
<b>GAGES, ELECTRONIC</b>	U52	Electronic Readout Voltmeter, Temperature, Oil Pressure, Fuel, Speedometer and Tachometer				
<b>GLASS</b>						
Deep Tinted, Side and Rear	AJ1	Lift Glass Quarter Window and Driver's Side Rear Window	N/A ZM8 Conv Package, C25 Rear Window Wiper/Washer or AA3 Glass			
Deep Tinted-Side	AA3	Quarter Window and Rear Door Window	N/A AJ1 Glass, Reqs ZM8 Conv Package			
<b>MIRRORS</b>						
Exterior, Electric Remote	D48	Single Control on Cluster Mirror Head Size is 4.0" x 6.5"				
Lighted Visor, RH and LH	D74	Light Switch on Mirror				
<b>MOLDINGS</b>						
Wheel Opening, Black	B74	Incl w/YC3 Sport				

NOTE: Refer to Dealer Order Guide for Updated Option Availability.

1991  
S-10 BLAZER

OPTIONS

- KEY S - Standard  
O - Optional  
— Not Available
1. S-10 2-DOOR BLAZER 4X2 (CS10516/E55)  
2. S-10 4-DOOR BLAZER 4X2 (CS10506/E55)  
3. S-10 2-DOOR BLAZER 4X4 (CT10516/E55)  
4. S-10 4-DOOR BLAZER 4X4 (CT10506/E55)

NOTE: Refer to Dealer Order Guide for Updated Option Availability.

OPTION	CODE	DESCRIPTION	RESTRICTIONS	MODELS			
				2-WHEEL DRIVE		4-WHEEL DRIVE	
				1	2	3	4
<b>OFF-ROAD SUSPENSION PACKAGE</b>	ZM6	Incls Gas Shocks, Lgr Torsion Bars, Jounce Bumper, Stabilizer Bar	Reqs QEB Tires; N/A F51 Shocks or F60 Suspension	—	—	O	—
<b>PAINT, EXTERIOR</b> Solid	ZY1	(See Color and Trim)		S	S	S	S
Special Two-Tone	ZY3	Incls D96 Striping; Paint Break at Upper Feature Line	N/A YC2 Tahoe	O	O	O	O
Deluxe Two-Tone	ZY4	Paint Break Between Feature Lines	Reqs YC2 Tahoe	O	O	O	O
<b>RADIO EQUIPMENT</b> Electronically-Tuned AM/FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape and Digital Clock	UM6	14 Presets, Digital Display, two 4" x 6" Front Speakers, two 6" x 9" ERS Rear Speakers, 28 Watts Total Power Output		O	O	O	O
Electronically-Tuned AM/FM Stereo Radio w/Seek-Scan and Digital Clock	UM7	14 Presets, Digital Display, two 4" x 6" Front Speakers, two 6" x 9" ERS Rear Speakers, 28 Watts Total Power Output		O	O	O	O
Electronically-Tuned AM Stereo/FM Stereo Radio w/Seek-Scan, Stereo Cassette Tape w/Search-Repeat, Graphic Equalizer and Digital Clock	UX1	14 Presets, Digital Display, two 4" x 6" Front Speakers, two 6" x 9" ERS Rear Speakers, 28 Watts Total Power Output		O	O	O	O
Radio Delete	UL5			O	O	O	O
<b>SEATING</b>			Must Order AM7 or YG4 Seat on 2-door Models and on 4-door 2-wheel drive Models				
Rear, Folding; 2-Passenger	AM7	Incls Armrests; 2-door models		O	—	O	—
Rear, Seat; 3-Passenger	AM7	4-door models	Standard on 4-wheel drive	—	O	—	S
Rear Seat Not Desired	YG4		N/A AM7 Seat	O	O	O	—
<b>SHIELD PACKAGE</b>	ZM5	Incls Shield for Fuel Tank, Transfer Case, Front Differential and Steering Linkage		—	—	O	O
<b>SHOCK ABSORBERS</b>	F51	Front and Rear, Heavy-Duty (32mm); Incl w/F60 Susp	N/A ZM6 Suspension Equipment	O	—	O	O
<b>SPORT</b>	YC3	(See Trim Levels for Details)		O	—	O	—
<b>SPEED CONTROL, ELECTRONIC</b>	K34	Includes Resume Acceleration Feature		O	O	O	O
<b>SPRINGS</b> Front, Heavy-Duty	F60	Incls F51 Shocks	N/A ZM6 Suspension Pkg	—	—	O	O
<b>STRIPING</b>		(See Color and Trim for Availability)					
	D96	Body at Belt Line	Reqs ZY1 Paint; Incl w/ZY3 Paint	O	O	O	O
<b>SUNROOF</b>	AD3	Manual, Non-Removable		O	—	O	—
<b>TAHOE</b>	YC2	(See Trim Levels for Details)		O	S	O	S
<b>TIRE EQUIPMENT</b> B/W: Blackwall W/W: Whitewall W/L: White Lettered P205/75R15 B/W	QCE	All-Season Steel-Belted Radial		S	S	S	S
P205/75R15 W/L	QCF	All-Season Steel-Belted Radial		O	O	O	O
P205/75R15 B/W	QJT	On-Off Road Steel-Belted Radial		O	O	O	O
P205/75R15 W/L	QJL	On-Off Road Steel-Belted Radial		O	O	O	O
P235/75R15 W/L	QEB	On-Off Road Steel-Belted Radial	Reqs 3.42 Rear Axle	—	—	O	O



# OPTIONS

- KEY S - Standard  
 O - Optional  
 — Not Available
1. S-10 2-DOOR BLAZER 4X2 (CS10516/E55)  
 2. S-10 4-DOOR BLAZER 4X2 (CS10506/E55)  
 3. S-10 2-DOOR BLAZER 4X4 (CT10516/E55)  
 4. S-10 4-DOOR BLAZER 4X4 (CT10506/E55)

NOTE: Refer to Dealer Order Guide for Updated Option Availability.

OPTION	CODE	DESCRIPTION	RESTRICTIONS	MODELS			
				2-WHEEL DRIVE		4-WHEEL DRIVE	
				1	2	3	
<b>TRAILERING PACKAGE</b>	Z72	Light-Duty, Incl V01 Cooling w/o V02 on KC4 Cooling; also Incl 5-Lead Wiring Harness, Heavy-Duty Flasher and VR2 Deadweight Trailer Hitch	N/A Z82 Trailering Equipment	O	O	O	O
<b>TRAILERING SPECIAL EQUIPMENT</b>	Z82	Heavy-Duty, Incl 7-Lead Wiring Harness, H.D. Flasher, Weight Distribution Platform Hitch	Reqs KC4 Engine Oil Cooler; w/MM5 Trans reqs 3.42 Rear Axle; w/MX0 Trans reqs V02 Cooling	O	O	O	O
<b>TRANSMISSIONS</b>		(See Powertrains)					
5-Speed Manual w/Overdrive	MM5			S	S	S	S
4-Speed Auto w/Overdrive	MX0			O	O	O	O
<b>WHEEL TRIM</b>	P06	Trim Rings Incl w/YC2 Tahoe	N/A YC3 Sport	O	O	O	O
<b>WHEELS</b>		(All Wheel Options Include Base Steel Spare Wheels)					
Aluminum	N60	Gray Paint (2-wheel drive)	Included w/YC3 Sport	O	O	—	—
Aluminum	N90	Cast (4-wheel drive)	Included w/YC3 Sport	—	—	O	O
Rally	ZJ7	With Trim Rings	Included w/YC2 Tahoe N/A YC3 Sport	O	O	—	—
<b>WINDOWS</b>	AD5	Sliding Side		O	—	O	—
<b>WINDOW WIPER/WASHER, REAR</b>	C25	Separate Control on Dash Avail w/AA3 Glass	N/A w/AJ1 Glass	O	O	O	O

**2 AND 4-DOOR)  
SOLID COLOR  
(ZY1)**

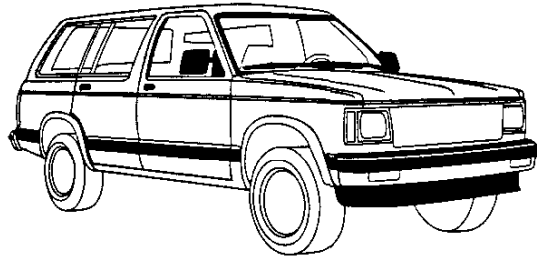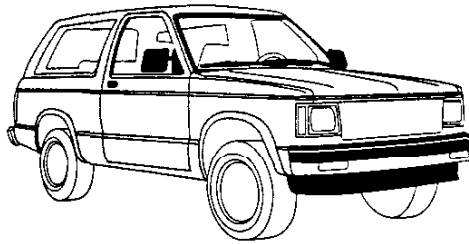



**Solid Color Paint (ZY1)** is standard with the S-10 (standard), Tahoe (YC2) or Sport (YC3) trim levels on 2-door models, and Tahoe (YC2) or Sport (YC3) trim levels on 4-door models. 4-door models with ZY1 include black body side moldings, bright wheel opening moldings with YC2 and black wheel opening moldings with YC3. All painted areas are the same color. The only available Color Code 1/Color Code 2 exterior paint combinations are those displayed in the chart below. Recommended interior colors are indicated by the symbol ●. However, any interior trim color that is not indicated as N/A may be ordered if desired by the customer. Also noted in the chart below are optional D96 striping colors. For more information, refer to Seats and Interior Trim pages as well as the Truck Order Guide.

KEY: ●—Recommended      Blank—Available but not recommended      N/A—Not Available

COLOR CODE 1	COLOR CODE 2	D96 (Optional)	Blue	Charcoal	Garnet	Saddle
12 Frost White	12 Frost White	Blue	●	N/A	N/A	N/A
	12 Frost White	Silver	N/A	●	N/A	N/A
	12 Frost White	Vermillion	N/A	N/A	●	N/A
	12 Frost White	Brown	N/A	N/A	N/A	●
19 Midnight Black	19 Midnight Black	Vermillion	N/A	N/A	●	N/A
	19 Midnight Black	Silver	N/A	●	N/A	N/A
	19 Midnight Black	Brown	N/A	N/A	N/A	●
24 Aspen Blue Metallic	24 Aspen Blue Met.	Silver	●	●		
Sky Blue	26 Sky Blue	Blue	●			
Wheat	37 Wheat	Brown				●
43 Mint Green	43 Mint Green	White		●		
47 Royal Blue Metallic	47 Royal Blue Met.	Blue	●	N/A	N/A	N/A
	47 Royal Blue Met.	Silver	N/A	●	N/A	N/A
48 Garnet	48 Garnet	Silver	N/A	●	N/A	N/A
	48 Garnet	Brown	N/A	N/A	●	●
72 Apple Red	72 Apple Red	Silver	N/A	●	N/A	N/A
	72 Apple Red	Vermillion	N/A	N/A	●	N/A
90 Steel Gray Met.	90 Steel Gray Met.	Vermillion	N/A	N/A	●	N/A
	90 Steel Gray Met.	Silver	N/A	●	N/A	N/A

# SPECIAL TWO-TONE (2 AND 4-DOOR) (ZY3)

Special two-tone (ZY3) paint is available with S-10 (Standard), or Sport (YC3) trim levels on 2-door models, and Sport (YC3) trim levels on 4-door models. Decal stripping (D96) is also included. Color Code 1 is applied to the areas above the stripe, and Color Code 2 is applied to the areas below the stripe. The only available Color Code 1/Color Code 2 exterior paint combinations are those displayed in the chart below. Recommended interior trim colors are indicated by the symbol ●. For more information, refer to Seats and Interior Trim pages as well as the Truck Order Guide.

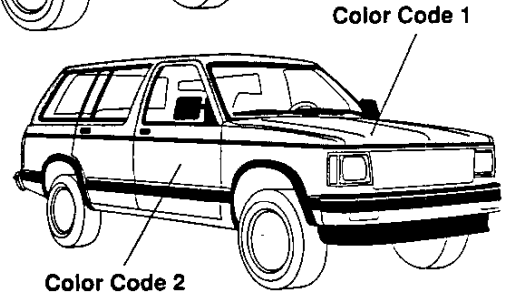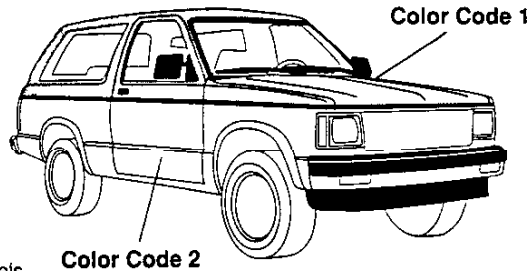


KEY: ● — Recommended      Blank — Available But Not Recommended      N/A — Not Available

EXTERIOR COLORS		STRIPE COLORS		INTERIOR COLORS		
COLOR CODE 1	COLOR CODE 2		Blue	Charcoal	Garnet	Saddle
12 Frost White	26 Sky Blue	White	●	N/A	N/A	N/A
	43 Mint Green	White	N/A	●	N/A	N/A
	47 Royal Blue Met.	Blue	●			
	72 Apple Red	Silver		●	●	
	90 Steel Gray Met.	White		●	N/A	
19 Midnight Black	90 Steel Gray Met.	Vermillion	N/A	N/A	●	N/A
	17 Silver Metallic	Vermillion	N/A <sup>1</sup>	●	●	N/A <sup>1</sup>
	43 Mint Green	White		●		
	72 Apple Red	Vermillion	N/A	●	N/A	N/A
	72 Apple Red	Silver	N/A	●	N/A	N/A
24 Aspen Blue Metallic	90 Steel Gray Met.	Silver		●	N/A	
	90 Steel Gray Met.	Vermillion	N/A	N/A	●	N/A
26 Sky Blue	17 Silver Metallic	Blue	●	●		
	47 Royal Blue Met.	Blue	●			
37 Wheat	12 Frost White	Brown				●
43 Mint Green	12 Frost White	Green		●		
	19 Midnight Black	Green				●
47 Royal Blue Metallic	12 Frost White	Blue	●			
	17 Silver Metallic	Blue	●	●		
	24 Aspen Blue Met.	Blue	●			
	26 Sky Blue	Blue	●			
48 Garnet	12 Frost White	Silver	N/A	●	N/A	N/A
	17 Silver Metallic	Vermillion		●	●	
	72 Apple Red	Silver		●	●	
	72 Apple Red	Vermillion	N/A	N/A	●	N/A
	90 Steel Gray Met.	Silver	N/A	●	N/A	N/A
72 Apple Red	12 Frost White	Vermillion		●	●	
	17 Silver Met.	Vermillion		●	●	
	19 Midnight Black	Silver		●	N/A	N/A
	19 Midnight Black	Vermillion	N/A	N/A	●	
	48 Garnet	Silver	N/A	●	N/A	N/A
	48 Garnet	Vermillion	N/A	N/A	●	N/A
	90 Steel Gray Met.	Vermillion	N/A	N/A	●	
	90 Steel Gray Met.	Silver		●	N/A	N/A
90 Steel Gray Metallic	17 Silver Metallic	Vermillion	N/A <sup>1</sup>	●	●	N/A <sup>1</sup>
	19 Black Midnight	Silver	N/A	●	N/A	N/A
	19 Black Midnight	Vermillion	N/A	N/A	●	N/A

<sup>1</sup> N/A on 2-door models only.

**2 AND 4-DOOR)  
DELUXE  
TWO-TONE  
(ZY4)**

Deluxe two-tone (ZY4) paint is available with S-10 (Standard), Tahoe (YC2) or Sport (YC3) trim levels on 2-door models, and Tahoe (YC2) trim level on 4-door models. It includes black body side moldings, bright wheel opening moldings on YC2, and black wheel openings on YC3. The areas above the belt styling crease line and below the moldings are painted color code 1. The areas between the line and the molding are painted color code 2. The only available Color Code 1 Color Code 2 exterior paint combinations are those displayed in the chart below. Recommended interior trim colors are indicated by the symbol ●. For more information, refer to Seats and Interior Trim pages as well as the Truck Order Guide.

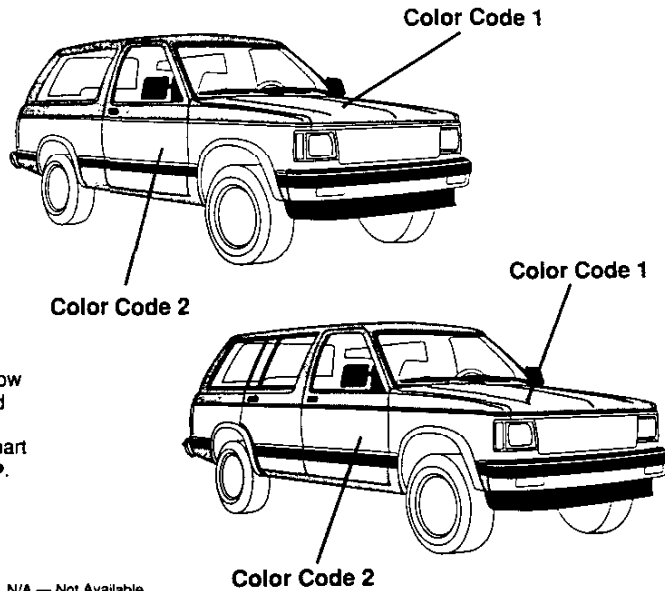

KEY: ● — Recommended      Blank — Available But Not Recommended      N/A — Not Available

EXTERIOR COLORS			STRIPE COLORS		INTERIOR COLORS		
COLOR CODE 1	COLOR CODE 2		Blue	Charcoal	Garnet	Saddle	
12 Frost White	26 Sky Blue	N/A	●				
	43 Mint Green	N/A		●			
	47 Royal Blue Met.	N/A	●		●		
	72 Apple Red	N/A		●	●		
	90 Steel Gray Met.	N/A		●	●		
19 Midnight Black	17 Silver Met.	N/A		●	●		
	43 Mint Green	N/A		●			
	72 Apple Red	N/A			●		
	90 Steel Gray Met.	N/A		●	●		
24 Aspen Blue Metallic	17 Silver Met.	N/A	●	●			
	47 Royal Blue	N/A	●				
26 Sky Blue	12 Frost White	N/A	●				
	47 Royal Blue Met.	N/A	●				
37 Wheat	12 Frost White	N/A				●	
43 Mint Green	12 Frost White	N/A		●			
	19 Midnight Black	N/A				●	
47 Royal Blue Metallic	12 Frost White	N/A	●				
	17 Silver Met.	N/A	●	●			
	24 Aspen Blue Met.	N/A	●				
	26 Sky Blue	N/A	●				
48 Garnet	12 Frost White	N/A		●	●		
	17 Silver Met.	N/A		●	●		
	72 Apple Red	N/A		●	●		
	90 Steel Gray Met.	N/A		●	●		
72 Apple Red	12 Frost White	N/A		●	●		
	17 Silver Met.	N/A		●	●		
	19 Midnight Black	N/A		●	●		
	48 Garnet	N/A		●	●		
90 Steel Gray Metallic	17 Silver Met.	N/A		●	●		
	19 Black Midnight	N/A		●	●		

**SPECIAL TRAILERING PACKAGES**

If you intend to tow a light trailer (up to 2000 lbs. gross weight) with your new S-10 Blazer, an optional Special Trailing Package (RPO Z72) is highly recommended. RPO Z72 includes a deadweight hitch which is bolted to the rear bumper and undercarriage and includes a 1 7/8"-diameter hitch ball. This package also includes a light-duty 5-wire wiring harness. This allows the electrical system to activate trailer lights and other electrical systems.

If you intend to tow a medium or heavy weight trailer (2000 to 4000 lbs. or 6000 lbs. gross weight), heavy-duty Special Trailing Package (RPO Z82) is a required option. This option is also required, regardless of gross trailer weight, if your trailer tongue weight exceeds 200 lbs. RPO Z82 includes a weight-distributing hitch platform which is bolted to the frame and a heavy-duty 7-wire wiring harness without connector. With either trailing package, the wiring harness comes coiled and taped. The wiring harness will be located inside the body at the spare tire location. Both the 5-wire and 7-wire wiring harness include heavy-duty flasher.



See the chart below for trailering options in addition to Special Trailing Packages.

The chart below indicates, in **bold type**, the trailering equipment required for an S-10 Blazer for light, medium and heavy trailer towing. Additional recommended options are also indicated. To help you in ordering, each column lists Regular Production Option (RPO) numbers.

*Note that, although S-10 Blazer 2- and 4-door models can be purchased with manual transmissions Chevrolet strongly endorses the 4-speed automatic transmission for towing.*

*Therefore, the chart below is for S-10 Blazer models with automatic transmissions only. Other important trailering information is available in the Owner's Manual of every 1991 S-10 Blazer Sport Utility.*

NOTE: Chart entries in Bold are required options.

REQUIRED/RECOMMENDED TRAILERING EQUIPMENT						
Trailer Classification	Light		Medium		Heavy	
Maximum Gross Trailer Weight (lbs.) <sup>1</sup>	2000		4000		6000	5500 <sup>3</sup>
Maximum Tongue Load (lbs.)	200		500		750	700
<b>Series</b>	<b>2WD</b>	<b>4WD</b>	<b>2WD</b>	<b>4WD</b>	<b>2WD</b>	<b>4WD<sup>3</sup></b>
Special Trailing Package	<b>Z72</b>	<b>Z72</b>	<b>Z82</b>	<b>Z82</b>	<b>Z82</b>	<b>Z82</b>
5-Wire Wiring Harness (incl. in RPO Z72)	X	X	—	—	—	—
7-Wire Wiring Harness (incl. in RPO Z82)	—	—	X	X	X	X
Deadweight Hitch (incl. in RPO Z72) <sup>2</sup>	X	X	—	—	—	—
Weight Distributing Hitch Platform <sup>2</sup> (incl. in RPO Z82)	—	—	X	X	X	X
<b>Minimum Engine</b>						
4.3L (262 Cu. In.) V6 w/EFI (Std.)	<b>LB4</b>	<b>LB4</b>	<b>LB4</b>	<b>LB4</b>	<b>LB4</b>	<b>LB4</b>
4-SPD. Automatic Transmission w/Overdrive	<b>MX0</b>	<b>MX0</b>	<b>MX0</b>	<b>MX0</b>	<b>MX0</b>	<b>MX0</b>
Minimum Axle Ratio (to 1)	<b>3.08</b>	<b>3.08</b>	<b>3.08</b>	<b>3.08</b>	3.08 (5000)	3.08 (4500)
	—	—	—	—	3.42 (6000)	3.42 (5500)
Engine Oil Cooler	—	—	<b>KC4</b>	<b>KC4</b>	<b>KC4</b>	<b>KC4</b>
Transmission Oil Cooler	—	—	<b>V02</b>	<b>V02</b>	<b>V02</b>	<b>V02</b>
Heavy-Duty Radiator	<b>V01</b>	<b>V01</b>	—	—	—	—
Heavy-Duty Shock Absorbers, Front and Rear	—	—	<b>F51</b>	<b>F51</b>	<b>F51</b>	<b>F51</b>
Electronic Speed Control	<b>K34</b>	<b>K34</b>	<b>K34</b>	<b>K34</b>	<b>K34</b>	<b>K34</b>

<sup>1</sup> If you order more than the minimum required equipment or carry more than two passengers, the additional weight must be subtracted from the maximum trailer weight.

<sup>2</sup> Interference may occur if S-10 Blazer is also equipped with RPO P16 Outside Spare Tire carrier and if trailer is equipped with winch or tongue jack.

<sup>3</sup> The GCWR is reduced by 1000 lbs. with an Automatic Transmission and 5000 lbs. with a manual transmission when P235/75R15 tires are specified.

**HOW TO USE GCWRs TO  
DETERMINE POWERTRAIN  
AND REAR AXLE RATIO  
TRAILERING**

Use Gross Combination Weight Ratings (GCWRs) to determine the engine, transmission and rear axle ratio you will require to tow a trailer with your truck. The chart below shows you the maximum allowable GCWR based on all the available truck engines and rear axle

ratios with automatic or manual transmissions. **The GCWR includes the total loaded weight of both the truck and trailer.** Any available engine may be used for trailering if the GCWR shown is not exceeded. The trailer weight can be increased by 25% if the vehicle speed will not exceed 25 mph.

**GROSS COMBINATION WEIGHT RATING (GCWR)**

With Automatic Transmission																				
GCWR (lb.) <sup>1</sup>	6000	6500	7000	7500	8000	8500	9000	9500	10,000	10,500	11,000	11,500	12,000	12,500	13,500	14,000	14,500	15,000	16,000	19,000
Engines																				
Rear Axle Ratios																				
4.3L (262) V6 Gas						3.08		3.42												
With Manual Transmission																				
GCWR (lb.)				4500	5000	5500	6000	7500	8000	8500	9000	9500	10,000	11,000	12,000	13,500	14,500	15,000	16,000	19,000
Engines																				
Rear Axle Ratios																				
4.3 (262) V6 Gas								3.08	3.42											

<sup>1</sup>The GCWR is reduced by 1000 lbs. with an Automatic Transmission and 5000 lbs. with a manual transmission when P235/75R15 tires are specified.  
When towing a trailer in excess of 3000 lbs. with a truck equipped with a 4-speed automatic transmission, it is recommended to shift to third gear range ("D") instead of overdrive ("O") for normal towing, and to manually downshift as required on uphill and downhill grades.  
Note: Model and driveline combinations must be verified by your local dealer for correct emissions equipment.

**GENERAL TRAILERING INFORMATION**

Chevrolet Truck offers a wide selection of available options for trailering and a few of them are described here.

**LIGHT-DUTY TRAILER HITCH**

For hauling trailers up to 2000 lbs. with a maximum tongue load of 200 lbs. A 1 7/8" diameter ball is included in RPO Z72 or dealer-installed accessory. (See chart for part numbers.)

**HITCH BALLS**

1 7/8"-diameter ball is standard with light-duty hitches. It is also available as an accessory: Part No. 981148. A 2"-diameter ball is also available for hitches as Part No. 980670.

**LOAD-DISTRIBUTING PLATFORM**

Required when towing trailers over 2000 lbs. or 200 lbs. tongue load. Included in RPO Z82 or as a dealer-installed accessory. Installs quickly and easily. (See chart for part numbers.)

**WIRING HARNESSES**

5-wire used with trailers under 2000 lbs. gross weight and 7-wire for larger trailers. Harnesses tie into vehicle's electrical system to activate your trailer lights, plus (7 wire harness) electric brakes or battery charging.

**TRUCK WIRING CODE**

The following color code for trucks should be used when installing trailer wiring harnesses.

- **Blue.** Used for electric trailer brakes or auxiliary wiring.
- **Red.** Used for battery charging. Connects to starter solenoid. (7-wire harness only).
- **Light Green.** Backup lights (7-wire harness only).
- **Brown.** Taillight and running lights.
- **Yellow.** Left stop and turn signal.
- **Dark Green.** Right stop and turn signal.
- **White.** Ground.

**MIRRORS**

Trucks used as tow vehicles will require outside mirrors with extensions that exceed the width of the trailer to be towed. Optional mirrors with larger mounting brackets are available with all truck models.

**COOLERS AND COOLING**

Trailering creates higher-than-normal temperatures in coolant, engine and transmission oil. To help control these temperatures, consider the following separate options.

**RPO V02.** This is an extra-capacity heavy-duty automatic transmission oil cooler option. (Included in RPO Z82 Special Trailering Package.)

**RPO KC4.** This optional engine oil cooler circulates oil through a separate cooler mounted ahead of the radiator. (Included in RPO Z82 Trailering Package.) Also required for manual transmission towing over 2000 lbs. trailer weight.

**DEALER-INSTALLED TRAILER HITCHES**

	Light Up to 2000-Lbs. 200-Lb. Tongue Load	Light/Medium Up to 4000-Lbs. 400-Lb. Tongue Load	Heavy Up to 5000-Lbs. 600-Lb. Tongue Load	Heavy Up to 7000-Lbs. 850-Lb. Tongue Load
Type of Hitch	Deadweight <sup>1</sup>	Rear Step Bumper	Weight-Distrib. Platform	Weight-Distrib. Platform
S-10 Blazer	998954	—	998484	—

<sup>1</sup>Deadweight hitch includes 1 7/8 ball.