


1984

### **MOTOR HOME CHASSIS**

### MOTOR HOME CHASSIS MODEL SELECTOR

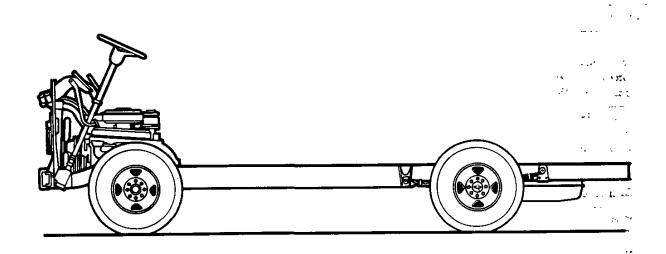

SERIES		MODEL	NUMBER		BODY ORDEI	RING CODE
J. C.	125" WB	137" WB	158.5" WB	178" WB	GASOLINE MODELS	DIESEL MODELS
P30/3500	P30832	P31132	P31432	*P31832	ZW9	ZW9/B3J

<sup>\*178&</sup>quot; WB P31832 model not available with diesel engine.

AND THE POST OF THE PARTY OF TH

GASOLINE

### **MOTOR HOME CHASSIS**

### **STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Model	P30832, P31132, P31432	P31832			
Engine Air Filter Oil Filter Oil Cooler Exhaust System Emission Control Systems	Polyurethane-wrapped Oiled-paper Throwaway Type Standard				
Suspension, Front Type Capacity Springs @ Ground Shock Absorbers Stabilizer Bar	Indeper Coil Springs with Au 4300 lb. 2500 lb 35mm	ndent exiliary Air Springs 5000 lb. o. ea. dia.			
Suspension, Rear Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers Stabilizer Bar	7900 lb. 4.10 3100 lb. ea. 32mm dia.	Two-stage Multi-leaf Springs 10,000 lb. 4.56 5000 lb. ea. 35mm dia. 1.75" dia.			
Brakes Front Rear Booster Parking	Disc; 12.5" Rotor Drum; 13" x 3.5" Disc; 14.25" Rotor Disc; 13.75" Rotor Hydraulic Power Hydraulic Power				
Electrical Battery — Freedom Type — Reserve Capacity Delcotron Generator		• @ 0°F. @ 80°F.			
Frame Section Modulus	Carbon Steel; 3 125", 137" WB-5.26 158.5" WB-6.12	36,-39,000 psi 6.12			
Fuel Tank (nominal capacity) Permanent Temporary					
Steering Gear Type Steering Wheel	Integral Comfo				
Transmission Shift Location Oil Cooler	3-Speed A Steering ( Standard; Integra	Column			
Tires Front Rear	1 (-) ( ()				
Wheels	(6) 16" x 6"	(6) 19.5" x 6.0"			

<sup>♦</sup>CCA-Cold Cranking Amps

### DIESEL

### STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Model▲	P30832, P31132, P31432
Engine Air Filter Oil Filter Oil Cooler Exhaust System	6.2 Liter 379 Cu. In. V8 Diesel Poly-wrapped Oiled-paper Element Throwaway Type Standard Dual; Aluminized
uspension, Front Type Capacity Springs @ Ground Shock Absorbers Stabilizer Bar uspension, Rear Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers Stabilizer Bar	See Engine & Cooling Section for specific model application
Capacity Springs @ Ground Shock Absorbers	Independent Coil Springs with Auxiliary Air Springs 4300 lb. 2500 lb. ea. 35mm dia. 1.25" dia.
Axle Ratio Springs @ Ground Shock Absorbers	7900 lb. 4.10 3100 lb. ea.
Brakes Front Rear Booster Parking	Disc; 12.5" Rotor Drum; 13" x 3.5" Hydraulic Power
Electrical Battery – Freedom Type - Reserve Capacity Delcotron Generator Engine Block Heater	115 min. ea. @ 80°F. 66 amp.
Frame Section Modulus	1000 1000 1000
Fuel Tank (nominal capacity) Permanent Temporary	. 40 gal. 5 qt.
Steering Gear Type Steering Wheel	
Transmission Shift Location Oil Cooler	Steering Column
Tires Front Rear	(2) LT215/85R16D (8PR)
	(6) 16" x 6"


▲Note: Model P31832 not available with diesel engine

♦CCA-Cold Cranking Amps

GASOLINE

### **MOTOR HOME CHASSIS**

Body Ordering Code—ZW9

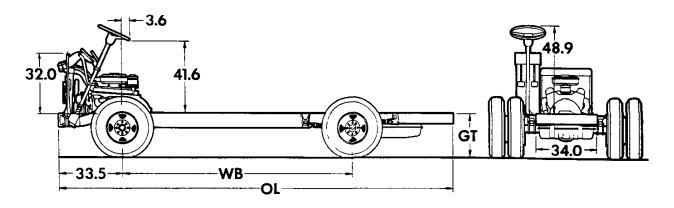


Model	Engine	Body	Dimensions (in)★			Curb Weights (lb)†		Gro Clearan	und ce (in)★	
	No. Cyl.	Length (ft)	WB	OL	GT	Front	Rear	Total	Front	Rear
P30832	8	18-20	125	206.3	27.9	2278	1623	3901	9.2	8
P31132	8	21-23	137	234.3	27.9	2284	1659	3943	9.2	8
P31432	8	24-26	158.5	259.4	27.9	2352	1745	4097	9.2	8
P31832	8	26-28	178	317.3	30.6	2442	2090	4532	10.2	8.9

<sup>★</sup>Dimensions with standard equipment, unloaded.

 $<sup>\</sup>pm$ Total Curb Weight may vary as much as  $\pm$ 50 lbs. to allow for production build variation.

DIESEL

Body Ordering Code — ZW9/B3J

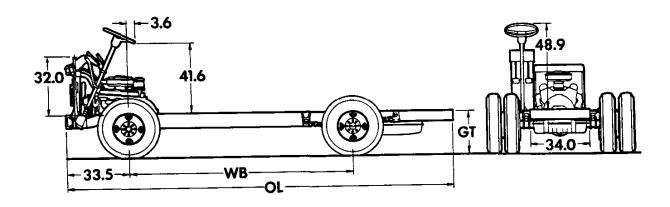

	Engine	Body	Dime	ensions (	in)★	Curb	Weights	( <b>Ib</b> )†	Gro Clearan	und ce (in)★
Model	No. Cyl.	Length (ft)	WB	OL	GT	Front	Rear	Total	Front	Rear
P30832	8	18-20	125	206.3	27.9	2324	1679	4003	9.2	8
P31132	8	21-23	137	234.3	27.9	2327	1713	4040	9.2	8
P31432	8	24-26	158.5	259.4	27.9	2393	1803	4196	9.2	8

 $<sup>\</sup>bigstar \mbox{Dimensions}$  with standard equipment, unloaded.

 $<sup>\</sup>pm$ Total Curb Weight may vary as much as  $\pm$ 50 lbs. to allow for production build variation.

### **POWER TEAMS ALL STATES**

#### POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

W/NA5 STANDARD (Satisfies High Altitude Emission Requirements) W/NA6 HIGH ALTITUDE OR YF5 CALIFORNIA EMISSIONS

ENGINE	TRANSMISSION		AX	LES		GVWR
	AUTO	*4.10	4.56	4.88	5.13	
P30832-31132-31432	W/O 7.50-16/D (PE) Tires					
#LE8 V8 7.4 Liter	MX1	*GQ1	_		_	10500
(454-4BBL)	MX1	*GQ1		_	T - T	11800
	MX1	_	*HF7	*HF8	_	%14500
LL4 Diesel	MX1	*GQ1			_	10500
6.2 Liter V8 (379 Cu. In.)(Regs B3J)	MX1	*GQ1	_	<u> </u>	- 1	11800
(or o da. m.j(neds bob)	MX1		_	_	*HC7	%14500
P30832-31132-31432	W/7.50-16/D (PE) Tires					
#LE8 V8 7.4 Liter	MX1	*GQ1	HC4	_	- 1	10500
(454-4BBL)	MX1	*GQ1	HC4	_	_	11000
	MX1	*GQ1	HC4	_		11800
	MX1	*GQ1	HC4	_	1 – 1	12300
LL4 Diesei	MX1	-	GQ1	_		10500
6.2 Liter V8 (379 Cu.in.)(Regs B3J)	MX1	_	GQ1	_	- I	11000
(or o osimi, (rieda pos)	MX1		GQ1	_	_	11800
	MX1		GQ1	_	<b>—</b>	12300
P31832		· · · · · ·				-
#LE8 V8 7.4 Liter (454-46BL)	MX1	-	GQ1	HF8	- [	14500

<sup>\*</sup>N/A G80 Locking Differential

### **ENGINE RATINGS**

### **ALL STATES EXCEPT CALIFORNIA**

SAE Net Ratings	7.4 Liter 454 4-bbl V8	6.2 Liter 379 V8 Diesel
Net Horsepower Net Torque, lb-ft	230 @ 3800 rpm 360 @ 2800 rpm	135 @ 3600 rpm 240 @ 2000 rpm

### **CALIFORNIA ONLY**

SAE Net Ratings	7.4 Liter 454 4-bbl V8	6.2 Liter 379 V8 Diesel
Net Horsepower Net Torque, lb-ft	230 @ 3800 rpm 360 @ 2800 rpm	135 @ 3600 rpm 240 @ 2000 rpm

<sup>%</sup>CP31432 only #N/A NA6 High Altitude Emissions. With NA5 Emissions Satisfies High Altitude Requirements

<sup>■</sup> High Altitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES AT HIGH ALTITUDE; NOT REQUIRED TO SATISFY HIGH ALTITUDE EMISSION REGULATIONS).

### **GVWR SELECTOR—ALL STATES**

			Minimur	n Equipment Re	quired for GVW Rating
GVW Rating	+GAW1	R (lbs)	Tire Capac	ity (lbs ea)	
(lbs)	Front	Rear	Front	Rear	Chassis Equipment
		125, 132	7, 158.5" WB Mode	is	
10,500	4300	6200	2315	1764	Standard
11,000	4880	6200	2440	2140	HD Front Suspension (F66
11,800	4300	7500	2315	2105	HD Rear Springs (G50)
12,300	4880	7500	2440	2140	HD Front Suspension (F66 HD Rear Springs (G50)
●14,500	5000	9840	2800	2460	10,000-jb Rear Axle (HC7/HF7/HF8)
		1	78" WB Model		
14,500	5000	9840	2800	2460	Standard

<sup>†</sup>GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

### FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES

### Spare tire to match either front or rear tires available at extra cost

	Capacity	(lbs each)	Hig	Highway		
Description	Front	Dual Rear	Front	Dual Rear	Spare	
	125, 1	37, 158.5" WB Mo	dels			
TUBELESS	· · · · · · · · · · · · · · · · · · ·		- <u>-</u> -			
LT215/85R16D Steel Belted Radial	2315	2105	XYK	YYK	ZYK	
LT215/85R16C Steel Belted Radial		1764		YYJ	ZYK	
	15	7.5, 178" WB Mode	ls			
TUBELESS						
<b>*8-19.5D</b> Polyester	2800	2460	XSN	YSN	ZSN	
	125,	137," 158.5" WB Mo	dels			
TUBE-TYPE						
7.50-16D Polyester	2440	2140	XPE	YPE	ZPE	

<sup>\*</sup>Requires 10,000 lb. rear axie (HC7, HF7 or HF8) on 158.5" WB model.

<sup>•</sup>Available on 158.5" WB model only.

### THE FOLLOWING EQUIPMENT IS STANDARD ON DIESEL ENGINE MODELS (ALSO SEE STANDARD SPECIFICATIONS PAGES)

- Low Coolant Sensor
- Poly-wrapped Paper Element Air Cleaner
- Power Steering
- Engine Block Heater
- Water/fuel separator unit which incorporates a water sensor and sending unit, a fuel filter, a fuel heater and water drain capability
- Dual 550 Cold Cranking Amp/115 min. Reserve Capacity Batteries
- HD Radiator
- Dual Exhaust System
- Warning Lights: Glow Plugs, Water-in-fuel (or fuel filter), and Low Coolant
- Diesel Engine Identification:
  - -Nameplates
  - -"Diesel Fuel Only" filler cap and label

### MOTOR HOME CHASSIS (10,500-lb - 14,500-lb GVW)

### 1984 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with vehicles produced on and after February 13, 1984

	Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price+	Group Number
_	8 Cylinder 7.4	Liter (454 Cı	u. ln.) 4 E	BBL V8 Ga	soline Engine-Engine Ord	lering Co	de LE8	
•	Motor Home Chassis		ZW9	125*	.40	8889.00	8889.40	14
	Motor Home Chassis		ZW9	137"	.40	8973.00	8973.40	14
	Motor Home Chassis		ZW9	158.5*	.40	9119.00	9119.40	14
	Motor Home Chassis		ZW9	178"	6.54	10399.00	10405.54	14
_	8-Cylinder 6.2				8 Engine-Engine Orderin	g Code l	.L4	
•	Motor Home Chassis		ZW9 & B3		.40	10620.00	10620.40	14
	Motor Home Chassis		ZW9 & B3	J 137"	.40	10703.00	10703.40	14
	Motor Home Chassis				.40	10848.00	10848.40	14

<sup>★</sup> Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or accessories or special items or services.

Refer to Dealer Order Guide for California Requirements.

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option Number		List Price	Mfr's Suggested Retail Price♦
Emission Systems: Dealer Note - One of the following				
emission options must be specified.  California Emission Requirements: Includes all testing, equipment and/or certification necessary for registration in the State of California. See Power Teams Chart for				
availability and complete specifications.	YF5	N.A.	235.00	235.00
Without B3J Diesel Equipment	YF5	N.A.	235.00	235.00
Diesel Equipment is specified. Not available when YFS California Emission Requirements or NA5 Standard				
Emission Equipment is specified	NA6	NO ADDITIONAL		
California or NA6 High Altitude Emissions is specified Engines: (See Power Teams Chart for availability and	NA5	NO ADDITIONAL	CHARGE	•
Complete specifications) Gasoline.				
7.4 Liter (454 Cu. In.) 4 8BL V8	LE8	NO ADDITIONAL	CHARGI	Ŧ
6.2 Liter (379 Cu. In.) H.D. V8 Diesel. Available only when B3J Diesel Equipment is specified. Not available on		NO ADDITIONAL	CHARG	<del>-</del>
P31832	LL4			_
Transmission: 3-Speed Automatic	MX1	NO ADDITIONAL	CHAHG	<b>E</b>
Axles, Rear: (See Power Teams Chart for option number				
selection, availability and complete specifications)		N.A.	36.00	36.00
Optional Ratio.  Capacity 10,000-lb. Heavy Duty. P31432 available only when SN 8-19.5 Tires are specified. Not available on P30832 or P31132. Includes H.D. power 4-wheel disc brakes. 5000-lb capacity Positrim front suspension, 10,000-lb capacity rear springs and propeller shaft mounted parking brake.  4.56 Ratio. Standard on 178" wheelbase. Not available	'			
when B3J Diesel Equipment is specified	HF7	N.A.	1502.00	1502.00
specified. 158.5" wheelbase only	HF8	N.A.	1502.00	1502.00
178" wheelbase only 178" wheelbase only 5.13 Ratio. P31432 only. Available only when B3J Dieset	HF8	N.A.	36.00	36.00
Equipment is specified	HC7	14.5 11	1502.00	1502.00
Locking Differential. Not available on 178" wheelbase	G80	N.A.	230.00	230.00

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggester Retali Price♦
<del></del>				
Tires:				
TUBELESS P30832, P31132 or P31432 only.				
All rim sizes are 6.00°				
LT215/85R16-C Steel Belted Highway Radial Blackwall				
(Maximum Capacity Each, Dual Rear 1764-lbs)				
Rear. (Standard)	YYJ	NO ADDITIONA	AL CHARGE	:
LT215/85R16-D Steel Belted Highway Radial Blackwall (Maximum Capacity Each, Front 2315-lbs) (Dual Rear				
2105-lbs)				
Front. (Standard)	XYK	NO ADDITIONA	V CUARCE	
Rear	YYK	.20	64.00	64.20
Spare	ZYK	.10	310.00	310.10
TUBELESS. P31432 or P31832 only. All 8-19.5 tires on				
P31432 available only when HC7, HF7 or HF8 10,000-lb Rear Axle is specified.				
Axia is specified. 8-19.5/D Highway Polyester Blackwall				
(Maximum Capacity Each. Front 2800-lbs) (Dual Rear				
2460-lbs)				
Front				
P31432 only	XSN	1.98	(-96.00)	(-94.02)
P31832 only. (Standard)	XSN	NO ADDITIONA		
Rear P31432 only	Vos			
P31432 only	YSN	4.16	(-128.00)	(-123.84)
Spare	YSN ZSN	NO ADDITIONA		
TUBE-TYPE. P30832, P31132 or P31432.	2314	1.09	262.00	263.09
7.50-16/D Highway Polyester Blackwall				
(Maximum Capacity Each, Front 2440-lbs) (Dual Rear				
2140-lbs)				
Front Rear	XPE	(20)	(-176.00)	(-176.20)
Spare	YPE ZPE	(20)	(-288.00)	(-288.20)
	276	N.C.	222.00	222.00
от	HER OPTIONS			
Heater, Engine Block: 600 watts, 120 volts. Not				
available when B3J Diesel Equipment is specified	K05	N.A.	31.00	31.00
Preliminiary Price Information	B3W	N.A.	N.A.	N.A.
Springs: Rear, Heavy-Duty. Capacity 3750-lb each.		11-75-	(T.A.	N.A.
Available only when YK LT215/85R16D or PE 7.50-16 Rear				
Tires are specified. Not available on 178" wheelbase or when				
HC7, HF7 or HF8 10,000-lb Rear Axle is specified	G50	N.A.	55.00	55.00
Suspension: Positrim. Front, Heavy-Duty. Available only				
when PE 7.50-16 Tires are specified. Not available on 178 wheelbase or when HC7, HF7 or HF8 10,000-lb Rear Axle is				
specified	cee			
Wheel, Spare: 19.5" x 6.00". P31432 or P31832 only.	F <b>66</b>	N.A.	478.00	478.00
Available only when SN 8-19.5/D Tires are specified	Q34	A1 A	75.00	
The state of the s	<u> </u>	N.A.	75.00	75.00
				_
· · · · · · · · · · · · · · · · · · ·				
<del> </del>		<del></del>		
				<del></del>
	<del></del>			

 <sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that
it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

Motor Home Chassis Page 10

**General Motors Corporation** 


Published: FEBRUARY, 1984

**CHASSIS FEATURES** 

### **EXTERIOR FEATURES—STANDARD MODELS**

The Standard models include the following items as standard equipment.

- Color: Chassis and components painted black
- Emblem: Bright Chevrolet/GMC letters (Furnished loose in parts box)
- Front Frame Member: Heavy channel reinforcement; painted black
- Hom: Single; low note; electric
- Instruments:
  - Gages: Speedometer, odometer, voltmeter, oil pressure, engine temperature and fuel
  - Switches: Main, for control of exterior lights and instrument lights; headlight beam (foot); ignition, direction signal with lane change position; and hazard warning
  - Warning lamps: service-parking brake, direction/hazard signal and high beam
  - NOTE: Ignition, direction signal, and hazard warning switches are installed; all other gages, switches and warning lamps are furnished loose in parts box
- Lights: (Furnished loose in parts box)
   Combination parking/direction/hazard
   Headlamps: Two; Power Beam
- Steering Wheel: Six-position Comfortilt type; 16" diameter;
   2-spoke, black soft vinyl
- Tilt Steering Column: Lever adjusting control (Six-position)
- Wheels: Painted white

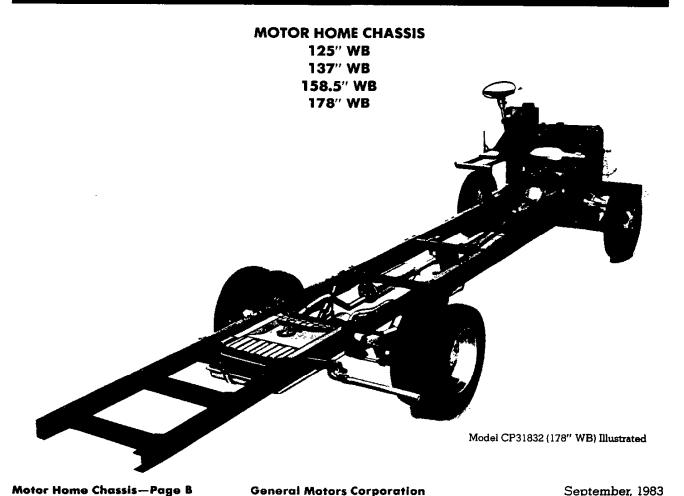


# CUTAWAY VAN RALLY CAMPER SPECIAL & VANDURA SPECIAL CUTAWAY VAN, VANDURA SPECIAL & RALLY CAMPER SPECIAL MODEL SELECTOR



	MODEL	NUMBER	BODY ORDERING CODE								
SERIES	MODEL	NUMBER	GASOLINI	E MODELS	DIESEL	MODELS					
	125" WB	146" WB	COMMERCIAL CUTAWAY VAN/ VANDURA SPECIAL	★RV CUTAWAY VAN/RALLY CAMPER SPECIAL	COMMERCIAL CUTAWAY VAN/ VANDURA SPECIAL	*RV CUTAWAY VAN/RALLY CAMPER SPECIAL					
G30/3500	G31303	G31603	ZW9	_	ZW9/B3J	_					
	G31332★	G31632*	-	ZW9	_	ZW9/B3J					
G30/3500/ C7C	_	G31603	ZW9/C7C		ZW9/B3J/C7C	_					

### HI-CUBE VAN/MAGNAVAN HI-CUBE VAN/MAGNAVAN MODEL SELECTOR

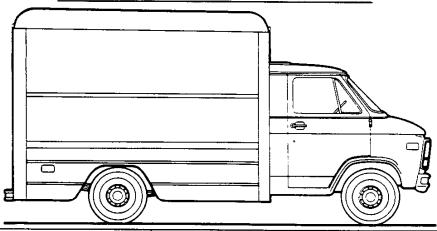

				<del></del>						
	MODEL		BODY ORDERING CODE							
SERIES	MUDEL	NUMBER	STEE	<b>L</b>	ALUM	INUM				
	125" WB	146" WB	10' BODY	12' BODY	10' BODY	12' BOD /				
			GASOLINE MODELS	5	<del>!</del>					
G30/3500	G31303	_	E31 (96" wide) E34 (82.5" wide)	_	E36	_				
	_	G31603	_	E38	_	E39				
			DIESEL MODELS	··-, ·-	<u> </u>	·				
G30/3500	G31303	_	E31/B3J (96" wide) E34/B3J (82.5" wide)		E36/B3J					
		G31603	_	E38/B3J	_	E39/B3J				

# CUTAWAY VAN RALLY CAMPER SPECIAL & VANDURA SPECIAL STANDARD SPECIFICATIONS

GASOLINE

(See Gray Tab Section for Specification Details)

Model	G31303	G31332•	G31603	G31632•							
Engine Base Equip. Air Filter Oil Filter Exhaust System Emission Control Systems	See Engir	Oiled-pape Throway *Single; A	50 4-bbl. V8 er Element vay Type luminized for specific model ar	pplications							
Suspension, Front Capacity		_	; Coil Springs 0 lb.								
Springs @ Ground Shock Absorbers		1700 lb. ea. 1950 lb. ea. 25mm dia. 35mm dia.									
Stabilizer Bar		n dia.	1.06" dia.	n dia.							
Suspension, Rear	Salisbury	Axle: Hypoid Drive	; Two-stage Multi-lea	f Springs							
Axle Capacity	5700		<b>■</b> 6200 lb.	7500 lb.							
Axle Ratio	3.23	4.10	<b>4</b> .10	4.56							
Springs @ Ground	2100 lb. ea.	3000 lb. ea.	4	lb. ea.							
Shock Absorbers	25mn	n dia.									
Brakes		Disc; 12.	elf-adjusting 5'' Rotor								
Rear	Drum; 13		,	3" x 3.5"							
Booster	Dual Dia			-Boost							
Parking		Cable to R	ear Wheels								
Electrical	12 Volt; Negative Ground										
Battery —Freedom Type —Reserve Capacity Delcotron Generator	390 CCA ◆ @ 0°F. 90 min. @ 80°F. 37 amp		515 CCA • @ 0°F. 115 min.@ 80°F. 66 amp								
Frame		Integral B	ody-frame								
Fuel Tank (nominal capacity)	22 gal.	33 gal.	22 gal.	33 gal.							
Steering		Integra	l Power								
Transmission Shift Location Oil Cooler		3-Speed Automatic Steering Column Standard									
Tires	(4)8.75-16.5D(8PR) (Single	(6)8.00-16.5C(6PR) (6)8.00-16.5C(6PR) (6)8.00-16.5E(10PR) (Dual Rear) (Dual Rear)									
Wheels	(4) 16.5"	x 6.75"	(6) 16.5'	′ x 6.0″							

<sup>•</sup>RV Cutaway Van models, G31332 and G31632, are for recreational vehicle use only and are not to be used for the mounting of any type commercial body.

<sup>\*</sup>Dual tailpipe on all models.

<sup>◆</sup>CCA-Cold Cranking Amps

<sup>■7500-</sup>lb rear axle with 4.56 ratio standard on G31603 with C7C.

<sup>▲(6)8.00-16.5</sup>D(8PR) tires standard on G31603 with C7C.

### CUTAWAY VAN RALLY CAMPER SPECIAL & VANDURA SPECIAL

### STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

DIESEL

Model	G31303	G31332•	G31603	G31632•						
Engine Base Equip. Air Filter Oil Filter Oil Cooler Exhaust System Emission Control Systems	See Engii	6.2 Liter, 379 Cu. In. V8 Diesel Poly-wrapped, Oiled-paper Element Throwaway Type Standard Dual; Aluminized  See Engine & Cooling Section for specific model applications								
Suspension, Front Capacity Springs @ Ground	1700 lb. ea.	Independent; Coil Springs 3900 lb. 1700 lb. ea. 1950 lb. ea.								
Shock Absorbers		m dia.	35mm	ı dia.						
Stabilizer Bar	_	Ĭ ,	1.06" dia.							
Suspension, Rear	Salisbur	y Axle; Hypoid Drive	: Two-stage Multi-leaf	Springs						
Axle Capacity		00 lb.	<b>■</b> 6200 lb.	7500 lb.						
Axle Ratio	3.23	4.10	<b>4</b> .10	4.56						
Springs @ Ground	2100 lb. ea.	3000 lb. ea.	3600 l	3600 lb. ea.						
Shock Absorbers	. 25mm dia. 35mm dia.									
Brakes		Hydraulic; S	elf-adjusting							
Front		Disc; 12.								
<b>Rear</b>	Drum; l	3" <b>x</b> 2.5"	Drum; 13	3" x 3.5"						
Booster		Hydraul								
Parking		Cable to R	ear Wheels							
Electrical		12 Volt; Nega	tive Ground							
Battery										
-Freedom Type		Two; 550 CC.								
- Reserve Capacity Delcotron Generator			ea. @ 80°F. imp.							
Engine Block Heater			nnp. , 120 volts							
Frame		Integral B	ody-frame	·						
Fuel Tank (nominal capacity)	22 gal.	33 gal.	22 gal.	33 gal.						
Steering		Integra	l Power							
Transmission	3-Speed Automatic Steering Column Standard									
Shift Location Oil Cooler										
Oil Cooler			ndard	(6) 8.00-16.5D (8PR (Dual Rear)						

<sup>•</sup>RV Cutaway Van models, G31332 and G31632, are for recreational vehicle use only and are not to be used for the mounting of any type commercial body.

<sup>◆</sup>CCA-Cold Cranking Amps

<sup>■7500-</sup>lb rear axle with 4.56 ratio standard on G31603 with C7C.

<sup>▲(6)8.00-16.5</sup>D(8PR) tires standard on G31603 with C7C.

GASOLINE

### **HI-CUBE VAN/MAGNAVAN**

### **STANDARD SPECIFICATIONS**

(See Gray Tab Section for Specification Details)

Model	G3	1303	G31603				
Body Ordering Code	E34-10' Steel	E31-10' Steel E36-10' Aluminum	E38-12' Steel	E39-12' Aluminur			
Engine Base Equip. Air Filter Oil Filter Exhaust System Emission Control System	See Eng	5.7 Liter, 350 Oiled-pape Throwaw *Single; Al ine & Cooling Section i	r Element ay Type uminized	applications			
Suspension, Front Capacity Springs @ Ground Shock Absorbers Stabilizer Bar	1700	Independent; 3900 Ib. ea. am dia.	Coil Springs lb.	0 lb. ea. nm dia.			
Suspension, Rear Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers	5700 lb. 3.23 2100 lb. ea.	y Axle; Hypoid Drive; 4.10 3000 lb. ea.	6200 lb. 360	eaf Springs 4.10 0 lb. ea. nm dia.			
Brakes Front Rear Booster Parking	Drum; 13" x 2.5" Dual Diaphragm	Hydraulic; Se Disc; 12.5 Cable to Re	5" Rotor Drum; 13" x 3.5" Hydro-Boost				
Electrical Battery - Freedom Type - Reserve Capacity Delcotron Generator		12 Volt; Negar					
Frame		Integral Bo					
Fuel Tank (nominal capacity)		22 g	al.				
Steering		Integral I	Power				
Transmission Shift Location Oil Cooler	3-Speed Automatic Steering Column Standard						
Tires	(4) 8.75-16.5D (8PR) (Single Rear)	(6) 8.00-16.5C (6PR) (Dual Rear)					
Wheels	(4) 16.5" x 6.75" (6) 16.5" x 6.0"						

<sup>\*</sup>Dual tailpipe on all models

<sup>◆</sup>CCA-Cold Cranking Amps

DIESEL

### STANDARD SPECIFICATIONS


(See Gray Tab Section for Specification Details)


Model	G3	1303	G31603						
Body Ordering Code	E34-10' Steel	E31-10' Steel E36-10' Aluminum	E38-12' Steel	E39-12' Aluminun					
Engine Base Equip. Air Filter Oil Filter Oil Cooler Exhaust System Emission Control System	Poly-wrapped, Oiled-paper Element Throwaway Type Standard Dual; Aluminized Control See Engine & Cooling Section for specific model app								
Suspension, Front Capacity	170	390	; Coil Springs 0 lb.	50 lb. ea.					
Springs @ Ground Shock Absorbers Stabilizer Bar		0 lb. ea. nm dia.		mm dia.					
Suspension, Rear Axle Capacity Axle Ratio Springs @ Ground Shock Absorbers	5700 lb. 3.23 2100 lb. ea.	ary Axle; Hypoid Drive 3000 lb. ea. mm dia.	e; Two-stage Multi-leaf Springs 6200 lb. 4.10 3600 lb. ea. 35mm dia.						
Brakes Front Rear Booster Parking		Disc; 12 Hydrau	Self-adjusting .5" Rotor Drum; 13" x 3.5 lic Power Rear Wheels	<i>(</i>					
Electrical Battery —Freedom Type —Reserve Capacity Delcotron Generator Engine Block Heater		Two: 550 CC 115 min. 6	A ← ea. @ 0°F. ea. @ 80°F. amp. s, 120 volts						
Frame		Integral I	Body-frame						
Fuel Tank (nominal capacity)		22	gal.						
Steering		Integr	al Power						
Transmission Shift Location Oil Cooler		3-Speed Automatic Steering Column Standard							
Tires	(4) 8.75-16.5D (8P (Single Rear)	R)	(6) 8.00-16.5C (6PR) (Dual Rear)						
Wheels		,							

<sup>◆</sup>CCA-Cold Cranking Amps

### **CUTAWAY VAN** RALLY CAMPER SPECIAL & VANDURA SPECIAL

Body Ordering Code—ZW9 GASOLINE

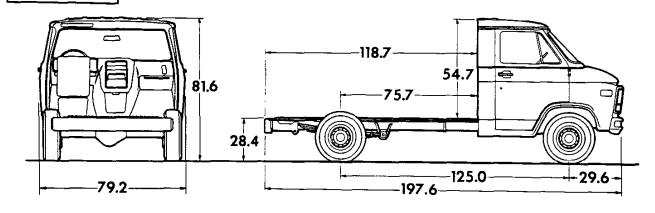

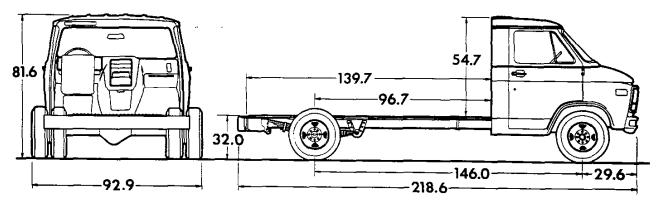


Ground Clearance (in) +- Front 9.0 in.; Rear 7.0 in.

Model	Engine	Dimensions (in)∗			Curb Weight (lb)			Model Weight (lb)*		
wodet	Engine No. Cyl.	WB	OL	ОН	Front	Rear	Total	Front	Rear	Total
G31303	. 8	125	197.6	81.6	2386	1345	3731	2497	1384	3881
•G31332		125	197.6	81.6	2402	1503	3905	2513	1542	4055
G31603		146	218.6	81.6	2582	1589	4171	2699	1622	4321
G31603 (w/C7C)	8	146	218.6	81.6	2609	1656	4265	2726	1689	4415
•G31632		146	218.6	81.6	2588	1731	4319	2705	1764	4469

★ Dimensions with standard equipment, unloaded.
 \*Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.
 ♠ RV Cutaway Van models, G31332 and G31632, are for recreational vehicle use only and are not to be used for the mounting of any type commercial body.

### **CUTAWAY VAN RALLY CAMPER SPECIAL & VANDURA SPECIAL**

Body Ordering Code—ZW9/B3J

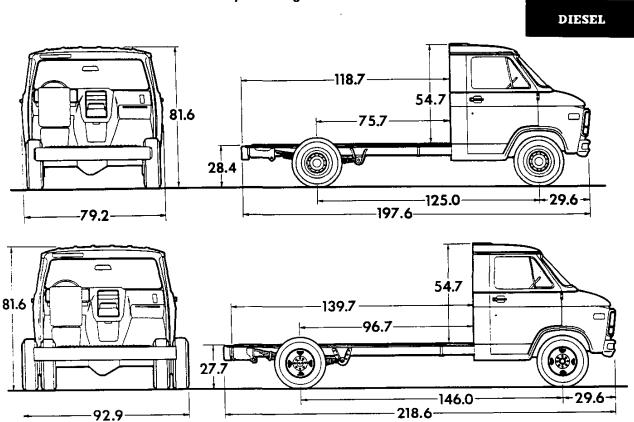

Ground Clearance (in) + - Front 9.0 in.; Rear 7.0 in.

	Fraire	Dimensions (in)∗			Curb Weight (lb)			Model Weight (lb)*		
Model	Engine No. Cyl.	WB	OL	ОН	Front	Rear	Total	Front	Rear	Total
G31303	8	125	197.6	81.6	2687	1414	4101	2798	1453	4251
•G31332		125	197.6	81.6	2690	1575	4265	2801	1614	4415
G31603		146	218.6	81.6	2879	1658	4537	2996	1691	4687
G31603 (w/C7C)	8	146	218.6	81.6	2906	1725	4631	3023	1758	4781
•G31632		146	218.6	81.6	2872	1803	4675	2989	1836	4825


 <sup>★</sup> Dimensions with standard equipment, unloaded.
 \*Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.
 ♠ RV Cutaway Van models, G31332 and G31632, are for recreational vehicle use only and are not to be used for the mounting of any

type commercial body.


#### GASOLINE

### HI-CUBE VAN/MAGNAVAN


**Body Ordering Codes:** 

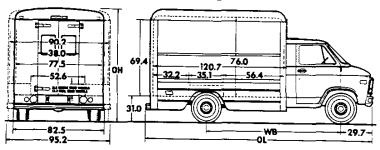

10' Steel Body—E31 (95" wide) 10' Steel Body-E34 (82.5" wide)



10' Aluminum Body—E36



12' Steel Body-E38

12' Aluminum Body—E39


See pages 10-11 for additional dimensional information

Ground Clearance (in.) \*-Front 9.0 in; Rear 7.0 in.


Model	Engine	Body Ordering	Dim	ensions	(in)*	Curb	Weigh	t (lb)	Mode	l Weigh	t (lb)*
140061	No. Cyl.	Code	WB	OL	OH	Front	Rear	Total	Front	Rear	Total
		<b>E31</b> (10' Steel)	125	211.0	109.8	2674	2749	5423	2785	2788	5573
G31303	8	<b>E34</b> (10' Steel)	125	211.0	109.8	2553	2501	5054	2664	2540	5204
		<b>E36</b> (10' Alum.)	125	214.0	109.5	2609	2339	4948	2720	2378	5098
G31603	8	<b>E38</b> (12' Steel)	146	235.0	109.8	2880	3011	5891	2997	3044	6041
	o	<b>E39</b> (12' Alum.)	146	238.0	109.5	2773	2560	5333	2890	2593	5483

 <sup>★</sup>Dimensions with standard equipment, unloaded.
 \*Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.


### **Body Ordering Codes:**



10' Steel Body—E31/B3J (95" wide) 10' Steel Body—E34/B3J (82.5" wide)

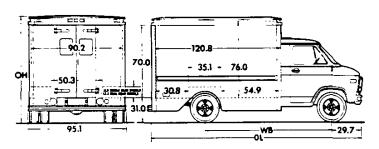

10' Aluminum Body—E36/B3J



12' Steel Body—E38/B3J

12' Aluminum Body-E39/B3J

### See pages 10-11 for additional dimensional information


DIESEL


Ground Clearance (in.) \*- Front 9.0 in; Rear 7.0 in.


	Engine	Body	Dime	Dimensions (in)★		Curb Weight (lb)			Model Weight (lb)*		
Model	No. Cyl.	Ordering Code	WB	OL	ОН	Front	Rear	Total	Front	Rear	Total
<b>G31303</b>	8	<b>E31/B3J</b> (10' Steel)	125	211.0	109.8	2999	2837	5836	3110	2876	5986
		<b>E34/B3J</b> (10' Steel)	125	211.0	109.8	2854	2570	5424	2965	2609	5574
		<b>E36/B3J</b> (10' Alum.)	125	214.0	109.5	2934	2427	5361	3045	2466	5511
601600	0	<b>E38/B3J</b> (12' Steel)	146	235.0	109.8	3177	3080	6257	3294	3113	6407
G31603	8	<b>E39/B3J</b> (12' Alum.)	146	238.0	109.5	3070	2629	5699	3187	2662	5849


 <sup>★</sup>Dimensions with standard equipment, unloaded.
 \*Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb.). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.

### STEEL BODIES DIMENSIONS

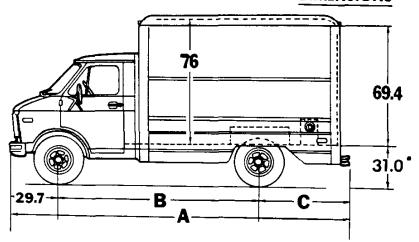



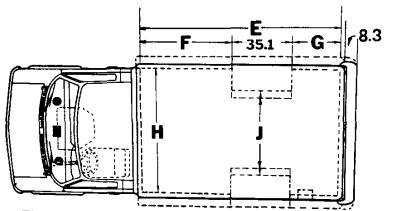






	DIMENSIONS	LOA	LD SPACE LEN	GTH				
1	With Standard Equipment, Unloaded	<b>Std. 10' (E31)</b> (96" wide)	<b>Std. 10' (E34)</b> (82.5" wide)	Std. 12' (E38) (96" wide)				
A	Overall Length (In)	211.6	211.6	235.6				
В	Wheelbase (In)	125	125	146				
С	Rear Overhang (In)	57	57	60				
D	Standard Rear Door Width (In) Optional Rear Door Width (In)	38 60, 78.7	38 60, 66, 74.1	38 60, 78.7				
E	Load Space Length (In)	120.7	120.7	144.7				
F	Front of Wheelhousing (In)	56.4	56.4	77.4				
G	Rear of Wheelhousing (In)	29.2	29.2	32.2				
Н	Load Space Width (In)	90.2	77.5	90.2				
J	Width Between Wheelhousings (In)	50.3	52.6	50.3				
K	Overall Width (In)	95.2	82.5	95.2				
	Cubic Capacity (Cu Ft)	469	406	564				
	Sign Panel Area (In x In)	54 x 118	54 x 118	54 x 142				

<sup>\*</sup>This dimension varies depending on springs, tires and wheel size.

### ALUMINUM BODIES DIMENSIONS

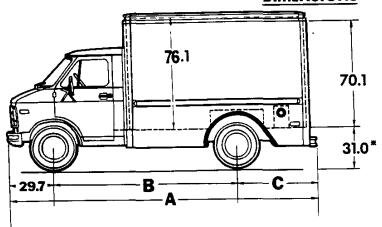



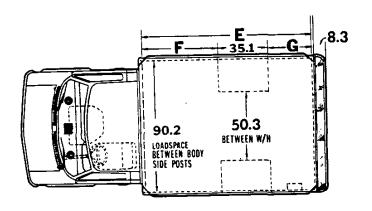



	DIMENSIONS	LOAD SPA	CE LENGTH
W	ith Standard Equipment, Unloaded	Std. 10' (E36)	Std. 12' (E39)
A	Overall Length (In)	214.5	238.5
В	Wheelbase (In)	125	146
С	Rear Overhang (In)	59.9	62.9
D	Standard Rear Door Width (In) Optional Rear Door Widths (In)	38 60, 85.7	38 60, 85.7
E	Load Space Length (In)	120.8	144.8
F	Front of Wheelhousing (In)	54.9	75.9
G	Rear of Wheelhousing (In)	30.8	33.8
	Cubic Capacity (Cu Ft)	475	570
	Sign Panel Area (In x In)	54 x 118	54 x 142

<sup>\*</sup>This dimension varies depending on springs, tires and wheel size.

### **CUTAWAY VAN & HI-CUBE VAN** RALLY CAMPER SPECIAL, VANDURA SPECIAL & MAGNAVAN **POWER TEAMS**

### **ALL STATES EXCEPT CALIFORNIA**

NA5 Standard Emission Equipment Satisfies High Altitude Emission Requirements

#### **CUTAWAY VAN**

### POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION		AXLES				
	AUTO	#3 .23	3.73	4.10	4.56	GVWR	
G31303 W/NA5 STAR	IDARD OR NA6 HIGH ALTITUI	DE EMISSION EQ	UIPMEN	ĮT	<del></del>		
8LT9 V8 5.7 Liter (350-4 BBL)	MX1	#GQ1	GT4			7400	
(350-4 BBL)	MX1		_	GQ1	HC4	8600	
	MX1			*GQ1	*HC4	8900	
	MX1			*GT8	*HF7	%10000	
ILL4 Diesel 6.2 Liter V8	MX1	#GQ1	GT4	_		7400	
(379 Cu. (n.)(Regs B3J)	MX1			GQ1	HC4	8600	
	MX1			*GQ1	*HC4	8900	
	MX1			*GT8	*HF7	%10000	
	DARD, NA6 HIGH ALTITUDE						
\$LT9 V8 5.7 Liter (350-488L)	MX1			GQ1	HC4	8900	
(330-1082)	MXT	-	-	GT8	HF7	10000	
	MX1			GT8	GQ1	10500	
LL4 Diesel	MX1	_		GQI	HC4	3900	
6.2 Liter V8 (379 Cu. In.)(Regs 83J)	MX1	_		GT8	HF7	:0000	
	MXT		_	GT8	GOI	10500	

### HI-CUBE VAN

### POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION		AXLES				
	AUTO	#3.23	3.73	4.10	4.56	GVWR	
G31303 W/NA5 STAR	DARD OR NA6 HIGH ALT	TUDE EMISSION EQ	JIPMEN	iT			
\$LT9 V8 5.7 Liter (350-48BL)	MX1	#GQ1	GT4			1 ::00	
(330-4881)	MX1			GQ1	HC4	30	
	MX1		_	*GQ1	*HC4	8900	
LL4 Diesel 6.2 Liter V8	MX1	±GQ1	GT4			7400	
(379 Cu. In.)(Regs B3J)	MX1			GQ1	HC4	8600	
	MX1			*GQ1	*HC4	8900	
G31603 W/NA5 STAN	DARD, NAS HIGH ALTITU	DE					
\$LT9 V8 5.7 Liter (350-4BBL)	MX1			GQ1	HC4	8900	
(330-488£)	MX1			GT8	HF7	10000	
LL4 Diesel 6.2 Liter V8 (Reqs B3J) (379 Cu. In.)	MX1			GQ 1.	HC4	8900	
	MX1	_		GT8	HE7	10000	

### **RV CUTAWAY VAN**

### POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION	AX	GVWR	
	AUTO	4.10	4.56	
G31332 W/NA5 STAND	ARD OR NAG HIGH ALTITUDE EN	MISSION EQUIPMEN	T	L
LT9 V8 5.7 Liter (350-488L)	MX1	GQ1	HC4	8600
<u> </u>	MX1	*GQ1	*HC4	8900
LL4 Diesei 6.2 Liter V8	MX1	GQ1	HC4	8600
(379 Cu. In.)(Reqs B3J)	MX1	*GQ1	*HC4	8900
G31632 W/NA5 STAND	ARD, NAG HIGH ALTITUDE			3900
LT9 V8 5.7 Liter (350-4BBL)	MX1	GT8	GQ1	10500
LL4 Diesel 6.2 Liter V8 (379 Cu. In.)(Regs B3J)	MX1	GT8	GQ1	10500

<sup>#</sup>N/A G50 Springs
\$N/A NA6 High Altitude Emissions. With NA5 Standard Emissions Satisfies High Altitude Requirements
\$Regs 83D School Bus Equipment
\*N/A G80 Locking Differential

Cutaway Van & Hi-Cube Van—Page 12

#Reg Manual M

### **CUTAWAY VAN & HI-CUBE VAN** RALLY CAMPER SPECIAL, VANDURA SPECIAL & MAGNAVAN **POWER TEAMS**

### CALIFORNIA ONLY

### **CUTAWAY VAN**

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

vailability) ENGINE	TRANSMISSION		AXLES				
Enoug	AUTO	#3.23	3.73	4.10	4.56		
G31303 W/YF5 CALIF	ORNIA EMISSION REQUIRE	AENTS					
LT9 V8 5.7 Liter	MX1			GQ1	HC4	8600	
(350-4BBL)	MX1			*GQ1	*HC4	8900	
,	MX1			*GT8	*HF7	%10000	
LL4 Diesel	MX1			GQ1	HC4	8600	
6.2 Liter V8	MX1			*GQ1	*HC4	8900	
(379 Cu. In.)(Regs B3J)	MX1			*GT8	*HF7	%10000	
G31603 W/YF5 CALI	FORNIA EMISSIONS			_			
SLT9 V8 5.7 Liter	MX1			GQ1	HC4	8900	
(350-488L)	MX1		_	GT8	HF7	10000	
	MX1	-	_	GT8	GQ1	10500	
LL4 Diesel 6.2 Liter V8	MX1		_	GQ1	HC4	8900	
	MX1	-	-	GT8	HF7	10000	
(379 Cu. In.)(Regs 83J)	MX1	-	_	GT8	GQ1	10500	

#### **HI-CUBE VAN**

### POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	TRANSMISSION		AXLES				
LITOITE	AUTO	#3.23	3.73	4,10	4.56		
G31303 W/YF5 CALIF	ORNIA EMISSION REQUIRE	MENTS					
SLT9 V8 5.7 Liter	MX1	_		GQ1	HC4	8600	
(350-48BL)	MX1			*GQ1	*HC4	8900	
LL4 Diesel	MX1			GQ1	HC4	8600	
6.2 Liter V8 (379 Cu. In.)(Reqs B3J)	MX1	-	_	*GQ1	*HC4	8900	
G31603 W/YF5 CALIF	ORNIA EMISSIONS						
SLT9 V8 5.7 Liter	MX1	_	_	GQ1	HC4	8900	
(350-48BL)	MX1			GT8	HF7	10000	
LL4 Diesel 6.2 Liter V8 (Reqs B3J) (379 Cu. In.)	MX1		-	GQ1	HC4	8900	
	MX1		_	GT8	HF7	10000	

### **RV CUTAWAY VAN**

### POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	Tire Chart to insure tire capacity and TRANSMISSION	AXI	GVWR	
	AUTO	4.10	4.56	
G31332 W/YF5 CALIFO	RNIA EMISSION REQUIREMENTS			
SLT9 V8 5.7 Liter	MX1	GQ1	HC4	8600
(350-48BL)	MX1	*GQ1	*HC4	8900
LL4 Diesel	MX1	GQ1	HC4	8600
6.2 Liter V8 (379 Cu. In.)(Regs B3J)	MX1	*GQ1	*HC4	8900
G31632 W/YF5 CALIFO	RNIA EMISSIONS			
SLT9 V8 5.7 Liter (350-4BBL)	MX1	GT8	GQ1	10500
LL4 Diesel 6.2 Liter V8 (379 Cu. In.)(Regs 83J)	MX1	GT8	GQ1	10500

<sup>#</sup>N/A G50 Springs

sN/A NA6 High Altitude Emissions. With NA5 Standard Emissions Satisfies High Altitude Requirements %Regs 83D School Bus Equipment

<sup>\*</sup>N/A G80 Locking Differential

### **CUTAWAY VAN & HI-CUBE VAN** RALLY CAMPER SPECIAL, VANDURA SPECIAL & MAGNAVAN **GVWR SELECTOR—ALL STATES**

REFER TO FOREWORD—GENERAL INFORMATION SECTION, PAGE 13 FOR INCOMPLETE VEHICLE CURB WEIGHT AND FRONTAL AREA DATA.

GV₩	+GAW	R (lbs)	M	inimum Equipmen	t Required for GVW Rating
Rating -				city (lbs ea)	
(lbs)	Front	Rear	Front	Rear	Chassis Equipment
	125" WHEELE	BASE COMM	ERCIAL CUT	AWAY VAN/V	ANDURA SPECIAL
<b>≡7400</b>	3400	4200	2350	2350	Standard
8600	3900	5360	2680	2680	Chassis Group (ZW1)
8900	3400	6000	1730	1520 (Duals)	Chassis Group (ZW1), Dual Rear Wheel Provisions (R05)
10,000	3900	7200	2045	1800 (Duals)	7500-lb. Rear Axle (GT8 or HF7); School Bus Chassis Equipment (B3D Dual Rear Wheel Provisions (R05)
	146" WHEELE	BASE COMM	ERCIAL CUT	AWAY VAN/V	ANDURA SPECIAL
8900	3460	6080	1730	1520 (Duals)	Standard
10,000	3900	7200	2045	1800 (Duals)	7500-lb. Rear Axle (GT8 or HF7)
10,500	3900	7200	2045	1800 (Duals)	Standard on G31603/C7C

#### WHEELBASE RV CUTAWAY VAN/RALLY CAMPER SPECIAL

8600	3900	5360	2680	2680	Standard
8900	3460	6000	1730	1520 (Duals)	Dual Rear Wheel Provisions (R05)

### • 146" WHEELBASE RV CUTAWAY VAN/RALLY CAMPER SPECIAL

10,500	3900	7200	2045	1800 (Duals)	Standard
					Standard

### 125" WHEELBASE HI-CUBE VAN/MAGNAVAN

<b>■7400</b>	3400	4200	2350	2350	
8600	3900	5360	2680	2580	Standard
8900	3400	6000	1730	1520 (Duals)	Chassis Group (ZW1), Steel (E34) Body Not available on Steel (E34) body;
					Standard on Steel E31 and Aluminum E36 bodies.

### 146" WHEELBASE HI-CUBE VAN/MAGNAVAN

8900	3460	6080	1730	1520 (Duals)	Standard
10,000	3900	7200	2045	1800 (Duals)	7500-lb. Rear Axle (GT8 or HF7)
40					1000 ib: I ical Axie (G10 (i [II])

GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined

for the mounting of any type commercial body.

AStandard and available only on model G31603/C7C.

### FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES Spare tire to match either front or rear tires available at extra cost

	Capacity (Ibs each)			Highway			
	Front/ Single Rear	Dual Rear	Front	Single Rear	Dual Rear	Single Rear	Spare
TUBELESS		<del>-</del>				<u></u>	
*8.00-16.5/C Nylon	1730	1520	XSC	<u> </u>	YSC	Γ - Τ	ZSC
*8.00-16.5/C Polyester	1730	1520	XQC		YQC	<del>  -  </del>	ZQC
*8.00-16.5/C Polyester	1730	1520	XRQ		YRQ	-	ZRQ
#8.00-16.S/D Nylon	2045	1800	XSD		YSD	<del> </del>	ZSD
*8.00-16.5/D Polyester	2045	1800	XRS		YRS		ZRS
*8.75-16.5/D Nylon	2350		XTE	YTE -	<del>_</del> _	YTF	ZTE ZTF
8.75-16.5/E Nylon	2680	-	XTH	YTH	<del></del> -	YTF -	ZTE
8.75R-16.5/E Steel Belted Radial	2680		XVD	YVD		<del>                                     </del>	ZVD

\*Not available RV Cutaway Van/Rally Camper Special.
†Available on 125" WB RV Cutaway Van/Rally Camper Special only.
\*Requires 7500-lb. rear axie (GT8 or HF7) on Commercial Cutaway Vans/Vandura Special or 146" wheelbase Hi-Cube Van/Magnavan or RV Cutaway Van/Rally Camper Special.
‡Available on 125" WB models only.

<sup>Not available in California.

RV Cutaway Van/Rally Camper Special models. G31332 and G31632, are for recreational vehicle use only and are not to be used.</sup> 

# CUTAWAY VAN & HI-CUBE VAN RALLY CAMPER SPECIAL, VANDURA SPECIAL & MAGNAVAN

### **ENGINE RATINGS—ALL MODELS**

### ALL STATES EXCEPT CALIFORNIA

SAE NET Ratings	5.7 Liter 350 4-bbl V8	6.2 Liter 379 V8 Diesel
Net Horsepower Net Torque, lb-ft		135 @ 3600 rpm 240 @ 2000 rpm

### CALIFORNIA ONLY

SAE NET Ratings	5.7 Liter 350 4-bbl V8	6.2 Liter 379 V8 Diesel
Net Horsepower Net Torque, lb-ft	155 @ 4000 240 @ 2800	135 @ 3600 rpm 240 @ 2000 rpm

# CUTAWAY VAN & HI-CUBE VAN RALLY CAMPER SPECIAL, VANDURA SPECIAL & MAGNAVAN THE FOLLOWING EQUIPMENT IS STANDARD ON DIESEL ENGINE MODELS (ALSO SEE STANDARD SPECIFICATIONS PAGES)

- Low Coolant Sensor
- Poly-wrapped Paper Element Air Cleaner
- Auxiliary Engine Oil Cooler provided for 03/32 models with air conditioning and 4.56 ratio rear axle (in addition to cooler in radiator tank)
- Power Steering
- Engine Block Heater
- Water/fuel separator unit which incorporates a water sensor and sending unit, a fuel filter, a fuel heater and water drain capability
- Hydraulic Power-assisted Brakes
- K81 66-amp Generator
- Engine Oil Cooler (located in radiator tank)
- Dual 550 Cold Cranking Amp/115 min. Reserve Capacity Batteries
- HD Radiator
- Dual Exhaust System
- Warning Lights: Glow Plugs, Water-in-fuel (or fuel filter), and Low Coolant
- Diesel Engine Identification:
  - -Fender nameplates
  - -LH rear door nameplate (Hi-Cube models only)
  - -"Diesel Fuel Only" filler cap and label

### CUTAWAY/VANDURA SPECIAL/RALLY CAMPER SPECIAL/MAGNAVAN AND HI-CUBE VAN (7400-lb - 10,500-lb GVW)

#### 1984 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with vehicles produced on and after February 13, 1984

						Mfr's Suggested	_
Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Retail Price★	Group Numbe
8-Cylinder 5.7 L	iter (350 Cu	. In.) 4 BB	L V8 Gasolir	e Engine-Engine Ord	ering Co	de LT9	
± Commercial Cutaway							
Van	CG/TG31303	ZW9	125"	N.A.	8655.00	8655.00	14
* Hi-Cube Van							
Steel (10-Ft) 82*	•						
Wide		E34	125"	N.A.	11725.00	11725.00	15
Commercial Cutaway	,						
Van	CG/TG31603	ZW9	146*	N.A.	9685.00	9685.00	14
H.D. Commercia							
Cutaway	,	ZW9 & C7C	146"	N.A.	10417.00	10417.00	14
RV Cutaway Van		zw9	125*	.16	9157.00	9157.16	14
RV Cutaway Van	CG/TG31632	ZW9	146"	N.A.	10097.00	10097.00	14
* Hi-Cube Van							
Steel (10-Ft) 96	•						
Wide		E31	125*	N.A.	12746.00	12746.00	15
Aluminum (10-Ft) .		£36	125"	N.A.	14060.00	14060.00	15
Steel (12-Ft)		E38	146"	N.A.	13004.00	13004.00	15
Aluminum (12-Ft)	CG/TG31603	E39	146"	N.A.		14430.00	15
<ul> <li>8-Cylinder 6.2 l</li> </ul>	_iter (379 Cu	ı. ln.) H.D.	Diesel V8 Er	ngine-Engine Orderin	g Code L	.L4	
				_			
Van	CG/TG31303	ZW9 & 83J	125"	N.A.	10873.00	10873.00	14
* Hi-Cube Van	,						
Steel (10-Ft) 82	•						
Wide		E34 & B3J	125"	N.A.	13913.00	13913.00	15
Commercial Cutawa	,						
Van		ZW9 & B3J	146"	N.A.	11696.00	11696.00	14
H.D. Commercia							
Cutaway	CG/TG31603	ZW9 & C7C					
		& B3J	146"	N.A.		12421.00	14
RV Cutaway Van	CG/TG31332	ZW9 & B3J	125*	.16	11267.00	11267.16	14
RV Cutaway Van	CG/TG31632	ZW9 & B3J	146"	N.A.	12104.00	12104.00	14
· Hi-Cube Van							
Steel (10-Ft) 96	3-						
Wide		E31 & B3J	125"	N.A.			15
Aluminum (10-Ft)		E36 & B3J	125"	N.A.	16028.00		15
Steel (12-Ft)	. CG/TG31603	E38 & B3J	146"	N.A.	14982.00		15
Aluminum (12-Ft)	. CG/TG31603	E39 & B3J	146"	N.A.	16394.00	16394.00	19

 <sup>★</sup> Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or accessories or special items or services.
 ◆ Refer to Dealer Order Guide for California Requirements.

Please Note: Anyone ordering a vehicle for completion or modification and use as a bus and/or school bus is solely responsible for assuring that such completed vehicle and associated equipment, which might be ordered for the vehicle, comply with all applicable Local, State, and Federal Government requirements.

 <u> </u>	

Van models will be shipped to Union City Body Co. where all body work will be done. These units will be serviced and conditioned for highway travel after body is installed.

<sup>#</sup> Factory D&H is not applicable and will not be reflected in the MSRP when B3D School Bus Chassis is specified.

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggeste Retail Price⇔
Seat Trim: Driver and Passenger. (See Interior and Exterior Color Selection Chart for Ordering Information).				
V**2 Standard Vinyl Bucket Seats		NO ADDITIONA	L CHARGE	
Without A57 Auxiliary Seat With A57 Auxiliary Seat		N.A.	21.00	21.00
X**4 Custom Vinyl High Back Bucket Seats. Without Z73 Special Interior Trim. Without A57 Auxiliary Seat	•••	N.A.	41.00	41.00
VVIIII AD / Auxiliary Seat		N.A.	30.00	30.00
with 2/3 Special Interior Trim		N.A. NO ADDITIONA	60.00	60.00
when Z73 Special Interior Trim is specified		NO ADDITIONA		
rim, Special Exterior: Includes V22 Deluxe Front pepearance, windshield moldings, headlight and front side arker lamp accents		NO ADDITIONA	L CHARGE	
Without B3J Diesel Equipment	Z80	N.A.	130.00	130.00
With B3J Diesel Equipment  Fim. Special Interior: (See Interior and Exterior Color election Chart for availability and ordering information) includes A57 Front Auxiliary Seat, stepwell mats, two-way banual adjuster. RH armrest, seat belt, D20 Passenger unshade, front door trim panels, bright accents on instrument anel, dual horns, additional front wheelhouse and instrument anel insulation. (Added weight includes passenger weight lilowance of 150-lbs per seating position on passenger seating)  Without RV Cutaway Van. Also includes U37 Cigarette	<b>Z80</b>	N.A.	90.00	130.00 90.00
Lighter	Z73	N.A.	455.00	455.00
G31332	Z73			
G31632	Z73	N.A. N.A.	426.00	426.00
aints, Exterior: (See Interior and Exterior Color Selection eart for Ordering Information and Paint Application). lid.		N.A.	412.00	412.00
Cutaway Van or Steel Hi-Cube Van only	ZY1	NO ADDITIONAL	CHARGE	
Aluminum Hi-Cube Van only	ZY 1	N.A.	230.00	230.00
ro-Tone. Aluminum Hi-Cube Van only	ZY2	NO ADDITIONAL	CHARGE	230.00
nission Systems: Dealer Note — One of the following pission options must be specified (See Power Teams Chart availability and complete specifications) lifornia Emission Requirements. Includes all testing equipment and/or certification necessary for registration in the State of California.				
Without B3J Diesel Equipment	YF5	N.A,	235.00	235.00
With B3J Diesel Equipment	YF5	N.A.	235.00	235.00
alifornia Emissions are specified.	NA6	NO ADDITIONAL	CHARGE	
Altitude or YF5 California Emissions are specified	NA5	NO ADDITIONAL	CHARGE	
gines: (See Power Teams Chart for availability and implete specifications) soline.			THE	
5.7 Liter (350 Cu. In.) 4 BBL V8	LT9	NO ADDITIONAL	CHARGE	
B3J Diesel Equipment is specified	114			
ansmission: 3-Speed Automatic.	LL4	NO ADDITIONAL	CHARGE	
	MX1	NO ADDITIONAL		

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option- Number		List Price	Mfr's Suggeste Retail Price♦
		<del></del>		
Axies, Rear: (See Power Teams Chart for option number election, availability and complete specifications)				
Optional Ratio		N.A.	36.00	36.00
G31603 or G31632 only 4.10 Ratio. Commercial Cutaway Van, Steel or Aluminum Hi-Cube Van available only when SD or RS 8.00-16.5/D Tires are specified.				
With Commercial Cutaway Van, Steel or Aluminum Hi-Cube Van	GT8	N.A.	123.00	123.00
With RV Cutaway Van or H.D. Commercial Cutaway Van/Vandura Special	GT8	N.A.	36.00	36.00
4.56 Ratio. Standard on RV Cutaway Van or H.D. Commercial Cutaway Van/Vandura Special, Commercial Cutaway Van, Steel or Aluminum Hi-Cube Van available only when SD or RS 8.00-16.5/D Tires are specified.				
G31603	HF7	N.A.	159.00	159.00
Includes heavy-duty front springs. 4.10 Ratio	GT8	N.A.	190.00	190.00
4.10 Natio 4.56 Ratio 4.66 Ratio  ocking Differential. G31303 or G31332 only. Not available	HF7	N.A.	190.00	190.00
when R05 Dual Rear Wheels, £31 or £36 Body is specified	G80	N.A.	230.00	230.00
Tires: (See Tire Charts for Tire Availability)				
All rim sizes are 6.75° without R05 Dual Rear Wheels All rim sizes are 6.00° with R05 Dual Rear Wheels <b>Dealer Note:</b> When dual rear tires are specified R05 Dual R THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND	WILL BE REFLECTED O	IN THE INVOICE SEPARATELY		
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels  Dealer Note: When dual rear tires are specified R05 Dual R THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall	WILL BE REFLECTED O	IN THE INVOICE SEPARATELY		
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Rear (Standard)	WILL BE REFLECTED O	IN THE INVOICE SEPARATELY	CHARGE	
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual R HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Rear (Standard) Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/D On-Off Road Nylon Blackwall	WILL BE REFLECTED OF THER OPTIONS' Section	IN THE INVOICE SEPARATELY 1. NO ADDITIONAL	CHARGE	
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS B.75-16.5/D Highway Nylon Blackwall Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Rear (Standard) Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. B.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only.	WILL BE REFLECTED OF HER OPTIONS' Section  XTE  YTE  ZTE	IN THE INVOICE SEPARATELY  NO ADDITIONAL NO ADDITIONAL N.C.	CHARGE CHARGE 194.00	194.00
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual R HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Rear (Standard) Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Rear Spare. Available on Hi-Cube Van only when P14 or P15	WILL BE REFLECTED OF THER OPTIONS' Section  XTE YTE  ZTE  YTF	NO ADDITIONAL NO ADDITIONAL NO ADDITIONAL NO.C.	CHARGE CHARGE 194.00 48.00	194.00 48.12
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall [Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Rear (Standard) Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Rear Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/E Highway Nylon Blackwall	WILL BE REFLECTED OF HER OPTIONS' Section  XTE  YTE  ZTE	IN THE INVOICE SEPARATELY  NO ADDITIONAL NO ADDITIONAL N.C.	CHARGE CHARGE 194.00	194.00 48.12
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Rear (Standard) Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Rear Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/E Highway Nylon Blackwall	WILL BE REFLECTED OF THER OPTIONS' Section  XTE YTE  ZTE  YTF	NO ADDITIONAL NO ADDITIONAL NO ADDITIONAL NO.C.	CHARGE CHARGE 194.00 48.00	194.00 48.12
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Rear (Standard) Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Rear Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/E Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2680-lbs) G31303 Cutaway Van, E34 Steel Hi-Cube Van or G31332 RV Cutaway Van only. Front G31303 Cutaway Van or E34 Steel Hi-Cube Van G31303 RV Cutaway Van or E34 Steel Hi-Cube Van G31303 RV Cutaway Van (Standard)	WILL BE REFLECTED OF THER OPTIONS' Section  XTE YTE  ZTE  YTF	NO ADDITIONAL NO ADDITIONAL NO ADDITIONAL NO.C.	CHARGE CHARGE 194.00 48.00 218.00	194.00 48.12 218.06
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS B.75-16.5/D Highway Nylon Blackwall Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Rear (Standard) Spare Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. B.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Rear Spare Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. B.75-16.5/E Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2680-lbs) G31303 Cutaway Van, E34 Steel Hi-Cube Van or G31332 RV Cutaway Van only. Front G31303 Cutaway Van or E34 Steel Hi-Cube Van G31332 RV Cutaway Van (Standard) Rear G31303 Cutaway Van or E34 Steel Hi-Cube Van	WILL BE REFLECTED OF HER OPTIONS' Section  XTE YTE  ZTE  YTF  ZTF  XTH  XTH  XTH  YTH	NO ADDITIONAL NO ADDITIONAL NO ADDITIONAL N.C.  12 .06  .08 NO ADDITIONAL	CHARGE CHARGE 194.00 48.00 218.00 34.00 CHARGE 34.00	194.00 48.12 218.06 34.08
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS B.75-16.5/D Highway Nylon Blackwall Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Rear Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/E Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2680-lbs) G31303 Cutaway Van, E34 Steel Hi-Cube Van or G31332 RV Cutaway Van, E34 Steel Hi-Cube Van G31303 Cutaway Van or E34 Steel Hi-Cube Van	WILL BE REFLECTED OF HER OPTIONS' Section  XTE YTE ZTE  YTF  ZTF  XTH  XTH  XTH  YTH  YTH	NO ADDITIONAL NO ADDITIONAL NO ADDITIONAL N.C.  12 .06  .08 NO ADDITIONAL	CHARGE CHARGE 194.00 48.00 218.00 34.00 CHARGE 34.00 CHARGE	194.00 48.12 218.06 34.08
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only, Front (Standard) Spare Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only, Rear Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/E Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2680-lbs) G31303 Cutaway Van, E34 Steel Hi-Cube Van or G31332 RV Cutaway Van or E34 Steel Hi-Cube Van G31303 Cutaway Van, E34 Steel Hi-Cube Van G31303 Cutaway Van or E34 Steel Hi-Cube Van G31303 RV Cutaway Van (Standard) Rear G31303 Cutaway Van or E34 Steel Hi-Cube Van G31303 RV Cutaway Van (Standard) Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75R-16.5/E Highway Steel Belted Blackwall (Maximum Capacity Front and Single Rear 2680-lbs)	WILL BE REFLECTED OF HER OPTIONS' Section  XTE YTE  ZTE  YTF  ZTF  XTH  XTH  XTH  YTH	NO ADDITIONAL NO ADDITIONAL NO ADDITIONAL N.C.  12 .06  .08 NO ADDITIONAL	CHARGE CHARGE 194.00 48.00 218.00 34.00 CHARGE 34.00	194.00 48.12 218.06 34.08
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Front (Standard) Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only. Rear Spare. Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/E Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2680-lbs) G31303 Cutaway Van, E34 Steel Hi-Cube Van or G31332 RV Cutaway Van or E34 Steel Hi-Cube Van G31303 Cutaway Van G84 Belted Blackwall (Maximum Capacity Front and Single Rear 2680-lbs) G31303 Cutaway Van Only	WILL BE REFLECTED OF HER OPTIONS' Section  XTE YTE ZTE  YTF  ZTF  XTH  XTH  XTH  YTH  YTH  YTH  ZTH	NO ADDITIONAL NO ADDITIONAL NO ADDITIONAL N.C.  12 .06  NO ADDITIONAL .08 NO ADDITIONAL	CHARGE CHARGE 194.00 48.00 218.00 34.00 CHARGE 34.00 CHARGE 211.00	194.00 48.12 218.06 34.08 34.08
All rim sizes are 6.75" without R05 Dual Rear Wheels All rim sizes are 6.00" with R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified R05 Dual F HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND For complete specifications and ordering information, see "OT TUBELESS 8.75-16.5/D Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only, Front (Standard) Spare, Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/D On-Off Road Nylon Blackwall (Maximum Capacity 2350-lbs) G31303 Cutaway Van or E34 Steel Hi-Cube Van only, Rear Spare, Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75-16.5/E Highway Nylon Blackwall (Maximum Capacity Front and Single Rear 2680-lbs) G31303 Cutaway Van, E34 Steel Hi-Cube Van or G31332 RV Cutaway Van, E34 Steel Hi-Cube Van G31303 Cutaway Van, E34 Steel Hi-Cube Van G31303 Cutaway Van or E34 Steel Hi-Cube Van G31303 RV Cutaway Van (Standard) Spare, Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified. 8.75R-16.5/E Highway Steel Belted Blackwall (Maximum Capacity Front and Single Rear 2680-lbs)	WILL BE REFLECTED OF HER OPTIONS' Section  XTE YTE ZTE  YTF  ZTF  XTH  XTH  XTH  YTH  YTH	NO ADDITIONAL NO ADDITIONAL NO ADDITIONAL N.C.  12 .06  .08 NO ADDITIONAL	CHARGE CHARGE 194.00 48.00 218.00 34.00 CHARGE 34.00 CHARGE	194.00 48.12 218.06 34.08

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

<sup>♦</sup> State and local taxes not included.

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggester Retail Price⇔
		· · · · · · · · · · · · · · · · · · ·		
res: (Continued)				
00-16.5/C Highway Nylon Blackwall				
Maximum Capacity, Front 1730-lbs) (Dual Rear 1520-lbs)				
Not available on E34 82* Wide Hi-Cube Van or RV Cutaway Van.				
van. Front.				
Without E31 Steel Body or E36 Aluminum Body				
Without B3D School Bus Chassis Equipment	Vec			
With B3D School Bus Chassis Equipment	XSC XSC	N.C.	(-36.00)	(-36.00)
With E31 Steel Body, E36 Aluminum Body, G31603	A30	N.C.	(-36.00)	(-36.00)
Commercial Cutaway Van or Hi-Cube Van (Standard)	xsc	NO ADDITION	AL CHARGE	•
Rear.			-L 0///////	
G31303 or G31603 only				
Without E31 Steel Body or E36 Aluminum Body				
Without B3D School Bus Chassis Equipment	YSC	N.C.	316.00	316.00
With B3D School Bus Chassis Equipment	YSC	N.C.	316.00	316.00
With E31 Steel Body, E36 Aluminum Body, G31603 Commercial Cutaway Van or Hi-Cube Van				
(Standard)	YSC	NO ABBITITION		
Spare	130	NO ADDITION.	AL CHANGE	•
G31303 Commercial Cutaway Van or G31303 Hi-Cube				
Van only. Available on Hi-Cube Van only when P14 or				
P15 Spare Wheel Carrier is specified.				
Without B3D School Bus Chassis Equipment	ZSC	N.C.	176.00	176.00
With B3D School Bus Chassis Equipment	ZSC	N.C.	176.00	176.00
G31603 Commercial Cutaway Van or Hi-Cube Van.				
Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified.	700			
00-16.5/C Highway Polyester Blackwall	ZSC	N.C.	176.00	176.00
faximum Capacity, Front 1730-lbs) (Dual Rear 1520-lbs)				
Not available on E34 Hi-Cube Van or RV Cutaway Van.				
Front				
Without E31 Steel Body or E36 Aluminum Body				
Without B3D School Bus Chassis Equipment	xac	N.C.	(-16.00)	(-16.00)
With B3D School Bus Chassis Equipment	xac	N.C.	(-16.00)	(-16.00)
G31303 E36 Aluminum or E31 Steel Hi-Cube Van only	xoc	N.C.	20.00	20.00
G31603 Commercial Cutaway Van or Hi-Cube Van	XQC	N.C.	20.00	20.00
G31303 or G31603 only				
Without E31 Steel Body or E36 Aluminum Body				
Without B3D School Bus Chassis Equipment	YQC	N.C.	356.00	356.00
With B3D School Bus Chassis Equipment	YQC	N.C.	356.00	356.00 356.00
With E31 Steel Body or E36 Aluminum Body,		11.0.	555.00	550.00
G31603 Commercial Cutaway Van or Hi-Cube Van	YQC	N.C.	40.00	40.00
Spare G31303 Commercial Cutaway Van et G31303 U. G. b			-	
G31303 Commercial Cutaway Van or G31303 Hi-Cube Van only. Available on Hi-Cube Van only when P14 or				
P15 Spare Wheel Carrier is specified.				
Without B3D School Bus Chassis Equipment	zac	<del>-</del>	40000	
With B3D School Bus Chassis Equipment	ZQC	N.C.	186.00	186.00
G31603 Commercial Cutaway Van or Hi-Cube Van.	240	N.C.	186.00	186.00
Available on Hi-Cube Van only when P14 or P15				
Spare Wheel Carrier is specified	zac	N.C.	186.00	186.00
00-16.5/C Highway Polyester Blackwall				. 55.55
aximum Capacity, Front 1730-lbs) (Dual Rear 1520-lbs)				
G31332 RV Cutaway Van only.				
Front	XRQ	(08)	(-50.00)	(-50.08)
Spare	YRQ	(08)	322.00	321.92
	ZRQ	N.C.	186.00	186.00

State and local taxes not included.

Published: FEBRUARY, 1984

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on and after February 13, 1984

	<u> </u>			
Description	Option Number		List Price	Mfr's Suggeste Retail Price♦
Tires: (Continued)				
8.00-16.5 /D Highway Nylon Blackwall				
(Maximum Capacity, Front 2045-lbs) (Dual Rear 1800-lbs)				
Hi-Cube Van with 7500-lb. Rear Axle or G31603 Commercial Cutaway Van only.				
Front. Standard on G31603 H.D. Commercial Cutaway				
Van	XSD	N.C.	34.00	34.00
Rear. Standard on G31603 H.D. Commercial Cutaway			V 1.00	04.00
Van	YSD	N.C.	68.00	68.00
Spare. Commercial Cutaway Van or Hi-Cube Van.				
Available on Hi-Cube Van only when P14 or P15 Spare Wheel Carrier is specified	ZSD	N.C.	102.00	100.00
G31303 Commericial Cutaway Van only. Available only	230	N.C.	193.00	193.00
when B3D School Bus Chassis Equipment and GT8 or HF7				
Axle are specified.				
Front	XSD	N.C.	(-2.00)	(-2.00)
Rear	YSD	N.C.	384.00	384.00
Spare	ZSD	N.C.	193.00	193.00
8.00-16.5/D Highway Polyester Blackwall (Maximum Canadity, Front 2045 the Dual Book 1800 the)				
(Maximum Capacity, Front 2045-lbs, Dual Rear 1800-lbs) G31603 or G31632 only				
Front				
G31603 Commercial Cutaway Van or Hi-Cube Van	XRS	N.C.	54.00	54.00
G31603 H.D. Commercial Cutaway Van	XRS	N.C.	20.00	20.00
G31632. (Standard)	XRS	NO ADDITIONAL		20.00
Rear				
G31603 Commercial Cutaway Van or Hi-Cube Van	YRS	N.C.	108.00	108.00
G31603 H.D. Commercial Cutaway Van	YRS YRS	N.C.	40.00	40.00
Spare. Available on Hi-Cube Van only when P14 or P15	THO	NO ADDITIONAL	CHARGE	
Spare Wheel Carrier is specified. G31603 or RV				
Cutaway Van	ZRS	N.C.	203.00	203.00
G31303 Commercial Cutaway Van only. Available only				
when B3D School Bus Chassis Equipment and GT8 or HF7				
Axle are specified.	¥86			
Front	XRS YRS	N.C. N.C.	18.00 424.00	18.00
Spare	ZRS	N.C.	203.00	424.00 203.00
				200.00
OT Air Conditioning: All-Weather.	HER OPTIONS			
G31303 only.				
G31303 only. Without ZW1 Chassis Group, B3J Diesel Equipment, E31				
G31303 only. Without ZW1 Chassis Group, B3J Diesel Equipment, £31 Steel or E36 Aluminum Hi-Cube Van. Includes K81				
G31303 only. Without ZW1 Chassis Group, B3J Diesel Equipment, £31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator	C60	N.A.	845.00	845.00
G31303 only. Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator With ZW1 Chassis Group, B3J Diesel Equipment, E31				
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator  With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van	C60	N.A.	785.00	785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator  With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van G31332, G31603 or G31632 only				
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator	C60	N.A.	785.00	785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van G31332, G31603 or G31632 only Appearance, Deluxe Front: Included when Z80 Special Exterior Trim is specified. Includes dark argent grille with bright trim.	C60	N.A.	785.00	785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator	C60	N.A.	785.00	785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator	C60	N.A.	785.00	785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator  With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van G31332, G31603 or G31632 only  Appearance, Deluxe Front: Included when Z80 Special Exterior Trim is specified. Includes dark argent grille with bright trim.  Without B3J Diesel Equipment. Includes dual rectangular headlamps  With B3J Diesel Equipment. Also includes single rectangular	C60 C60	N.A. N.A. N.A.	785.00 785.00	785.00 785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator  With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van G31332, G31603 or G31632 only  Appearance, Deluxe Front: Included when Z80 Special Exterior Trim is specified. Includes dark argent grille with bright trim.  Without B3J Diesel Equipment. Includes dual rectangular headlamps  With B3J Diesel Equipment. Also includes single rectangular headlamps	C60 C60	N.A. N.A.	785.00 785.00	785.00 785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van G31332, G31603 or G31632 only Appearance, Deluxe Front: Included when Z80 Special Exterior Trim is specified. Includes dark argent grille with bright trim. Without B3J Diesel Equipment. Includes dual rectangular headlamps With B3J Diesel Equipment. Also includes single rectangular headlamps Batteries: 12-Volt. 515 Cold Cranking Amps Delco	C60 C60	N.A. N.A. N.A.	785.00 785.00	785.00 785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. G31332, G31603 or G31632 only  Appearance, Deluxe Front: Included when Z80 Special Exterior Trim is specified. Includes dark argent grille with bright trim. Without B3J Diesel Equipment. Includes dual rectangular headlamps With B3J Diesel Equipment. Also includes single rectangular headlamps Batteries: 12-Volt. 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is	C60 C60	N.A. N.A. N.A.	785.00 785.00	785.00 785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van G31332, G31603 or G31632 only Appearance, Deluxe Front: Included when Z80 Special Exterior Trim is specified. Includes dark argent grille with bright trim.  Without B3J Diesel Equipment. Includes dual rectangular headlamps With B3J Diesel Equipment. Also includes single rectangular headlamps Batteries: 12-Volt. 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified.	C60 C60 V22 V22	N.A. N.A. N.A.	785.00 785.00 114.00 74.00	785.00 785.00 114.00 74.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator  With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van G31332, G31603 or G31632 only  Appearance, Deluxe Front: Included when Z80 Special Exterior Trim is specified. Includes dark argent grille with bright trim.  Without B3J Diesel Equipment. Includes dual rectangular headlamps  With B3J Diesel Equipment. Also includes single rectangular headlamps  Batteries: 12-Volt. 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified.  Auxiliary.	C60 C60	N.A. N.A. N.A.	785.00 785.00	785.00 785.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator  With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van G31332, G31603 or G31632 only  Appearance, Deluxe Front: Included when Z80 Special Exterior Trim is specified. Includes dark argent grille with bright trim.  Without B3J Diesel Equipment. Includes dual rectangular headlamps  With B3J Diesel Equipment. Also includes single rectangular headlamps  Batteries: 12-Volt. 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified.  Auxiliary.	C60 C60 V22 V22	N.A. N.A. N.A.	785.00 785.00 114.00 74.00	785.00 785.00 114.00 74.00
G31303 only.  Without ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van. Includes K81 66-Amp Generator  With ZW1 Chassis Group, B3J Diesel Equipment, E31 Steel or E36 Aluminum Hi-Cube Van G31332, G31603 or G31632 only.  Appearance, Deluxe Front: Included when Z80 Special Exterior Trim is specified. Includes dark argent grille with bright trim.  Without B3J Diesel Equipment. Includes dual rectangular headlamps With B3J Diesel Equipment. Also includes single rectangular headlamps  Batteries: 12-Volt. 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is specified.  Auxiliary.  Heavy-Duty. Standard on E31 Steel, E36 Aluminum, G31603,	C60 C60 V22 V22	N.A. N.A. N.A.	785.00 785.00 114.00 74.00	785.00 785.00 114.00 74.00

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price♦
оті	HER OPTIONS			
Brake Warning Indicator: Available only when B3D				
School Bus Equipment is specified	ยมา	N.A.	40.00	40.00
Bumper Equipment:				40.00
Bumper, Front. Chromed, Standard on G31632 RV Cutaway				
Van	V46	N.A.	35.00	35.00
G31632 RV Cutaway Van is specified	V31	N.A.	40.00	40.00
Chassis Group, Heavy-Duty: G31303 only, included when E31 or E36 Body is specified on Hi-Cube Van. With ZW9 Commercial Cutaway Van or E34 Steel Hi-Cube Van.	<b>V3</b> 1	N.A.	40.00	40.00
Without B3J Diesel Equipment. Without R05 Dual Rear Wheels. Available only when TH Tires are specified. Includes F60 H.D. Front Springs, G50 H.D. Rear Springs, F59 Stabilizer Bar, UA1 H.D.				
Battery and K81 66-Amp Generator	ZW1	N.A.	214.00	214.00
Generator and UA1 H.D. Battery With B3J Diesel Equipment. Available only when TH Tires or R05 Dual Rear Wheels are specified. Without R05 Dual Rear Wheels. Includes F60 H.D. Front	ZW1	N.A.	110.00	110.00
Springs, G50 H.D. Rear Springs and F59 Stabilzer Bar	ZW1	N.A.	104.00	104.00
With R05 Dual Rear Wheels, Includes F59 Stabilizer Bar	ZW1	NO ADDITIONAL	CHARGE	
With E31 Steel or E36 Aluminum Hi-Cube Van	ZW1	NO ADDITIONAL		
Clock: Quartz Electric  Coolers: Not available when B3J Diesel Equipment is specified.	U35	N.A.	38.00	38.00
Engine Oil. Available only when VO2 Transmission Oil Cooler is specified	KC4	N. A.	416.00	
Transmission Oil. Heavy-Duty	V02	N.A. N.A.	116.00 57.00	116.00 57.00
Cooling System: Heavy-Duty. Not available when C60 Air Conditioning or B3J Diesel Equipment is specified. Includes	_	W.C.	200	37.00
increased cooling capacity radiator and clutch type fan  Floor Covering: Mats Color-Keyed Front Floor. Available	V05	N.A.	51.00	51.00
only when Z73 Special Interior Trim is specified	B32	N.A.	20.00	20.00
Gages: Voltmeter, Temperature and Oil Pressure. Standard	759			
on G31632 RV Cutaway Van . <b>Generator:</b> <i>66-Amp Delcotron.</i> G31303 only. Standard on G31603 or RV Cutaway Van. Included when ZW1 Chassis Group, E31 Steel or E36 Aluminum Body, B3J Diesel	<b>Z53</b>	N.A.	38.00	38.00
Equipment or C60 Air Conditioning is specified	K81	N.A.	60.00	60.00
All Windows. Includes A02 Windshield Glass	A01	N.A.	44.00	44.00
Windshield only. Included when AO1 Glass is specified	A02	N.A.	35.00	35.00
Headlamps: Halogen. Not available with V22 Deluxe Front Appearance or Z80 Special Exterior Trim unless B3J Diesel Equipment is				
specified	TT4	N.A.	21.00	21.00
available when B3J Diesel Equipment is specified	TT5	N.A.	16.00	16.00
Heater, Engine Block: 600 watts, 120 volts. Not available when B3J Diesel Equipment is specified	К05	N.A.	31.00	31.00
Lamps: Rear Side Marker, Standard on Hi-Cube Van.	110.4			
Shipped loose for Body Company installation  Lighter, Cigarette: Standard on RV Cutaway Van.	UB4	N.A.	11.00	11.00
Included when Z73 Special Interior Trim is specified	U37	N.A.	29.00	29.00

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on end after February 13, 1984

irrors, Exterior: LH and RH.  Idow-Eye-Line Type. 9" x 6.5". Painted. Commercial Cutaway Van only. Included when E34 Steel Hi-Cube Van is specified Imper Type. 7.5" x 10.5". Painted. Standard on E36 or E39 Aluminum Hi-Cube Van, E31 Steel Hi-Cube Van or E38 Steel Hi-Cube Van. Not available on G31303 82" Wide E34 Steel Hi-Cube Van Stainless Steel. Not available when E34 Steel Hi-Cube Van	HER OPTIONS	N.A.	63.00	
low-Eye-Line Type. 9" x 6.5". Painted. Commercial Cutaway Van only. Included when E34 Steel Hi-Cube Van is specified Imper Type. 7.5" x 10.5". Painted. Standard on E36 or E39 Aluminum Hi-Cube Van, E31 Steel Hi-Cube Van or E38 Steel Hi-Cube Van, Not available on G31303 82" Wide E34 Steel Hi-Cube Van Stainless Steel. Not available when E34 Steel Hi-Cube Van	D44	N.A.	63.00	
Van only, Included when E34 Steel Hi-Cube Van is specified imper Type. 7.5" x 10.5". Painted, Standard on E36 or E39 Aluminum Hi-Cube Van, E31 Steel Hi-Cube Van or E38 Steel Hi-Cube Van, Not available on G31303 82" Wide E34 Steel Hi-Cube Van Stainless Steel, Not available when E34 Steel Hi-Cube Van	D44	N.A.	63.00	
Imper Type. 7.5" x 10.5". Painted. Standard on E36 or E39 Aluminum Hi-Cube Van, E31 Steel Hi-Cube Van or E38 Steel Hi-Cube Van. Not available on G31303 82" Wide E34 Steel Hi-Cube Van Stainless Steel. Not available when E34 Steel Hi-Cube Van	D44	N.A.	63.00	
E31 Steel Hi-Cube Van or E38 Steel Hi-Cube Van. Not available on G31303 82° Wide E34 Steel Hi-Cube Van Stainless Steel. Not available when E34 Steel Hi-Cube Van				63.00
	DF1	N.A.	85.00	85.00
is specified. Commercial Cutaway Van or RV Cutaway Van only E31 or E38 Steel Hi-Cube Van, E36 or E39 Aluminum	DF2	N.A.	98.00	98.00
Hi-Cube Van	DF2	N.A.	13.00	13.00
reliminary Price Information	B3W	N.A.	N.A.	N.A.
edio Equipment:		G.A.	17.7.	17.74.
M Radio. Includes dual front speakers	U <b>63</b>	N.A.	112.00	112.00
M/FM Radio	U69	N.A.	171.00	171.00
M/FM Stereo Radio	U58	N.A.	178.00	178.00
M/FM Stereo Radio with Stereo Cassette Tape	UN3	N.A.	278.00	278.00
chool Bus Chassis Equipment: G31303 Cutaway on only. Available only when F51 Shock Absorbers and R05 and Rear Wheels are specified. Includes 1950-lb each H.D.				
ont Springs. Also includes 3000-lb each H.D. rear springs less HF7 or GT8 Rear Axle is specified	B3D	N.A.	20.00	20.00
mat: Front Auxiliary. Stationary Type. Included when Z73 becial Interior Trim is specified. Includes RH armrest, seat ljuster, seat belt and D20 Passenger Sunshade. (Added eight includes passenger weight allowance of 150-lbs per ating position. Refer to vehicle and option weight section of		N.A.	20.00	20.00
ata Book.) hock Absorbers: Front and Rear, Heavy-Duty. G31303	A57	N.A.	168.00	168.00
G31332 only	F5 1	N.A.	32.00	32.00
peed Control, Electronic	K34	N.A.	185.00	185.00
prings: Heavy-Duty. G31303 only. Standard on G31603 of RV Cutaway Van. Not available when R05 Dual Rear (heels or E31 or E36 Body is specified. Included when ZW1 hassis Group is specified.				
ont. Capacity 1950-lb each	F60	N.A.	14.00	14.00
ear. Capacity 3000-lb each. Not available when B3D School Bus Chassis is specified	G50	N.A.	55.00	55.00
tabilizer Bar: Front. G31303 only. Standard on G31603, 31332 or G31632. Included when ZW1 Chassis Group is	<del>330</del>	N.A.	33.00	55.00
pecified	F59	N.A.	35.00	35.00
teering Wheels:				
omfortilt	N33	N.A.	110.00	110.00
ustom	N31	N.A.	25.00	25.00
unshade, Passenger: Included when A57 Auxiliary eat or Z73 Special Interior Trim is specified	D20	N.A.	18.00	18.00
ank, Fuel: Approximately 33-gallon capacity. Replaces andard fuel tank. Standard on RV Cutaway Van	NL7	N.A.	85.00	85.00
Vheel Trim: Bright Metal Wheel Covers. Available only hen R05 Dual Rear Wheels, E31 Steel or E36 Aluminum Body				
specified	PO1	N.A.	52.00	52.00

 <sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

### CUTAWAY/VANDURA SPECIAL/RALLY CAMPER SPECIAL/MAGNAVAN AND HI-CUBE VAN

#### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on and after February 13, 1984

Wheels, Dual Rear: Standard on E31 Steel Hi-Cube Van or G31303 E36 Aluminum Hi-Cube Van, G31803 or G31832 only. Not available on E34 Steel Hi-Cube Van, Includes hydraulic power assisted brake system, 3400-lb capacity front springs, 6000-lb capacity rear springs, dual rear chassis provisions and 6200-lb capacity rear axle as reflected on Power Teams Chart. G31303 ZW9 Commercial Cutaway Van, Available only when ZW1 Chassis Group is specified. Not available when TE, TF or TH Tires are specified. G31332 RV Cutaway Van, Not available when TH or VD Tires are specified. Wheels, Single Rear: G31303 Commercial Cutaway Van or G31333 RV Cutaway Van only. Not available when R05	R OPTIONS  R05 R05	N.A.		
or G31303 E36 Aluminum Hi-Cube Van, G31803 or G31832 only. Not available on E34 Steel Hi-Cube Van, Includes hydraulic power assisted brake system, 3400-lb capacity front springs, 6000-lb capacity rear springs, dual rear chassis provisions and 6200-lb capacity rear axle as reflected on Power Teams Chart.  G31303 ZW9 Commercial Cutaway Van, Available only when ZW1 Chassis Group is specified. Not available when TE, TF or TH Tires are specified.  G31332 RV Cutaway Van, Not available when TH or VD Tires are specified.  Wheels, Single Rear: G31303 Commercial Cutaway Van or G31332 RV Cutaway Van only. Not available when R05		N.A.		
springs, 6000-lb capacity rear springs, dual rear chassis provisions and 6200-lb capacity rear axle as reflected on Power Teams Chart. G31303 ZW9 Commercial Cutaway Van. Available only when ZW1 Chassis Group is specified. Not available when TE, TF or TH Tires are specified G31332 RV Cutaway Van. Not available when TH or VD Tires are specified Wheels, Single Rear: G31303 Commercial Cutaway Van or G31332 RV Cutaway Van only. Not available when R05		N.A.		
TE, TF or TH Tires are specified G31332 RV Cutaway Van. Not available when TH or VD Tires are specified Wheels, Single Ream: G31303 Commercial Cutaway Van or G31332 RV Cutaway Van only. Not available when R05		N.A.		
Tires are specified	R05		431.00	431.00
or G31332 NV Cutaway van only, Not available when NOS		N.A.	341.00	341.00
Dual Rear Wheels are specified	RO4	NO ADDITION	AL CHARGE	
specified. Commercial Cutaway and RV Cutaway, Available only when				
RO5 Dual Rear Wheels are specified on G31303 or G31332	ØE6	N.A.	46.00	46.00
Carrier is specified	QE6 A31	N.A. N.A.	46.00 180.00	46.00 180.00
Windshield Wiper System: Intermittent	CD4	N.A.	50.00	50.00
<del></del>		<del></del>	<del></del>	
<del></del>	<del></del>	<del></del>		
<del></del>				
		<del></del>		
<del></del>		<del></del> -		
·			<del></del>	

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

Published: FEBRUARY, 1984

### **HI-CUBE VAN/MAGNAVAN**

#### OPTIONS AND ACCESSORIES WHEN INSTALLED BY UNION CITY BODY COMPANY

Carrier, Spare Wheel: Inside Mounted.   P14	Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price♦
Regular Body Options only	Desier Note: When ordering E31, E34, E36, E38 or E39				
Pagular Body Options only					
Carrier, Spare Wheel: Inside Mounted.  H Side P15 N.A. 28.00 28.00  Doors, Rear: Replacing standard double doors with 38'  Opening.  O' opening. With strap hinges E76 N.A. 87.00 87.00  Steel Hi-Cube Van only E46 N.A. 442.00 442.00  The opening. Overhead rear door with glass. Available on E31  Steel Hi-Cube Van only E78 Opening. Overhead rear door with glass. Available on E31  The opening. Overhead rear door with glass. Available on E31  The opening. Overhead rear door with glass. Available on E31  The opening. Overhead rear door with glass. Available on E31  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead rear door with glass. Available on E36  The opening. Overhead over are door with glass. Available on E36  The opening. Overhead over are door with glass. Available on E36  The opening. Overhead over are door with glass. Available on E36  The opening. Overhead over are door with glass. Available on E36  The opening. Overhead overhead rear door with glass. Available on E36  The opening. Overhead overhead rear door with glass. Available on E36  The opening. Overhead overhead rear door with glass. Available on E36  The opening. Overhead overhead rear door with glass. Available on E36  The opening. Overhead overhead rear door with glass. Available on E36  The opening. Overhead overhead rear door with glass. Available on E36  The opening. Overhead overhead rear door with glass. Available on E36  The opening. Overhead overhead rear do	Regular Body Options only		NO ADDITIONA	L CHARGE	
## Side	Special Body Options required	YJ2	NO ADDITIONA	L CHARGE	
## Side	Couries Cours Mihaalt Inride Moueted				
Doors, Rear: Replacing standard double doors with 38' opening.  Browning. With strap hinges	LH Side	P14	N.A.	28.00	28.00
## Propersions	RH Side	P15	N.A.	28.00	28.00
60° opening. With strap hinges					
Steel Hi-Cube Van only	60" opening. With strap hinges	E76	N.A.	87.00	87.00
Steel Hi-Cube Van only	Steel Hi-Cube Van only	E46	N.A.	442.00	442.00
or E38 Steel Hi-Cube Van only	Steel Hi-Cube Van only	E79	N.A.	195.00	195.00
or É39 Aluminum Hi-Cube Van only E46 N.A. 442.00 442.00 87* Opening. Includes door glass. Available on E36 or E39 Aluminum Body Hi-Cube Van only E53 N.A. 233.00 233.00 Lock, Rear Door: Slam Type. Available on E36 or E39 Aluminum Hi-Cube Van only. Not available when E46 Overhead Door is specified AX9 N.A. 69.00 69.00 Partitions: Expanded Metal. AX7 N.A. 378.00 378.00 Left-Hand Side only AX5 N.A. 150.00 150.00 Partition, Plywood: With Center Sliding Door AP7 N.A. 240.00 240.00 Vantilator: Roof. Crank Type C55 N.A. 102.00 102.00 For special body work not covered by the above options, refer to Union City Body Company Sales Department. Subsequent installation		E46	N.A.	442.00	442.00
### 87" Opening. Includes door glass. Available on E36 or E39   Aluminum Body Hi-Cube Van only	85" opening. Overhead rear door with glass. Available on E36 or E39 Aluminum Hi-Cube Van only	E46	N.A.	442.00	442.00
Lock, Rear Door: Slam Type. Available on E36 or E39 Aluminum Hi-Cube Van only. Not available when E46 Overhead Door is specified	87" Opening. Includes door glass. Available on E36 or E39	FS3			
Overhead Door is specified         AX9         N.A.         69.00         69.00           Partitions: Expanded Metal.         AX7         N.A.         378.00         378.00         378.00         150.00         150.00         150.00         150.00         150.00         150.00         150.00         240.00         240.00         240.00         240.00         240.00         260.00         102.00<	Lock, Rear Door: Slam Type. Available on E36 or E39	230	N.A.	233.00	255.00
Partitions: Expanded Metal.           Center Sliding Door         AX7         N.A.         378.00         378.00           Left-Hand Side only         AX5         N.A.         150.00         150.00           Partition, Plywood: With Center Sliding Door         AP7         N.A.         240.00         240.0           Vantilator: Roof. Crank Type         C55         N.A.         102.00         102.0           For special body work not covered by the above options, refer to Union City Body Company Sales Department. Subsequent installation	Aluminum Hi-Cube Van only. Not available when E46 Overhead Door is specified	AX9	N.A.	69.00	69.00
Left-Hand Side only AX5 N.A. 150.00 150.00  Partition, Plywood: With Center Sliding Door AP7 N.A. 240.00 240.00  Vantilator: Roof. Crank Type C55 N.A. 102.00 102.00  For special body work not covered by the above options, refer to Union City Body Company Sales Department. Subsequent installation	Partitions: Expanded Metal.				
Partition, Plywood: With Center Sliding Door       AP7       N.A.       240.00       240.0         Vantilator: Roof. Crank Type       C55       N.A.       102.00       102.0         For special body work not covered by the above options, refer to Union City Body Company Sales Department. Subsequent installation	Center Sliding Door				378.00
Vantilator: Roof. Crank Type	·				
For special body work not covered by the above options, refer to Union City Body Company Sales Department. Subsequent installation	•				240.00
		·			
			-		
		·			

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

# **NOTES**

# CUTAWAY VAN & HI-CUBE VAN RALLY CAMPER SPECIAL, VANDURA SPECIAL & MAGNAVAN

CAB & BODY FEATURES
CHASSIS FEATURES
COLOR & TRIM CHARTS
TWO-TONES

# CUTAWAY VAN RALLY CAMPER SPECIAL & VANDURA SPECIAL

### STANDARD MODEL—BODY ORDERING CODE—ZW9

The standard model includes the following items as standard equipment



#### **EXTERIOR**

- Bumper: Front only; painted silver (Model G31632 has chrome front bumper)
- Colors: See Interior and Exterior Color Selection Chart
- Doors: RH and LH front side doors
- Door Opening and Locking Methods:


Outside pushbutton latch release in door handle with separate key lock; depression of inside pushbutton provides keyless outside locking feature

- Glass: Windshield; RH and LH front side door drop glass and pivoting ventipanes
- Grille: Molded plastic; painted light argent; integral Chevrolet emblem/GMC letters at center
- Grille Frame: Headlamp/parking lamp bezels plus upper and lower moldings joining extensions of lamp bezels; painted light argent
- Horn: Single, electric low-note (Models G31332, G31632 have second high note horn)

- Hub Caps: Bright metal with black trim (single rear wheel 125" WB only)
- Keys: Two-key system, with separate keys for ignition switch and door locks
- Lights:

Headlamps: Two; Rectangular Combination parking/direction/hazard: Two front Side marker lamps with reflectors: Two front NOTE: Wiring for rear lamps is included; with body portion coiled and wrapped

- Nameplates: Bright "Chevy Van/Vandura" name and series plates on front fenders
- Undercoating: On step panels and front wheelhousings
- Wheels: Painted white
- Windshield Wipers and Washers: Electric, 2-speed wipers with matte finish on exposed metal portions; wet-arm design demand-type washer system

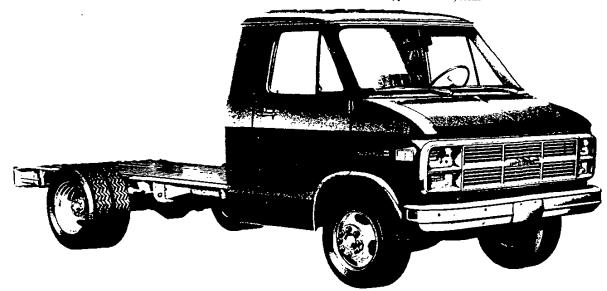

Cutaway Van & Hi-Cube Van—Page B


**General Motors Corporation** 

February, 1984

# CUTAWAY VAN RALLY CAMPER SPECIAL & VANDURA SPECIAL

### STANDARD MODEL—BODY ORDERING CODE—ZW9

The standard model includes the following items as standard equipment

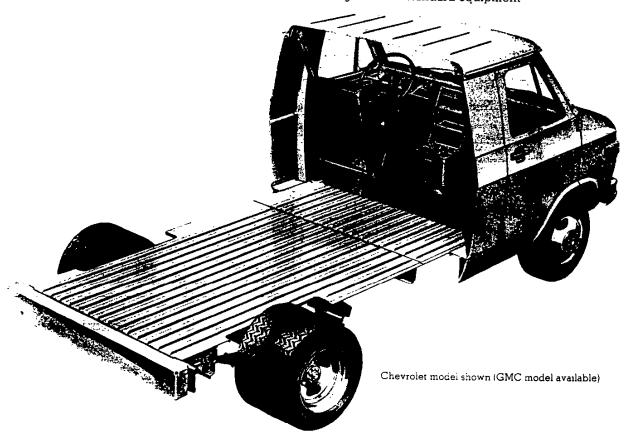

#### INTERIOR

- Air Vents: RH and LH; individually controlled
- Armrest: LH side door; padded
- Ashtray: At top of instrument panel extension; with door
- Cigar Lighter: RV Cutaway Van/Rally Camper Special models only; includes ash tray light
- Colors:

Painted areas: Same as exterior primary color choice Interior trim: Coordinated with seat trim color choice

- Dome Lamp: In front compartment area.
- Door Locks: Inside pushbutton lock/release
- Door Seals: Latex foam rubber
- Floor Covering: Embossed black rubber mats on entire front floor area and wheelhousings
- Headliner: Mystic colored perforated hardboard with insulator (except Model G31332)
- Heater and Defogger: Deluxe-air
- Hood Lock Release: Handle located on LH side of instrument panel
- Instruments:

Gages: Speedometer, odometer, and fuel (Model G31632 RV Cutaway Van/Raily Camper Special also has voltmeter, oil pressure gage, and engine temperature gage)


pressure gage, and engine temperature gage)
Switches: Main, for control of exterior lights, dome light and instrument lights; multi-function switch on steering column for direction signals by moving lever up or down (includes lane change position), headlight beams by pulling lever toward driver, windshield wiper by turning band marked "WIPER" toward or away from driver, and windshield washer by pushing in the lever knob; ignition with key-in warning buzzer; hazard warning; heater fan; door-operated dome light (except Model G31332)

- Warning lights: Generator, oil pressure, engine temperature (except Model G31632—see "gages" above), service-parking brake, direction/hazard signal, and high beam
- Instrument Panel: Bright trim on gage bezels; black applique with bright trim on area below instrument cluster
- Insulation and Sound Deadening Material: Dash (firewall), entire front floor panel (except wheelhousings), inside engine cover, on engine cover front extension and under headliner (except Model G31332)
- Lights: Instrument and dome (except Model G31332)
- Main Light Switch Control Knob: Bright, with brushed finish and black graphic identification
- Mirror, Rearview: 10" prismatic with soft vinyl rim
- Parcel Tray: On top surface of instrument panel extension; includes beverage holder provisions
- Safety Step Pads: Front door step panels
- Seat: Front bucket, driver; all-vinyl trim; foam padded, adjustable.
   Also available at extra cost: High back driver and passenger seats in standard vinyl or custom vinyl. See Interior and Exterior Color Selection Chart for color and trim availability
- Seat Belt: Color-keyed with pushbutton release and outboard retractor
- Steering Wheel and Column: 15.25" diameter black soft vinyl wheel with 2 spokes; black energy-absorbing steering column with anti-theft locking feature
- Stowage Box: In front face of instrument panel extension; with door
- Sunshades: LH padded, color-keyed
- Trim Panels: Painted metal with decorative embossments; front side doors

### **HI-CUBE VAN/MAGNAVAN**

#### **CUSTOM FEATURES—STANDARD MODEL**

The standard model includes all items listed for the ZW9 Cutaway Van model plus the following additions or substitutions

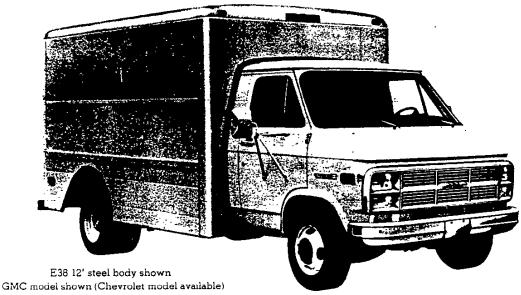

#### **EXTERIOR**

#### Body Panels and Framing:

With E31, E34 or E38 steel van body: Steel body panels, framing, and floor

With E36 or E39 aluminum van body: Aluminum body panels and framing; steel floor

- Bumper, Rear: Step type; painted black
- Door Body Protective Bumpers: Rubber; mounted at rear of body to prevent damage when opening rear doors
- Door Opening and Locking Method (Rear Doors): RH and LH rear panel doors with glass; RH door contains inside and outside turn handle latch release with key lock cylinder in outside handle; LH door opened by inside release at top of door.
- Hub Caps: Model G31303 with E34 only

- Identification Decal: "Chevrolet/GMC" letters on roof poove rear identification lamps


• Lights:
Backup lamps: Two rear

Combination tail/stop/direction/hazard: Two rear License plate lamps; Two rear

Side marker lamps and reflectors: Two rear

Amber front identification and clearance lamps: Five Red rear identification and clearance lamps: Five


- Mirrors: RH and LH; painted white
- Undercoating: On side panels below floor and on rear wheelhousings

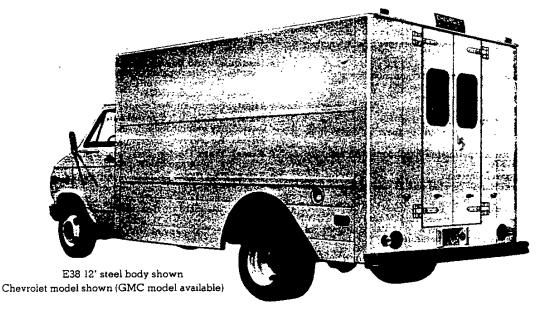

### HI-CUBE VAN/MAGNAVAN


#### **CUSTOM FEATURES—STANDARD MODEL**

The standard model includes all items listed for the ZW9 Cutaway Van model plus the following additions or substitutions

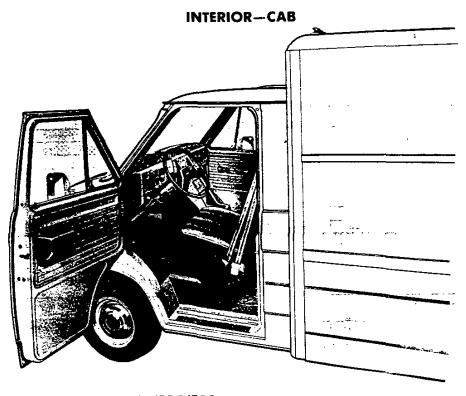

#### INTERIOR—STEEL BODIES E31/E34/E38 (E38 12' steel body shown)


- Cargo Area Lamp: Activated via main light switch
- Door Seals: Closed cell sponge rubber
- Floor: 18-gage corrugated steel
- Headliner: Embossed steel; on entire interior roof area



Optional 78" roll-up rear door shown in illustration GMC model shown (Chevrolet model available)

# INTERIOR—ALUMINUM BODIES E36/E39 (E39 12' aluminum body shown)

- Cargo Area Lamp: Activated via main light switch
- Floor: 18-gage corrugated steel



Optional 85" roll-up rear door shown in illustration Chevrolet model shown (GMC model available)

February, 1984

**General Motors Corporation** 

Cutaway Van & Hi-Cube Van -- Page E


# CUTAWAY VAN & HI-CUBE VAN RALLY CAMPER SPECIAL, VANDURA SPECIAL & MAGNAVAN

### INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART


Please Note: Below are the interior trim color and exterior paint combinations recommended by Chevrolet/GMC. The only available primary/secondary exterior color combinations are those shown in the chart below; nowever, any available interior trim color may be ordered with one of these exterior color combinations if that particular combination is desired by the customer.

INTERIOR COLORS		Decor	Black	Blue	Burgundy	Mahogany	Saddle Tan	Cinta Cana
STANDARD MODEL (Two Seats w/A57) Vinyl Driver's Seat		Std.		VDD2			VSS2	State Gray
Vinyl High Back Bucket Drivers Seat	1		VDD4	† · · · · · · · · · · · · · · · · · · ·		VSS4	· · · · · · · · · · · · · · · · · · ·	
Custom Vinyl High Back Bucket Driver's Se	at	<u>L</u> .	XBB4	XDD4	XEE4		XSS4	XTT4
SPECIAL INTERIOR (Includes Two Seats)  Custom Vinyl High Back Bucket Seats  Custom Cloth High Back Bucket Seats	Z73		XDD4	XEE4		XSS4	X114 X1T4	
EXTERIOR COLORS			KDD4	KEE4	KNN4	KSS4	KTT4	
	Primary	Secondary		RECO	MMENDED INT	ERIOR TRIM CO	)LORS	
BLUE, LIGHT (Metallic)	21	21		X				X
BLUE, GALAXY (Metallic)	28	28		×				x
BRONZE, INDIAN (Metallic)	66	66				X	X	200000000000000000000000000000000000000
RED, APPLE	72	72			X	*********	<del></del> -	
RED. AUTUMN (Metallic)	76	76			<del>-</del> -		<u> </u>	
SAND, DESERT (Metallic)	64	64			000000000000000000000000000000000000000	X	0.0000000000000000000000000000000000000	
SILVER (Metallic)	16	16	Y	X	X	<del></del>	X	
TAN, DOESKIN	61	61	20000000000	000000000000000000000000000000000000000	************			X
WHITE, FROST	12	12				×	X	
WHITE, POLAR			Х	X	X	X	X	x
	93	93	X	Х ,	Х	Х	X	×
YELLOW, COLONIAL	53	53			*********	×	×	200000000000000000000000000000000000000

#### **Paint Applications**

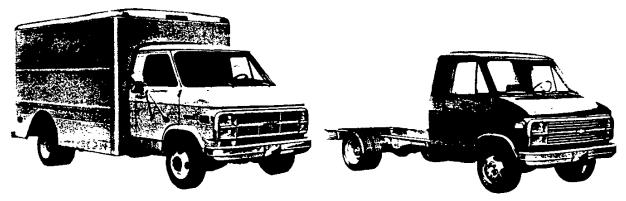


Solid Color paint (ZYI) is standard on Cutaway Vans and on steel Hi-Cube Van/Magnavan models and is available on aluminum Hi-Cube Van/Magnavan models. All painted areas of the cab or cab and van body are painted the same color.



**Two-Tone** paint treatment (ZY2) is available on aluminum Hi-Cube Van/Magnavan models only. The cab is painted the selected primary color, and the aluminum van body is *unpainted*, bare aluminum (secondary color code 02 must be specified).


# STEP-VAN/VALUE VAN STEP-VAN/VALUE VAN & FC CHASSIS MODEL SELECTOR



**FC CHASSIS** 

Body Ordering Code—Gasoline Models—ZW9 Body Ordering Code—Diesel Models—ZW9/B3J


SERIES	125" WB	133" WB	157" WB	178" WB
■P20/2500	P20842	P21042	-	_ `
P30/3500	P30842	P31042	P31442	P31842



#### STEP-VAN/VALUE VAN — STEEL

Body Ordering Code—Gasoline Models—E32 Body Ordering Code—Diesel Models—E32/B3J

SERIES	10'6" BODY	12'6" BODY	14'6" BODY
<b>■P20/2500</b>	P20842	P21042	
P30/3500	P30842	P31042	P31442



#### STEP-VAN/VALUE VAN—ALUMINUM

Body Ordering Code—Gasoline Models—E33 Body Ordering Code—Diesel Models—E33/B3J

SERIES	10'6" BODY	12'6" BODY	14'6" BODY	18' BODY.
■P20/2500	P20842	P21042		
P30/3500	P30842	P31042	P31442	P31842

■P20/2500 models not available for registration in the State of California.

September, 1983

**General Motors Corporation** 

Step-Van/Value Van—Page 1

GASOLINE

# STEP-VAN/VALUE VAN STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	■P20/2500	P30/3500 (except P31842)	P31842			
Engine Base Equip. Clutch Air Filter	Poly	4.8 Liter, 292 1-bbl L6 11," 124 sq. in. r-wrapped Oiled-paper Ele	ement			
Oil Filter Exhaust System Emission Control Systems		Throwaway Type Single; Aluminized ooling Section for specific	model application			
Suspension, Front		Independent; Coil Spring				
Capacity Springs @ Ground Shock Absorbers Stabilizer Bar	3700 lb. 1800 lb. ea.	4000 lb. 2200 lb. ea. 32mm dia. 1.25" dia.	4000 lb. 2200 lb. ea.			
Suspension, Rear Axle Capacity Axle Ratio Springs @ Ground	5700 lb. 3.73 2200 lb. ea.	Hypoid Drive; Two-stage 1 7900 lb. 4.56 3100 lb. ea.	Multi-leaf Springs 7900 lb. 5.13 4000 lb. ea.			
Shock Absorbers  Brakes Front	Hydraulic; Self-adjusting Disc; 12.5" Rotor					
Rear Booster Parking	Dual Diaphragm	Drum; 13" x 2.5" Dual Diaphragm Cable to Rear Wheels	Drum; 13" x 3.5" Hydraulic Power			
Electrical Battery – Freedom Type – Reserve Capacity Delcotron Generator		12 Volt; Negative Ground 390 CCA ◆ @ 0°F. 90 min. @ 80°F. 42 amp.	1			
Frame Section Modulus	5.26	Carbon Steel; 36, 39,000 p. 125;" 133" WB-5.26 157" WB-6.12	si 6.12			
Fuel Tank (nominal capacity)		40 gal.				
Steering Gear Type		Integral Power				
Transmission Shift Location		4-Speed Manual Floor				
Tires — Front	(2) LT215/85R16C (6PR) (2) LT215/85R16C (6PR)	(2) LT215/85R16C (6PR) (2) LT215/85R16D (8PR)	(2) LT215/85R16C (6PR) (4) LT215/85R16C (6PR)			
Wheels	(4) Disc 16" x 6.5"	(4) Disc 16" x 6.5"	(6) Disc 16" x 6.0"			

<sup>■</sup>P20/2500 models not available for registration in the State of California.

<sup>◆</sup>CCA—Cold Cranking Amps

#### DIESEL

# STEP-VAN/VALUE VAN STANDARD SPECIFICATIONS

(See Gray Tab Section for Specification Details)

Series	■P20/2500	P30/3500 (except P31842)	P31842						
Engine									
Base Equip.	6.2	Liter, 379 Cu. In. V8 Dies	sel						
Clutch		12," 150 sq. in.							
Air Filter	Poly-wrapped Oiled-paper Element								
Oil Filter	Throwaway Type								
Oil Cooler		Standard							
Exhaust System		Dual: Aluminized							
Emission Control		,							
Systems	See Engine & Co	oling Section for specific i	model application						
Suspension, Front	1	ndependent; Coil Springs	<u> </u>						
Capacity		4000 lb.	4000 lb.						
Springs @ Ground		2200 lb. ea.	2200 lb. ea.						
Shock Absorbers		32mm dia.							
Stabilizer Bar		1.25" dia.							
Suspension, Rear	Salisbury Axle; F	lypoid Drive; Two-stage N	Multi-leaf Springs						
Axle Capacity	5700 lb.	7900 lb.	7900 lb.						
Axle Ratio	3.73	3.73	4.10						
Springs, Main @									
Ground	. 2200 lb. ea.	3100 lb. ea.	4000 lb. ea.						
Shock Absorbers		32mm dia.							
Brakes		Hydraulic; Self-adjusting							
Front	•	Disc; 12.5" Rotor							
Rear	Drum; 11.15" x 2.75"	Drum; 13" x 2.5"	Drum; 13" x 3.5"						
Booster		Hydraulic Power	<u> </u>						
Parking		Cable to Rear Wheels							
Electrical		12 Volt; Negative Ground	م,						
Battery - Freedom Type	1	ľwo; 550 CCA + ea. @ 0°F	•						
-Reserve Capacity.		115 min. ea. @ 80°F.							
Delcotron Generator	1	66 amp.							
Engine Block Heater		600 watts, 120 volts							
Frame		Carbon Steel; 36,-39,000 ps	3ì						
Section Modulus	5.26	125," 133" WB-5.26	6.12						
		157" WB-6.12							
Fuel Tank (nominal									
capacity)		40 gal.							
Steering Gear Type		Integral Power	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1						
Transmission Shift Location		4-Speed Manual Floor							
Tires - Front	*(2) LT215/85R16C (6PR)	(2) LT215/85R16C (6PR)	(2) LT215/85R16C (6PR)						
-Rear	*(2) LT215/85R16C (6PR)								
Wheels	(4) Disc	(4) Disc	(6) Disc						
	16" x 6.5"	16" x 6.5"	16" x 6.0"						

<sup>■</sup>P20/2500 models not available for registration in the State of California.

<sup>◆</sup>CCA—Cold Cranking Amps


<sup>\*</sup>Steel body (E32/B3J) Step-Van models have D (8PR) tires.

GASOLINE

# STEP-VAN/VALUE VAN

P20/2500-30/3500 SERIES-FC CHASSIS

**Body Ordering Code—ZW9** 

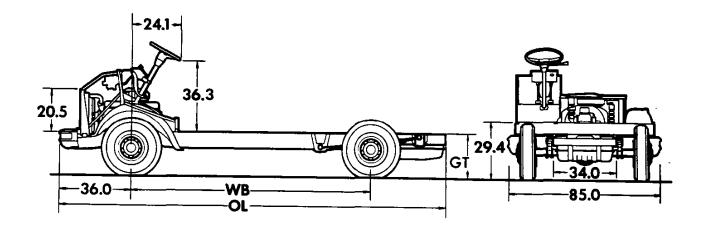

Model	Engine No. Cyl.	Dim	ensions (	in)*	Cuz	b Weight ()	<b>lb)</b> †	Ground Clearance (in)*	
		WB	OL	GT	Front	Rear	Total	Front	Rear

#### ■P20/2500 SERIES

P20842	6	125	214.8	27.9	1868	1290	3158	8.5	6.9
P21042	6	133	238.8	27.9	1869	1302	3171	8.5	6.9

#### **P30/3500 SERIES**

P30842	6	125	214.8	29.1	1878	1418	3296	8.8	7.2
P31042	6	133	238.8	29.1	1882	1435	3317	8.8	7.2
P31442	6	157	262.8	29.1	1945	1480	3425	8.8	7.2
P31842	6	178	318.4	29.1	2009	1847	3856	8.8	7.2

<sup>\*</sup>Dimensions with standard equipment, unloaded.


<sup>†</sup>Total Curb Weight may vary as much as  $\pm$  50 lbs. to allow for production build variation.

<sup>■</sup>P20/2500 models not available for registration in the State of California.

# STEP-VAN/VALUE VAN P20/2500-30/3500 SERIES—FC CHASSIS

DIESEL

Body Ordering Code—ZW9/B3J

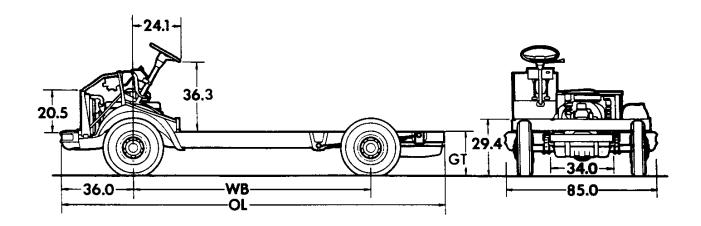

Model	Engine No. Cyl.	Dim	ensions (	(in)*	Cu	rb Weight ()	Ground Clearance (in)*		
	140. Cy1.	WB	OL	GT	Front	Rear	Total	Front	Rear

#### ■P20/2500 SERIES

P20	842	8	125	214.8	27.9	2192	1276	3468	8.5	6.9
P21	042	8	133	238.8	27.9	2193	1285	3478	8.5	6.9

#### **P30/3500 SERIES**

P30842	8	125	214.8	29.1	2202	1404	3606	8.8	7.2
P31042	8	133	238.8	29.1	2206	1418	3624	8.8	7.2
P31442	8	157	262.8	29.1	2284	1460	3744	8.8	7.2
P31842	8	178	318.4	29.1	2338	1934	4272	<b>8.8</b> .	7.2

<sup>\*</sup>Dimensions with standard equipment, unloaded.


<sup>†</sup>Total Curb Weight may vary as much as  $\pm$  50 lbs. to allow for production build variation.

<sup>■</sup>P20/2500 models not available for registration in the State of California.

GASOLINE

### STEP-VAN/VALUE VAN STEP-VAN/VALUE VAN—STEEL BODY

Body Ordering Code—E32

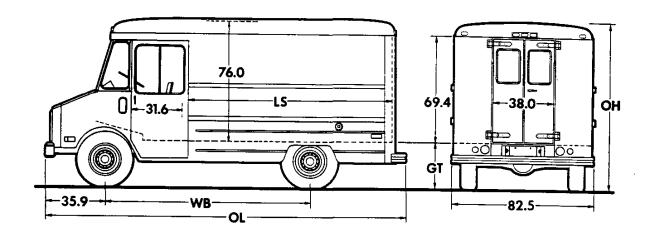

Series	Gro Clearan	und ce (in)*
	Front	Rear
P2	8.5	6.9
P3	8.8	7.2


Model	del Engine No. Cyl.		Dime	nsions	(in)★		Curb	Weigh	t (1b)	Model	Weigh	t (lb)†	Body-F Wt.	Payload Dist:
		WB	OL	LS	ОН	GT	Front	Rear	Total	Front	Rear	Total	% Front	% Rear
				.,,	=P20	/250	O SER	IES						•
P20842	6	125	226.8	128	109.5	26.9	2729	3131	5860	2838	3172	6010	9	91
P21042	6	133	250.8	152	109.5	26.7	2837	3285	6122	2949	3323	6272	6	94
					P30/	3500	SERI	ES	· · · · · ·		·			
P30842	6	125	226.8	128	109.5	27.2	2739	3259	5998	2848	3300	6148	9	91 -
P31042	6	133	250.8	152	109.5	27.2	2851	3418	6269	2963	3456	6419	6	94
P31442	6	157	274.8	176	109.5	26.9	3085	3535	6620	3203	3567	6770	12	88

<sup>\*</sup>Dimensions with standard equipment, unloaded.
†Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.
\*Estimate based on water-level loading.
■P20/2500 models not available for registration in the State of California.

### STEP-VAN/VALUE VAN STEP-VAN/VALUE VAN-STEEL BODY

DIESEL

Body Ordering Code—E32

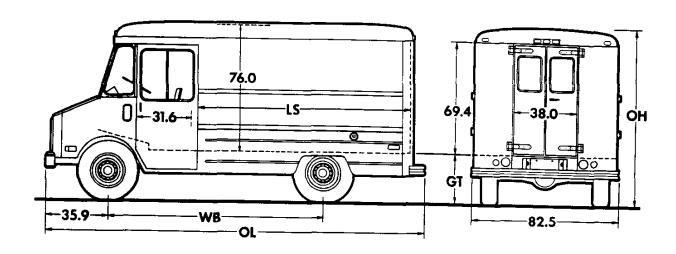

Series	Gro Clearan	und ce (in)*
	Front	Rear
P2	8.5	6.9
P3	8.8	7.2


Model	Engine No. Cyl.				Curb	Weigh	t (1b)	Model	Weigh	t (1 <b>b)</b> †	Body-P Wt. 1			
		WB	OL	LS	OH	GT	Front	Rear	Total	Front	Rear	Total	% Front	% Rear
					<b>■P20</b>	/250	O SER	IES					·	
P20842	6	125	226.8	128	109.5	26.9	3137	3094	6231	2040	2105			
P21042	6	133	250.8	152	109.5	26.7	3244	3248	6492	3246 3356	3135 3286	6381 6642	9	91
					P30/	3500	SERI		1 0432	3330	3200	0042	<u> </u>	94
P30842	6	125	226.8	128	109.5				1	<del></del> _				
P31042	<del>- 5</del>	133	250.8	152		27.2	3147	3210	6357	3256	3251	6507	9	91
P31442	6	157	274.8	132	109.5	27.2	3258	3369	6627	3370 l	3407	6777	6	94

\*Dimensions with standard equipment, unloaded.
†Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.
\*Estimate based on water-level loading.
■P20/2500 models not available for registration in the State of California.

GASOLINE

### STEP-VAN/VALUE VAN STEP-VAN/VALUE VAN—ALUMINUM BODY

Body Ordering Code—E33

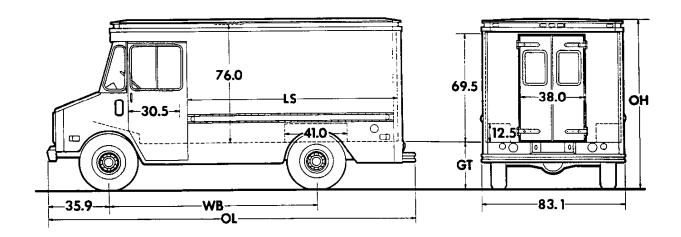

Series	Gro Clearan	und ce (in)★
	Front	Rear
P20	8.5	6.9
P30	8.5	7


<b>16</b> -4-1	Engine					Curb	Weigh	t (lb)	Model	l Weigh	t (1b)†	Body-P Wt.	ayload Dist:	
Model	No. Cyl.	WB	OL	LS	OH	GT	Front	Rear	Total	Front R	Rear	Total	% Front	% Rear
					20/2	500	SERIES	5						
P20842	6	125	226.8	129.6	110.0	27.4	2347	2492	4839	2456	2533	4989	9	91
P21042	6	133	250.8	153.6	110.0	27.2	2421	2507	4928	2533	2545	5078	6	94
		_		P	30/3	500 9	SERIES	,						
P30842	6	125	226.8	129.6	110.0	27.8	2357	2620	4977	2466	2661	5127	9 _	91
P31042	6	133	250.8	153.6	110.0	27.8	2435	2640	5075	2547	2678	5225	6	94
P31442	6	157	274.8	177.6	110.0	27.7	2553	2876	5429	2671	2908	5579	12	88
P31842	6	178	316.7	219.6	110.0	27.5	2706	3357	6063	2818	3395	6213	10	90

<sup>\*</sup>Dimensions with standard equipment, unloaded.
†Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.
•Estimate based on water-level loading.
■P20/2500 models not available for registration in the State of California.

#### DIESEL

### STEP-VAN/VALUE VAN STEP-VAN/VALUE VAN-ALUMINUM BODY

Body Ordering Code - E33

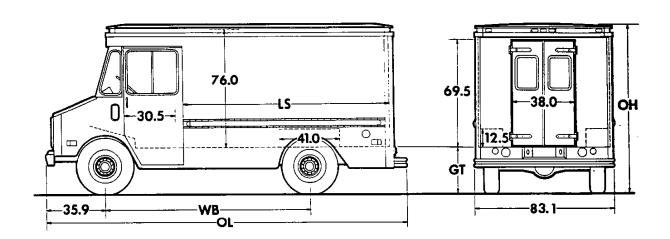

Series		und ce (in)★
	Front	Rear
P20	8.5	6.9
P30	8.5	7

Model	Engine	Dimensions (in)★				Curb Weight (lb)			Model Weight (lb)†			Body-Payload Wt. Dist:		
wodei	No. Cyl.	WB	OL	LS	OH	GT	Front	Rear	Total	Front	Rear	Total	% Front	% Rear
	· • · ·		·····	•	20/2	500	SERIES	<u> </u>						
P20842	8	125	226.8	129.6	110.0	27.4	2755	2443	5198	2864	2484	5348	9	91
P21042	8	133	250.8	153.6	110.0	27.2	2828	2458	5286	2940	2496	5436	6	94
				P	30/3	500 S	ERIES	;						
P30842	8	125	226.8	129.6	110.0	27.8	2765	2571	5336	2874	2612	5486	9	91
P31042	8	133	250.8	153.6	110.0	27.8	2842	2591	5433	2954	2629	5583	6	94
P31442	8	157	274.8	177.6	110.0	27.7	2969	2828	5797	3087	2860	5947	12	88
P31842	8	178	316.7	219.6	110.0	27.5	3108	3420	6528	3220	3458	6678	10	90

 <sup>★</sup>Dimensions with standard equipment, unloaded.
 †Model Weight includes Curb Weight plus occupants (standard seating capacity x 150 lb). Total Model Weight may vary as much as ±50 lbs. to allow for production build variation.
 \*Estimate based on water-level loading.
 ■P20/2500 models not available for registration in the State of California.

## STEP-VAN/VALUE VAN

**POWER TEAMS** 

### **ALL STATES EXCEPT CALIFORNIA**

#### **P20/2500 SERIES**

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

#### W/NA5 STANDARD OR NA6 HIGH ALTITUDE EMISSION EQUIPMENT

ENGINE	TRA	ANSMISSION		AXLES		
	4-SP	AUTO	3.73	*4.10	GVWR	
#L25 L6 4.8 Liter (292-18BL)	MM4		GQ1	*GT5	6800	
<u> </u>	MM4			*GQ1	75/8000	
LT9 V8 5.7 Liter (350-4 BBL)	MM4	MX1	GQ1	*GT5	ALL	
LL4 Diesel	MM4	MX1	GQ1	*GT5	6800	
6.2 Liter V8 (379 Cu. In.)(Regs 83J)	MM4	MX1	601	*GT5	7500	
foxo on millineda pool	MM4	MX1	GQ1	*GT5	8000	

#### P30/3500 SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE) (Consult GVWR Selector and Tire Chart to insure tire capacity and availability)

ENGINE	7	RANSMISSION						
	4-SP	AUTO	3.73	*4.10	4.56	LES *5.13	1 *5 20	#GVWR
\$L25 L6	MM4		3.73			-9.13	*5.29	
4.8 Liter		MX1		*GT5	GQ1			7600
(292-18BL)	MM4	MX1			G <b>Q</b> 1	l -		8200
	MM4	MX1	_	-	GQ1	T		9000
	MM4	MX1			HC4	*GQ1		**9000
	MM4	MX1		_	HC4	*GQ1		10000
	MM4	MX1			_	*GQ1	<del>                                     </del>	11500
SLT9 V8	MM4	MX1	GQ1	*GT5		-	<del>  _  </del>	76/8200
5.7 Liter (350-48BL)	MM4	MX1		*GQ1	HC4	<b> </b>	<del>! _  </del>	9/10000
(000 4002)	MM4	MX1			GQ1	<del> </del>	<del>  _   -   -   -   -   -   -   -   -   - </del>	11500
	MM4	MX1					\$HA3	12/14000
<del>-</del>	MM4	MX1	_	_	-	<del>  _</del>	\$HA3	14500
■LL4 Diesel	MM4	MX1	G <b>Q</b> 1	*GT5			1 - 1	7600
6.2 Liter V8 (379 Cu. In.)(Regs B3J)	MM4	MX1		*GQ1	HC4		† <u>-</u> "   -	8200
to a committeed pool	MM4	MX1		*GQ1	HC4	<del>   </del>	<del>  _                                   </del>	9/10000
	MM4	MX1		_	GQ1	*HC7	1 _ 1	11500
	MM4	MX1			1		*HA3	12/14000
	MM4	MX1				<del>  _</del>	*HA3	14500

<sup>#</sup>Consult GVWR Selector for availability and restrictions
\*N/A G80 Locking Differential

A. 17 2. 4.

<sup>\*</sup>N/A G80 Locking Differential #N/A NA6 High Altitude Emissions. With NA5 Emissions Satisfies High Altitude Requirements

<sup>\*\*</sup>Regs RO5 Wheels

SN/A 680 Locking Differential. (Regs KC4 Cooler)
(w/MM4 Trans Regs VO1 Cooling System)
SSN/A NA6 High Altitude Emissions. With NA5 Emissions Satisfies High Altitude Requirements

High Attitude Emission Equipment (FOR EXHAUST SMOKE REDUCTION PURPOSES AT HIGH ALTITUDE; NOT REQUIRED TO SATISFY HIGH ALTITUDE EMISSION REGULATIONS).

### STEP-VAN/VALUE VAN

### **POWER TEAMS CALIFORNIA ONLY**

#### P30/3500-SERIES

POWER TEAMS (MUST ORDER ENGINE, TRANSMISSION AND REAR AXLE)
(Consult GVWR Selector and Tire Chart to insure tire capacity and availability)
W/YF5 CALIFORNIA EMISSIONS

ENGINE		RANSMISSION			AX	LES		#GVWR
	4-SP	AUTO	3.73	*4.10	4.56	*5.13	*5.29	
\$L25 L6	MM4	MX1	_	*GT5	GQ1	_	_	7600
4 8 Liter (292-188L)	MM4	MX1	_	_	GQ1	_	_	8200
(232-1860)	MM4	MX1		_	GQ1	_		9000
	MM4	MX1	_		HC4	*GQ1		**9000
	MM4	MX1	_	_	HC4	*GQ1		10000
	MM4	MX1	_	_	_	*G01	_	11500
\$LT9 V8	MM4	MX1	GQ1	*GT5	_		-	76/8200
5 7 Liter (350-48BL)	MM4	MX1	_	*GQ1	HC4	_	_	9/10000
(330-4882)	MM4	MX1	_		GQ1	_	_	11500
	MM4	MX1				-	\$HA3	12/14000
	MM4	MX1		_			\$HA3	14500
LL4 Diesel	MM4	MX1	GQ1	*GT5	_	_	-	7600
6.2 Liter V8 (379 Cu. In)(Regs 83J)	MM4	MX1	_	*GQ1	HC4	_	_	8200
(373 Ca. in Aireda 533)	MM4	MX1		*GQ1	HC4	_	T - T	9/10000
	MM4	MX1		_	GQ1	*HC7	_	11500
	MM4	MX1	_	_	_	-	*HA3	12/14000
	MM4	MX1	_			_	*HA3	14500

### **ENGINE RATINGS**

### **ALL STATES EXCEPT CALIFORNIA**

SAE Net Ratings	4.8 Liter	5.7 Liter	6.2 Liter
	292 1-bbl L6	350 4-bbl V8	379 V8 Diesel
Net Horsepower	115 @ 3600 rpm	160 @ 3800 rpm	135 @ <b>3600</b> rpm
Net Torque, lb-ft	215 @ 1600 rpm	250 @ 2800 rpm	240 @ <b>2000</b> rpm

#### **CALIFORNIA ONLY**

SAE Net Ratings	4.8 Liter	5.7 Liter	6.2 Liter
	292 1-bbl L6	350 4-bbl V8	379 V8 Diesel
Net Horsepower	115 @ 3600 rpm	155 @ 4000 rpm	135 @ 3600 rpm
Net Torque, lb-ft	215 @ 1600 rpm	240 @ 2800 rpm	240 @ 2000 rpm

<sup>#</sup>Consult GVWR Selector for availability and restrictions
\*N/A G80 Locking Differential
\*\*Reqs R05 Wheels
\$N/A G80 Locking Differential. (Reqs KC4 Cooler)
(w/MM4 Trans Reqs V01 Cooling System)
\$\$N/A NA6 High Altitude Emissions. With NA5 Emissions
Satisfies High Altitude Requirements

### STEP-VAN/VALUE VAN **GVWR SELECTOR—ALL STATES EXCEPT CALIFORNIA**

#### P20/2500 SERIES (NOT AVAILABLE IN CALIFORNIA)

GVW	†GAW	R (lbs)	Mir	imum Equipment	Required for GVW Rating	
Rating			Tire Capac			
(lbs)	Front	Rear	Front	Rear	Chassis Equipment	
●6800	3600	3880	1940	1940	Standard	
7500	3880	4630	1940	2315		
8000	4000	5246	2623	2623	HD Rear Springs (G50); HD Power Brakes (J55)	

<sup>†</sup>GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

Not available when E32 steel body is ordered with LL4 Diesel engine.

# FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES EXCEPT CALIFORNIA

#### Spare tire to match either front or rear tires available at extra cost **P20/2500 SERIES**

Description	Capacity	Hig	hway	On-Off Road		
	(lbs ea)	Front	Rear	Rear	Spare	
TUBELESS			<u> </u>			
LT215/85R16C	1940	XYJ	●YYI		●ZYJ	
LT215/85R16C	1940	XYJ		<del></del>		
LT215/85R16D	2315	_	YYK	_	ZYK	
	i	_	-"	YYL	ZYL	
				YYL	ZYK	
LT215/85R16D	2315	XYK	YYK	_	ZYK	
		<del>-</del> -	-	YYL	ZYL	
LT235/85R16D	2623			YYL	ZYK	
TUBE-TYPE	2023	MYX	MYY		ZYM	
7.50-16C	2060	XPB	●YPB	_	ZPB	
7.50-16C	2060	XPB				
7.50-16D	2440	_	YPF		ZPF	
	1	_		YPG	ZPG	
R 50 400		_	-	YPG	ZPF	
7.50-16E	2780	_	YPK		ZPK	
7.50-16D	2440	XPF	YPF		ZPF	
	1	-	-	YPG	ZPG	
2 50 100				YPG	ZPF	
7.50-16E	2780	XPK	YPK	_	ZPK	

Not available when E32 steel body is ordered with LLA Diesel engine.

1811

### STEP-VAN/VALUE VAN

#### GVWR SELECTOR—ALL STATES

	-GAW	R (1hs)	Min	imum Equipment	Required for GVW Rating
GVW Rating			Tire Capa	city (lbs ea)	Chassis Equipment
(lbs)	Front	Rear	Front	Rear	Chassis Equipment
	<u></u>	Р	30/3500 SE	RIES	
<b>• 7600</b>	3880	4630	1940	2315	Standard
+ 8200	4000	5246	2623	2623	Standard
●9000	4000	6084	3042	3042	HD Power Brakes (J55)
●9000	3880	6200	1940	1764 (Dual)	Dual Rear Wheel Provisions (R05), HD Power Brakes (J55)
10,000	3880	7056	1940	:764 (Dual)	Dual Rear Wheel Provisions (R05) HD Rear Springs (G60); HD Power Brakes (J55)
10,000	3880	7056	1940	1764 (Dual)	Standard for P31842 only
●11,500	3880	7900	1940	2105 (Dual)	Dual Rear Wheel Provisions (R05) HD Rear Springs (G60); School Bus Chassis Equipment (B3
±12,000	4500	9840	2800	2460 (Dual)	11,000 lb Rear Axle (HA3)
±14,000	4500	11,000	2800	2780 (Dual)	11,000 lb Rear Axie (HA3)
±14,500	4500	11,000	2800	2780 (Dual)	11,000 lb Rear Axle (HA3); School Bus Chassis Equipment (B3)

<sup>+</sup>GAWR's shown are the maximum for each axle with equipment listed. Other GAWR's are available, and they are determined as the minimum capacity of either axle, springs or tires.

‡Requires V8 engine. • Not available in California or on model P31842. • Not available on model P31842.

#### FRONT AND REAR TIRE AVAILABILITY CHART—ALL STATES Spare tire to match either front or rear tires available at extra cost P30/3500 SERIES

	Capacity (lb	s each)		Highway		On-Off	Road	
Description	Front/ Single Rear	Dual Rear	Front	Single Rear	Dual Rear	Single Rear	Dual Rear	Spare
TUBELESS With 7900-lb Rear Ax	le							
LT215/85R16C	.940	1764	XYJ	_	YYJ			ZYJ
LT215/85R16C	1940	_	XYJ	_	- 1	_	-	-
LT215/85R16D	_	2105	- - -	_ _ AAK	YYK - -	YYL YYL	YYL YYL	ZYK ZYL ZYK
LT215/85R16D	2315	_	XYK	-	-		-	ZYK
LT215/85R16C		1764	1 –	-	YYJ _			ZYK
LT215/85R16D	2315	2105	XYK - -	YYK - -	YYK   - -	YYL YYL	YYL YYL	ZYK ZYL ZYK
LT235/85R16D	2623	_	MYX	YYM	_	-		ZYM
LT235/85R16D	2523		XYM	_			-	-
LT235/85R16E	3042		1 –	YYN	-			ZYN
LT235/85R16E	3042	_	XYN	YYN				ZYN
'8-19.5D	2800	2460	XSF	_	YSF	-		ZSF
					_	_	YSE YSE	ZSE ZSF
TUBE-TYPE With 7900-lb Rear Av	<b>xle</b> 2060	1815	XPB	1 _	YPB		1	ZPB
7.50-16C	2060	- 1015	XPB		<u> </u>		<del>  _</del> -	
7.50-16C	2440	2140		YPF	YPF	_	_	ZPF
7.50-16D	2440	2140		=		YPG YPG	YPG YPG	ZPG ZPF
7.50-16E	2780		]	YPK	·		-	ZPK
7.50-16D	2440	2140	XPF	YPF	YPF		YPG	ZPF ZPG
			1 _	1 =		YPG YPG	YPG	ZPF
7.50-16C		1815	<del>-</del>	_	YPB	_	-	ZPF
7.50-16D	2440		XPF		<del>                                     </del>			
7.50-16E	2780		1	YPK	_	-	! –	ZPK
7.50-16D Polyester	2440	2140	XPE	YPE	YPE		-	ZPE
7.50-16E	2780	-	XPK	YPK	-		-	ZPK
TUBELESS With 11,000-lb Rear	Axle		<u> </u>				<u></u>	
*8-19.5D	2800	2460	XSF		YSF	-	YSE	ZSF ZSF
		<u> </u>		-	_	-	YSE	ZSI
#8-19.5E		2780		_	YSG			ZSC
#8-19.5E	3170	2780	XSG	_	YSG	_	1 –	ZSC

\*Requires GQ1 axie with L25 engine. #Requires HA3 5.29 rear axie ratio.

### STEP-VAN/VALUE VAN

# THE FOLLOWING EQUIPMENT IS STANDARD ON DIESEL ENGINE MODELS (ALSO SEE STANDARD SPECIFICATIONS PAGES)

- Low Coolant Sensor
- Poly-wrapped Paper Element Air Cleaner
- Auxiliary Engine Oil Cooler (in addition to cooler in radiator tank) provided with 5.13 or 5.29 ratio rear axle on P30/3500 models only
- Power Steering
- Engine Block Heater
- Water/fuel separator unit which incorporates a water sensor and sending unit, a fuel filter, a fuel heater and water drain capability
- Hydraulic Power-assisted Brakes
- K81 66-amp Generator
- Engine Oil Cooler (located in radiator tank)
- Dual 550 Cold Cranking Amp/115 min. Reserve Capacity Batteries
- HD Radiator
- Dual Exhaust System
- Additional Insulation (on Van models only):
  - Special engine housing cover with triple layer inner insulator and single piece rubber floor seal
  - -Fiberglass dash mat
  - -Black rubber mats on dash and floor panel
  - -Perforated driver compartment headliner with fiberglass backing
  - -Fiberglass front quarter panel insulation
  - -Additional body sealing measures
- Warning Lights: Glow Plugs, Water-in-fuel (or fuel filter), and Low Coolant
- Diesel Engine Identification:
  - -Nameplate on rear door
  - -"Diesel Fuel Only" filler cap and label

### STEP-VAN/VALUE VAN OR F.C. CHASSIS (6800-lb - 10,000-lb GVW)

For P3 Series equipped with 11,000-lb rear axle or B3D see pages entitled:

\*P3 SERIES STEP-VAN/VALUE VAN AND F.C. CHASSIS (12,000-lb-14,000-lb GVW) or P3 Series F.C. Chassis with B3D School Bus Chassis (11,500-lb-14,500-lb GVW)\*

#### 1984 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with vehicles produced on and after February 13, 1984

	Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price+	Group Number
٠		ter (292 Cu	. ln.) 1	BBL L6 Gasoline	Engine—Engine Or	dering C	ode L25	
	P20/P2500 Series							
••	Step-Van/Value Van	OD (TD00040						
	Steel (10 1/2 ft) F.C. Chassis		E32 ZW9	125* 125*	.20 .20	12698.00 7479.00	12698.20 7479.20	15 14
••	Step-Van/Value Van	CP/1720042	2443	125	.20	7479.00	7479.20	14
	Aluminum (10 1/2 ft)	CD/TD20042	E33	125*	.20	14570.00	14530.30	
	Step-Van/Value Van	CF/1F20042	E33	125	.20	14570.00	14570.20	15
	Steel (12 1/2 ft)	CD/TD21042	E32	133*	.20	12966.00	12966.20	15
	F.C. Chassis	CP/TP21042	ZW9	133*	.20	7542.00		14
••	Step-Van/Value Van	,			.20	. 0 12.00	, 542.20	
	Aluminum (12 1/2 ft)	CP/TP21042	E33	133"	.20	15073.00	15073.20	15
	P30/P3500 Series	.,						
	Step-Van/Value Van							
	Steel (10 1/2 ft)	CP/TP30842	E32	125*	.30	12777.00	12777.30	15
	F.C. Chassis		ZW9	125*	.30	7558.00		14
••	Step-Van/Value Van	•						
	Aluminum (10 1/2 ft)	CP/TP30842	E33	125*	.30	14649.00	14649.30	15
••	Step-Van/Value Van							
	Steel (12 1/2 ft)		E32	133*	.30	13046.00		15
	F.C. Chassis	CP/TP31042	ZW9	133″	.30	7622.00	7622.30	14
••	Step-Van/Value Van							
	Aluminum (12 1/2 ft)	CP/TP31042	E33	133*	.30	15153.00	15153.30	15
••	Step-Van/Value Van							
	Steel (14 1/2 ft)		E32	157*	.30	13288.00		15
	F.C. Chassis	CP/TP31442	ZW9	157*	.30	7686.00	7686.30	14
••	Step-Van/Value Van	CD/TD24442	E33	157*	30	15672.00	15070.00	4-
	Aluminum (14 1/2 ft) F.C Chassis	CP/TP31442 CP/TP31842	ZW9	178"	.30 .30	15672.00 9055.00		15 14
	Step-Van/Value Van	GF/1F31042	4442	1/0	.30	3055.00	9099.30	14
	Aluminum (18 ft)	CP/TP31842	E33	178*	.30	18004.00	18004.30	15

<sup>★</sup> Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or accessories or special items or services.

#### MODELS CONTINUED ON FOLLOWING PAGE

<sup>♦</sup> Refer to Dealer Order Guide for California Requirements.

<sup>\*\*</sup> Van models will be shipped to Union City Body Co. where all body work will be done. These units will be serviced and conditioned for highway travel after body is installed.

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

### 1984 VFHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with vehicles produced on and after February 13, 1984

							Mfr's Suggested	
_	Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Retail Price★	Group Number
	8-Cylinder 6.2 I	itar /279 C		Dincol F:	Frankrica O. I. i			
•	P20/P2500 Series	101 (373 6	u. 111./ 11.D 1	Diesei Engine	Engine Ordering Co	ode LL4		
	Step-Van/Value Van							
				_				
	Steel (10 1/2 ft)			125"	.30	15090.00	15090.30	15
	F.C. Chassis	•	ZW9 & B3J	125"	.20	9635.00	9635.20	14
•	Step-van/value van							
	Aluminum (10 1/2 ft)		E33 & B3J	125"	.20	16912.00	16912.20	15
••	Step-Van/Value Van							
	Steel (12 1/2 ft)		E32 & B3J	133"	.30	15356.00	15356.30	15
	F.C. Chassis	CP/TP21042	ZW9 & B3J	133"	.20	9697.00	9697.20	14
••	Step-Van/Value Van				.20	3037.00	3037.20	14
	Aluminum (12 1/2 ft)	CP/TP21042	E33 & B3J	133*	.20	17410.00	17410.20	
	P30/P3500 Series				.20	17410.00	17410.20	15
••								
	Steel (10 1/2 ft)		E32 & B3J	105-				
	F.C. Chassis		ZW9 & B3J	125*	.30	15136.00	15136.30	15
		,	ZWA & B21	125*	.30	9713.00	9713.30	14
	Aluminum (10 1/2 ft)		E33 & B3J	125*	.30	16990.00	16990.30	15
	Step-Van/Value Van							
	Steel (12 1/2 ft)		E32 & B3J	133*	.30	15403.00	15403.30	15
	F.C. Chassis		ZW9 & B3J	133*	.30	9776.00	9776.30	14
••	Step-Van/Value Van						0.70.00	
	Aluminum (12 1/2 ft)	CP/TP31042	E33 & B3J	133*	.30	17489.00	17489.30	15
••	Step-Van/Value Van				.50	. , 403.00	17405.30	10
	Steel (14 1/2 ft)	CP/TP31442	E32 & B3J	157*	.30	15642.00	15642.30	
	F.C. Chassis	CP/TP31442		157*	.30	9840.00		15
••	Step-Van/Value Van	,	<del></del>		.30	3040.00	9840.30	14
	Aluminum (14 1/2 ft)		E33 & B3J	157*	22	10000 00	10000 00	
	F.C Chassis			178*	.30	18003.00	18003.30	15
••	Step-Van/Value Van			.,,	.30	11042.00	11042.30	14
	Aluminum (18 ft)		E33 & B3J	178*				
_	(1011)	,	233 0 033	170	.30	20159.00	20159.30	15

<sup>★</sup> Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or accessories or special items or services.

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price⇔
Emission Systems: Dealer Note - One of the following emission options must be specified. (See Power Teams Chart		···		
for availability and complete specifications).				
California Emission Requirements. P3 Series only, Includes all				
testing, equipment and/or certification necessary for				
registration in the State of California. Available only when				
9000-lb GVWR or greater is achieved				
Without B3J Diesel Equipment	YF5	N.A.	235.00	235.00
With B3J Diesel Equipment	YF5	N.A.	235.00	235.00
High Altitude Emission Equipment. Available only when B3J Diesel Equipment is specified. Not available when YF5				
California Emissions or NA5 Standard Emission				
Requirements is specified	NA6	NO ADDITIONAL	0114000	-
Standard Emission Equipment. Not available when NA6 High	,,,,	NO ADDITIONAL	CHARGE	
Altitude or YF5 California Emission Requirements are				
specified	NA5	NO ADDITIONAL	CHARGE	•

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

<sup>♦</sup> Refer to Dealer Order Guide for California Requirements.

Van models will be shipped to Union City Body Co. where all body work will be done. These units will be serviced and conditioned for highway travel after body is installed.

# OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Asies Manual N.A. 492.00 Aspead Manual MM4 NO ADDITIONAL CHARGE Axies, Restr. (See Power Teams Chart for option number selection, availability and complete specifications) Optional Ratio	Complete specifications) Gasoline.  4.8 Liter (292 Cu. In.) 1 BBL L6  5.7 Liter (350 Cu. In.) 4 BBL V8  Diesel.  6.2 Liter (379 Cu. In.) H.D. V8 Diesel. Available only when B3J Diesel Equipment is specified  Transmissions: 3-Speed Automatic. Includes extra cooling. P2 Series only	LT9	NO ADDITIONAL		
Jasonine.  4.8 Liter (292 Cu. In.) 1 BBL L6  4.8 Liter (292 Cu. In.) 1 BBL L6  5.7 Liter (350 Cu. In.) 4 BBL V9  L19  N.A. 500.00  Jossel.  5.7 Liter (379 Cu. In.) H.D. V8 Diesel. Available only when 83.1 Diesel Equipment is specified  L14  NO ADDITIONAL CHARGE  Fransmissions:  1.5 Speed Automatic. Includes extra cooling. P.2 Series only.  MX1  N.A. 492.00  MX1  N.A. 49	Complete specifications) Gasoline.  4.8 Liter (292 Cu. In.) 1 BBL L6	LT9		. CHARGE	
### 1.25	4.8 Liter (292 Cu. In.) 1 BBL L6 5.7 Liter (350 Cu. In.) 4 BBL V8 Diesel. 6.2 Liter (379 Cu. In.) H.D. V8 Diesel. Available only when 83J Diesel Equipment is specified Fransmissions: 3-Speed Automatic. Includes extra cooling. P2 Series only	LT9		CHARGE	
5.7 Liter (350 Cu. In.) 4 BBL V8	5.7 Liter (350 Cu. In.) 4 BBL V8 Diesel. 6.2 Liter (379 Cu. In.) H.D. V8 Diesel. Available only when B3J Diesel Equipment is specified  Transmissions: 3-Speed Automatic. Includes extra cooling. P2 Series only	LT9		CHARGE	
B3J Diesel Equipment is specified LL4 NO ADDITIONAL CHARGE Transmissions:  3-Speed Automatic. Includes extra cooling. P2 Series only MX1 N.A. 492.00 492.00 P3 Series only MX1 N.A. 492.00 492.00 Axles, Rear: (See Power Teams Chart for option number selection, availability and complete specifications) Diptional Ratio. Society of the Cooling of the Coo	6.2 Liter (379 Cu. In.) H.D. V8 Diesel. Available only when B3J Diesel Equipment is specified.  Transmissions: 3-Speed Automatic. Includes extra cooling. P2 Series only			500.00	500.00
B3J Diesel Equipment is specified LL4 NO ADDITIONAL CHARGE Transmissions: 3-Speed Automatic. Includes extra cooling. P2 Series only. MX1 N.A. 492.00 492.00 P3 Series only. MX1 N.A. 492.00 492.00 Axles, Rear: (See Power Teams Chart for option number electrion, availability and complete specifications) Optional Ratio. N.A. 36.00 36.00 Locking Differential See Reage equipped with 11.000-lb rear axie, see pages entitled: 'P3 Series Step-Van/Value Van or F.C. Chassis (11,500-lb-14,500-lb GWW), or P3 Series F.C. Chassis with 83D School Bus Chassis (11,500-lb-14,500-lb GWW) Tires: (See Tire Charts for Tire Availability) All rim sizes are 6.00° on P3 Series with 80D Dual Rear Wheels Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels Wheels Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels Complete Specifications and ordering information, see "OTHER OPTIONS" Section. TUBELESS T.7215-88816-C Steel Belted Radial Ply Blackwall Maximum Capacity Front and Single Rear 1940-lbs) (Maximum Capacity Front and Single Rear 1940-lbs) (Maximum Capacity Front and Single Rear 1940-lbs) (Maximum Capacity Dual Rear 1764-lbs) Front P2 Series (Stendard) XYJ NO ADDITIONAL CHARGE P3 Series without R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series without R05 Dual Rear Wheels except P31842 XYJ NO ADDITIONAL CHARGE P3 Series and P31842 only (Standard) Notavailable on E32 Steel Body when B3J Diesel Equipment is specified P3 Series only Not available on E32 Steel Body when B3J Diesel Equipment is specified P3 Series only Not available on E32 Steel Body when B3J Diesel Equipment is specified P3 Series only Not available on E32 Steel Body when B3J Diesel Equipment is specified	83. Diesel Equipment is specified  Transmissions:  3-Speed Automatic. Includes extra cooling. P2 Series only				000.00
Transmissions: P2 Series only MX1 N.A. 492.00 492.00 P3 Series only N.A. 36.00 36.00 P3 Series only MX1 N.A. 36.00 36.00 P3 Series only N.A. 36.00 36.00 P3 Series only N.A. 230.00 230.00 P3 Series onl	3-Speed Automatic. Includes extra cooling. P2 Series only	LL4	NO ADDITIONAL	CHARGE	
P2 Series only.  MX1  MX1  N.A. 492.00  492.00  492.00  492.00  Axies, Rear: (See Power Teams Chart for option number releaction, availability and complete specifications)  **Ditional Ratio.  **Optional Ratio.  **Cocking Differential  **Capacity 11,000-lb. For P3 Series equipped with 11,000-lb GVW, or P3 Series F.C. Chassis with 830 School Bus Chassis (11,500-lb-14,500-lb GVW, or P3 Series F.C. Chassis with 830 School Bus Chassis (11,500-lb-14,500-lb GVW).  **Tires: (See Tire Charts for Tire Availability)  **All rim sizes are 6,50° on P2 Series and P3 Series without R05  **Dual Rear Wheels.**  **All rim sizes are 6,00° on P3 Series with R05 Dual Rear Wheels will be applied to the order. Fills EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  **For complete specifications and ordering information, see "OTHER OPTIONS" Section.**  **Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels will be applied to the order. Fills EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  **For complete specifications and ordering information, see "OTHER OPTIONS" Section.**  **P3 Series Series With R05 Dual Rear Wheels (Standard).**  **Tibeless**  **T215-85R16-C Steel Belted Radial Ply Blackwall Maximum Capacity Front and Single Rear 1940-lbs)  **(Maximum Capacity Dual Rear 1764-lbs)**  **Fort**  **P2 Series (Standard).**  **P3 Series with R05 Dual Rear Wheels (Standard).**  **XYJ.**  **NO ADDITIONAL CHARGE P3 Series without R05 Dual Rear Wheels except P31842.**  **XYJ.**  **NO ADDITIONAL CHARGE P3 Series without R05 Dual Rear Wheels (Standard).**  **XYJ.**  **NO ADDITIONAL CHARGE P3 Series without R05 Dual Rear Wheels (Standard).**  **XYJ.**  **NO ADDITIONAL CHARGE P3 Series without R05 Dual Rear Wheels (Standard).**  **XYJ.**  **NO ADDITIONAL CHARGE P3 Series B04 when B3J Diesel Equipment is specified.**  **P3 Series only Not available on E32 Steel B04 when B3J Diesel Equipment is specified.**  **P3 Series only Not available on E3	P2 Series only		No Noomal	VIIAIIGE	
P3 Series only MX1 AA 492.00 AXIes, Rear: (See Power Teams Chart for option number selection, availability and complete specifications) Optional Ratio	P3 Series only				
Asles, Resir. (See Power Teams Chart for option number selection, availability and complete specifications)  Optional Ratio. N.A. 36.00 36.00 (Section N.A. 230.00 230.00 (Section N.A. 230.00 (Section N.A. 230.00 230.00 (Section N.A.				492.00	492.00
Axles, Rear: (See Power Teams Chart for option number selection, availability and complete specifications)  Optional Ratio	4-Speed Manual				492.00
patention, availability and complete specifications)  Optional Ratio.  Occlapacity 11.000-lb. For P3 Series equipped with 11.000-lb rear axie, see pages entitled: "P3 Series Step-Van/Value Van or F.C. Chassis (11.500-lb-14.500-lb GVW), or P3 Series F.C. Chassis with 830 School Bus Chassis (11.500-lb-14.500-lb GVW)'  Fires: (See Tire Charts for Tire Availability)  All rim sizes are 6.50° on P2 Series and P3 Series without R05 Dual Rear Wheels.  All rim sizes are 6.00° on P3 Series with R05 Dual Rear Wheels.  Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels will be applied to the order.  FIFIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS  T2.15.85816-C Steel Belted Radial Ply Blackwall Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  Front  P2 Series (Standard). XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Palea Wheels XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Palea XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Series With R05 Dual Rear Wheels XYJ NO ADDITIONAL CHARGE P3 Series and P3 1842 only (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ NO ADDITIONAL CHARGE P3 Series only Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ Not available on E32 Steel Body wh		******	NO ADDITIONAL	CHANGE	
G80  N.A. 230.00 230.00  Zapacity 11.000-lb. For P3 Series equipped with 11.000-lb rear axie, see pages entitled: 'P3 Series Step-Van/Value Van or F.C. Chassis (11,500-lb. 14,500-lb GVW), or P3 Series F.C. Chassis with B3D School Bus Chassis (11,500-lb-14,500-lb GVW).  Fires: (See Tire Charts for Tire Availability)  All rim sizes are 6.50° on P2 Series and P3 Series without R05  Dual Rear Wheels.  All rim sizes are 6.00° on P3 Series with R05 Dual Rear Wheels will be applied to the order.  Fires: When dual rear tires are specified. R05 Dual Rear Wheels will be applied to the order.  FIRIS GOUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see 'OTHER OPTIONS' Section.  FIRIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION and WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see 'OTHER OPTIONS' Section.  FUBELESS  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front Bob Dual Rear Wheels (Standard)	selection, availability and complete specifications)				
Locking Differential G80  N.A. 230.00  230.00  Capacity 11,000-lb. For P3 Series equipped with 11,000-lb rear axle. see pages entitled: P3 Series Step-Van/Value Van or F.C. Chassis (11,500-lb-14,500-lb GVW), or P3 Series F.C. Chassis with B3D School Bus Chassis (11,500-lb-14,500-lb GVW)*  Tires: (See Tire Charts for Tire Availability)  All rim sizes are 6.50* on P2 Series and P3 Series without R05  Dual Rear Wheels.  All rim sizes are 6.00* on P3 Series with R05 Dual Rear Wheels will be applied to the order.  THIS COUPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS  LT215-88718-C Steel Belted Radial Ply Blackwall  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Dual Rear 1764-lbs)  Front  P2 Series (Standard)  P3 Series with R05 Dual Rear Wheels (Standard)  XYJ  NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels except P31842  XYJ  NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels except P31842  XYJ  NO ADDITIONAL CHARGE P3 Series and P31842 only (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified  YYJ  NO ADDITIONAL CHARGE YYJ  Spare Available on Step-Van/Value Van only when P14 or P15 Spare Wheel Carrier is specified  YYJ  No ADDITIONAL CHARGE YYJ  Spare Spare Wheel Carrier is specified	Optional Ratio		N.A.	36.00	36.00
Capacity 11,000-lb. For P3 Series equipped with 11,000-lb rear axie, see pages entitled: 'P3 Series Step-Van/Value Van or F.C. Chassis (11,500-lb 14,500-lb GVW), or P3 Series F.C. Chassis with 83D School Bus Chassis (11,500-lb-14,500-lb GVW).  Tires: (See Tire Charts for Tire Availability) All rim sizes are 6.50° on P2 Series and P3 Series without R05 Dual Rear Wheels. All rim sizes are 6.00° on P3 Series with R05 Dual Rear Wheels will be applied to the order. THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY. For complete specifications and ordering information, see "OTHER OPTIONS" Section. TUBELESS LT215/88716-C Steel Belted Radial Ply Blackwall (Maximum Capacity Front and Single Rear 1940-lbs) (Maximum Capacity Front and Single Rear 1940-lbs) (Maximum Capacity Dual Rear Yheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series without R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series without R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series and P3 1842 only (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series Only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series Only NO ADDITIONAL CHARGE P3 Series Only NO ADDITIONAL CHARGE P3 YYJ NO ADDITIONAL CHARGE P3 YYJ NO ADDITIONAL CHARGE P3 YYJ NO AD	ocking Differential	G80			
or F.C. Chassis (1,1,500-lb-14,500-lb GVW), or P3 Series F.C. Chassis with 83D School Bus Chassis (11,500-lb-14,500-lb GVW)*  Tires: (See Tire Charts for Tire Availability) All rim sizes are 6.50° on P2 Series and P3 Series without R05 Dual Rear Wheels. All rim sizes are 6.00° on P3 Series with R05 Dual Rear Wheels.  Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels will be applied to the order. THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY. For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS LT215/85R16-C Steel Belted Radial Ply Blackwall Maximum Capacity Front and Single Rear 1940-lbs) (Maximum Capacity Dual Rear 1764-lbs) Front P2 Series (Standard). XYJ NO ADDITIONAL CHARGE P3-Series with R05 Dual Rear Wheels (Standard). XYJ NO ADDITIONAL CHARGE P3-Series with R05 Dual Rear Wheels except P31842 XYJ NO ADDITIONAL CHARGE Rear P2 Series and P31842 only, (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified. YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ No ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE					-50.00
Chassis with 830 School Bus Chassis (11,500-ib-14,500-ib GVW)*  Tires: (See Tire Charts for Tire Availability) All rim sizes are 6.50° on P2 Series and P3 Series without R05 Dual Rear Wheels.  All rim sizes are 6.00° on P3 Series with R05 Dual Rear Wheels.  Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels will be applied to the order.  THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS LT215/85R16-C Steel Belted Radial Ply Blackwall Maximum Capacity Front and Single Rear 1940-lbs) ((Maximum Capacity Funt and Single Rear 1940-lbs)  Front P2 Series (Standard) XYJ NO ADDITIONAL CHARGE P3-Series without R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3-Series with R05 Dual Rear Wheels except P31842 XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels except P31842 XYJ NO ADDITIONAL CHARGE Rear P2 Series and P31842 only. (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ No ADDITIONAL CHARGE P3 Series only Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ P3 Series only Not available on E32 Steel Body when	rear axie, see pages entitled: "P3 Series Step-Van/Value Van				
GVW!*  Tires: (See Tire Charts for Tire Availability)  All rim sizes are 6.50° on P2 Series and P3 Series with R05  Dual Rear Wheels.  All rim sizes are 6.00° on P3 Series with R05 Dual Rear  Wheels.  Dealer Note: When dual rear tires are specified, R05 Dual Rear Wheels will be applied to the order.  THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS  L7215/85R16-C Steel Belted Radial Ply Blackwall  Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Dual Rear 1764-lbs)  Front  P2 Series (Standard) XYJ NO ADDITIONAL CHARGE  P3-Series with R05 Dual Rear Wheels (Standard) XVJ NO ADDITIONAL CHARGE  P3-Series with R05 Dual Rear Wheels except P31842 XYJ NO ADDITIONAL CHARGE  P3 Series with R05 Dual Rear Wheels except P31842 XYJ NO ADDITIONAL CHARGE  P3 Series only (Standard) XYJ NO ADDITIONAL CHARGE  P2 Series and P31842 only. (Standard) Not available on  E32 Steel Body when B3J Diesel Equipment is  specified YJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE  P3 Series only e	or F.C. Chassis (11,500-lb-14,500-lb GVW), or P3 Series F.C.				
All rim sizes are 6.50° on P2 Series and P3 Series without R05  Dual Rear Wheels.  All rim sizes are 6.00° on P3 Series with R05 Dual Rear Wheels.  Dealer Note: When dual rear tires are specified, R05 Dual Rear Wheels will be applied to the order.  THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS  LT215/85R16-C Steel Belted Radial Ply Blackwall Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  Front  P2 Series (Standard)  P3-Series with R05 Dual Rear Wheels (Standard)  P3-Series with R05 Dual Rear Wheels (Standard)  XYJ  NO ADDITIONAL CHARGE P3-Series with R05 Dual Rear Wheels except P31842  XYJ  NO ADDITIONAL CHARGE  Rear  P2 Series and P31842 only. (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified  YYJ  NO ADDITIONAL CHARGE  P3 Series only except P31842  YYJ  NO ADDITIONAL CHARGE  P3 Series only except P31842  YYJ  NO ADDITIONAL CHARGE  P3 Series only except P31842  YYJ  No ADDITIONAL CHARGE  P3 Series only except P31842  YYJ  No ADDITIONAL CHARGE  P3 Series only except P31842  YYJ  No ADDITIONAL CHARGE  P3 Series only except P31842  YYJ  No ADDITIONAL CHARGE  P3 Series only except P31842  YYJ  No ADDITIONAL CHARGE  P3 Series only except P31842  YYJ  Spare. Available on Step-Van/Value Van only when P14 or P15 Spare Wheel Carrier is specified  P2 Series only. Not available on E32 Steel Body when B3J Diesel Equipment is specified  P3 Series only.	GVW):				
All rim sizes are 6.50° on P2 Series and P3 Series with R05 Dual Rear Wheels.  All rim sizes are 6.00° on P3 Series with R05 Dual Rear Wheels.  Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels will be applied to the order.  THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS  LT215/85R16-C Steel Belted Radial Ply Blackwall (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  Front  P2 Series (Standard)					
Dual Rear Wheels.  All rim sizes are 6.00° on P3 Series with R05 Dual Rear Wheels will be applied to the order.  THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS  LT215/85R16-C Steel Belted Radial Ply Blackwall (Maximum Capacity Front and Single Rear 1940-lbs) (Maximum Capacity Dual Rear 1764-lbs)  Front  P2 Series (Standard)	All rim sizes are 6.50° on P2 Series and P3 Series without PAS				
Wheels.  Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels will be applied to the order.  THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS  LT215/85R16-C Steel Belted Radial Ply Blackwall  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  Front  P2 Series (Standard)	Dual Rear Wheels.				
Dealer Note: When dual rear tires are specified. R05 Dual Rear Wheels will be applied to the order.  THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS  LT215/85R16-C Steel Belted Radial Ply Blackwall  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Dual Rear 1764-lbs)  Front  P2 Series (Standard) XYJ NO ADDITIONAL CHARGE P3-Series without R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels except P31842 XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels except P31842 XYJ NO ADDITIONAL CHARGE P3 Series and P31842 only. (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ NO ADDITIONAL CHARGE P3 Series only Not available on E32 Steel Body when B3J Diesel Equipment is specified ZYJ Series only.	All rim sizes are 6.00° on P3 Series with RO5 Dual Rear				
THIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND WILL BE REFLECTED ON THE INVOICE SEPARATELY.  For complete specifications and ordering information, see "OTHER OPTIONS" Section.  TUBELESS  LT215/85R16-C Steel Belted Radial Ply Blackwall  Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Front and Single Rear 1940-lbs)  (Maximum Capacity Dual Rear 1764-lbs)  Front  P2 Series (Standard)	Wheels.				
P2 Series (Standard) XYJ NO ADDITIONAL CHARGE P3-Series without R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels except P3 1842 XYJ N.C. 22.00 22.00 P3 1842 only (Standard) XYJ NO ADDITIONAL CHARGE P2 Series and P3 1842 only. (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO. 578.00 578.00 Spare. Available on Step-Van/Value Van only when P14 or P15 Spare Wheel Carrier is specified. P2 Series only. Not available on E32 Steel Body when B3J Diesel Equipment is specified ZYJ .05 283.00 283.05	Maximum Capacity Front and Single Rear 1940-lbs) (Maximum Capacity Dual Rear 1764-lbs)				
P3-Series without R05 Dual Rear Wheels (Standard) XYJ NO ADDITIONAL CHARGE P3 Series with R05 Dual Rear Wheels except P3 1842 XYJ N.C. 22.00 22.00 P3 1842 only (Standard) XYJ NO ADDITIONAL CHARGE P2 Series and P3 1842 only. (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ NO. 578.00 578.00 Spare. Available on Step-Van/Value Van only when P14 or P15 Spare Wheel Carrier is specified YYJ Not available on E32 Steel Body when B3J Diesel Equipment is specified ZYJ .05 283.00 283.05					
P3 Series with R05 Dual Rear Wheels except P31842 XYJ N.C. 22.00 22.00 P31842 only (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ NO ADDITIONAL CHARGE YYJ N.C. 578.00 578.00 Spare. Available on Step-VarvValue Van only when P14 or P15 Spare Wheel Carrier is specified. P2 Series only. Not available on E32 Steel Body when B3J Diesel Equipment is specified ZYJ .05 283.00 283.05	P3-Series without R05 Dual Rear Wheels (Standard)				
P31842 only (Standard)	P3 Series with R05 Dual Rear Wheels except P31842				20.00
Rear P2 Series and P3 1842 only. (Standard) Not available on E32 Steel Body when B3J Diesel Equipment is specified YYJ NO ADDITIONAL CHARGE P3 Series only except P3 1842 YYJ N.C. 578.00 578.00 Spare. Available on Step-Var/Value Van only when P14 or P15 Spare Wheel Carrier is specified. P2 Series only. Not available on E32 Steel Body when B3J Diesel Equipment is specified ZYJ .05 283.00 283.05 P3 Series only	P31842 only (Standard)				22.00
E32 Steel Body when B3J Diesel Equipment is specified	Rear				
specified YYJ NO ADDITIONAL CHARGE P3 Series only except P31842 YYJ N.C. 578.00 578.00 Spare. Available on Step-Vari/Value Van only when P14 or P15 Spare Wheel Carrier is specified. P2 Series only. Not available on E32 Steel Body when B3J Diesel Equipment is specified ZYJ .05 283.00 283.05	F2 Series and F3 1842 only. (Standard) Not available on				
P3 Series only except P31842	Specified	VV I	NO ABSITIONAL	0114555	
Spare. Available on Step-Van/Value Van only when P14 or P15 Spare Wheel Carrier is specified. P2 Series only. Not available on E32 Steel Body when B3J Diesel Equipment is specified		-			E78.00
or P15 Spare Wheel Carrier is specified. P2 Series only. Not available on E32 Steel Body when B3J Diesel Equipment is specified	Spare. Available on Step-Van/Value Van only when P14	· , <del>-</del>	14.6.	3 / 0.00	578.00
B3J Diesel Equipment is specified ZYJ .05 283.00 283.05	or P15 Spare Wheel Carrier is specified.				
P3 Series only 283.05	R3 I Diesel Equipment in appeting	704			
	P3 Series only				
.05 294.00 294.05	, = 00.100 0.11, 1.	213	.05	294.00	294.05
		<del></del>			
				-	

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

## OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

res: (Continued) T235 /85816-E Steel Belted Radial Ply Blackwall Maximum Capacity 3042-lbs) P3 Series only. Front	-		List Price	Suggester Retail Price
T235 /85R16-E Steel Belted Radial Ply Blackwall Naximum Capacity 3042-lbs) P3 Series only. Front Rear				
flaximum Capacity 3042-lbs) P3 Series only. Front Rear				
Front				
Rear	XYN	104	440.00	
	YYN	1.94 1,94	116.00 84.00	117.94 85.94
Spare. Available on Step-Van/Value Van only when P14 or P15 Spare Wheel Carrier is specified	ZYN			
T215/85R16-D Steel Belted Radial Ply Blackwall  Asximum Capacity Front and Single Rear 2315-lbs)  (Maximum Capacity Dual Rear 2105-lbs)	2111	1.02	341.00	342.02
Front				
P2 Series	XYK	.10	32.00	32.10
P3 Series without R05 Dual Rear Wheels or P31842.	XYK	.10	32.00	32.10
P3 Series with R05 Dual Rear Wheels	XYK	.10	54.00	54.10
P31842 only	XYK	.10	32.00	32.10
P2 Series				
With ZW9 or E33 Aluminum Body With E32 Steel Body	YYK	.10	32.00	32.10
Without B3J Diesel Equipment	YYK	.10	32.00	32.10
P3 Series.	YYK	NO ADDITION	AL CHARGE	
With single rear wheels (Standard)	YYK	NO ADDITION	AL CHARGE	
With R05 Dual Rear Wheels except P31842	YYK	.30	642.00	642.30
P31842	YYK	.20	64.00	64.20
P2-3 Series without R05 Dual Rear Wheels or				
P3 1842	ZYK	.10	299.00	299.10
215/85R16-D On-Off Road Steel Belted Radial Ply Blackwall Rear	ZYK	.10	310.00	310.10
P2 Series only With ZW9 or E33 Aluminum Body With E32 Steel Body	YYL	.46	86.00	86.46
Without B3J diesel Equipment	YYL	.46	86.00	86.46
With B3J Diesel Equipment	YYL	.36	54.00	54.36
P3 Series without R05 Dual Rear Wheels	YYL	.36	54.00	54.36
P3 Series with R05 Dual Rear Wheels except P31842	YYL	.92	750.00	750.92
P31842  Spare. Available on Step-Van/Value Van only when P14 or P15 Spare Wheel Carrier is specified.	YYL	.92	172.00	172.92
P2-3 Series without R05 Dual Rear Wheels or				
P31842P3 Series with R05 Dual Rear Wheels or P31842	ZYL ZYL	.28 .28	326.00 337.00	326.28 337.28

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

# OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggester Retail Price
				rnceo
ires: (Continued)				
LT235 /85R16-D Steel Belted Radial Ply Blackwall				
(Maximum Capacity 2623-lbs)				
Front	XYM	1.00	04.00	
Rear	2141	1.80	84.00	85.80
P2 Series with ZW9 Chassis or E33 Aluminum Body . P2 Series with E32 Steel Body	YYM	1.80	84.00	85.80
Without B3J Diesel Equipment	YYM	1.80	84.00	05.00
With Diesel Equipment	YYM	1.70	52.00	85.80 53.70
P3 Series	YYM	1.70	52.00	53.70
Spare. Available on Step-Van/Value Van only when P14				
or P15 Spare Wheel Carrier is specified	ZYM	.95	325.00	325.95
(Maximum Capacity, Front 2800-lbs) (Dual Rear 2460-lbs).				
With L25 4.8 Liter Engine available only when GQ1 Axle				
is specified. With LT9 5.7 Liter Engine or B3J Diesel				
Equipment not available with 4.10 rear axle ratio.				
Front				
All except P31842	XSF	2.08	(-62.00)	(-59.92)
P31842 only	XSF	2.08	(-84.00)	(-81.92)
Rear All except P31842	Ver		ŕ	,
P31842 only	YSF YSF	4.16	410.00	414.16
Spare. Available on Step-Van/Value Van only when P14	135	4.16	(-168.00)	(-163.84)
or P15 Spare Wheel Carrier is specified	ZSF	1.09	252.00	252.00
8-19.5/D On-Off Road Nylon Blackwall		1.09	232.00	253.09
(Maximum Capacity, Dual Rear 2460-lbs)				
Rear				
All except P31842P31842 only	YSE	7.52	526.00	533.52
Spare. Available on Step-Van/Value Van only when P14	YSE	7.52	(-52.00)	(-44.48)
or P15 Spare Wheel Carrier is specified.	ZSE	1.93	291.00	200.00
TUBE-TYPE	232	1.93	281.00	282.93
7.50-16/C Highway Nylon Ply Blackwall				
(Maximum Capacity Front and Single Rear 2060-lbs)				
(Maximum Capacity Dual Rear 1815 lbs) Front				
P2-3 Series without R05 Dual Rear Wheels or P31842	XPB			
P3 Series with R05 Dual Rear Wheels	XPB	( 10)	(-222.00)	(-222.10)
Rear.	Ar B	(10)	(-200.00)	(-200.10)
P2 Series. Not available on E32 Steel Step-Van when				
B3J Diesel Equipment is specified	YPB	( 10)	(-222.00)	(-222.10)
P3 Series with R05 Dual Rear Wheels except P31842	YPB	(20)	134.00	133.80
P31842	YPB	(20)	(-444.00)	(-444.20)
Spare. Available on Step-Van/Value Van only when P14 or P15 Spare Wheel Carrier is specified.			•	,
P2 Series only	700	a. =		
P3 Series with Dual Rear Wheels or P31842	ZPB ZPB	N.C.	172.00	172.00
7.50-16/D Highway Nylon Ply Blackwall	210	N.C.	183.00	183.00
(Maximum Capacity Front and Single Rear 2440-lbs)				
(Maximum Capacity Dual Rear 2140-lbs)				
Front P2 2 Series without BOS Burd Boss Miles II.				
P2-3 Series without R05 Dual Rear Wheels or P31842 P3 Series with R05 Dual Rear Wheels	XPF	( 10)	(-190.00)	(-190.10)
Rear	XPF	( 10)	(-168.00)	(-168.10)
P2 Series only				
With ZW9 Chassis or E33 Alumimun Body	YPF	/ 101	(-190.00)	/ 100 101
With E32 Steel Body		(10)	1-190.00)	(-190.10)
Without B3J Diesel Equipment	YPF	(-, 10)	(-190.00)	(-190.10)
With B3J Diesel Equipment	YPF	(20)	(-222.00)	(-222.20)
P3 Series without R05 Dual Rear Wheels	YPF	(20)	(-222.00)	(-222.20)
P3 Series with R05 Dual Rear Wheels except P31842 P31842 only	YPF	(20)	198.00	197.80
Spare. Available on Step-Van/Value Van only when P14	YPF	(20)	(-380.00)	(-380.20)
or P15 Spare Wheel Carrier is specified.				
P2-3 Series without R05 Dual Rear Wheels	ZPF	N.C	188.00	190.00
P3 Series with R05 Dual Rear Wheels or P31842 .	ZPF	N.C. N.C.	199.00	188.00 199.00
		14.0.	. 55.00	

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that

it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

# OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price⇔
	<u> </u>	···································		
ires: (Continued)				
.50-16/D On-Off Road Nylon Ply Blackwall				
Maximum Capacity Front and Single Rear 2440-lbs)				
(Maximum Capacity Dual Rear 2140-lbs)				
Rear				
P2 Series only				
With ZW9 Chassis or E33 Aluminum Body	YPG	(02)	(-132.00)	(-132.02)
With E32 Steel Body		, · · <b>,</b>	(	(-132.01)
Without B3J Diesel Equipment	YPG	(02)	(-132.00)	(-132.02)
With B3J Diesel Equipment	YPG	( 12)	(-164.00)	(-164.12)
P3 Series with R05 Dual Rear Wheels except P31842	YPG YPG	(12)	(-164.00)	(-164.12)
P31842 only	YPG	(04)	314.00	313.96
Spare. Available on Step-Van/Value Van only when P14	IFG	(04)	(-264.00)	(-264.04)
or P15 Spare Wheel Carrier is specified.				
P2-3 Series without R05 Dual Rear Wheels	ZPG	.04	217.00	217.04
P3 Series with R05 Dual Rear Wheels or P31842	ZPG	.04	228.00	217.04 228.04
7.50-16/D Highway Polyester Ply Blackwall		.04	~20.00	220.04
Maximum Capacity Front and Single Rear 2440-lbs)				
(Maximum Capacity Dual Rear 2140-lbs)				
Front P3 Series without B0E Dual Boar Whate at 831843	V0=			
P3 Series without R05 Dual Rear Wheels or P31842 . P3 Series with R05 Dual Rear Wheels	XPE	(10)	(-144.00)	(-144.10)
Rear	XPE	( 10)	(-122.00)	(-122.10)
P3 Series without R05 Dual Rear Wheels	YPE			
P3 Series with R05 Dual Rear Wheels except P31842	YPE	(20)	(-176.00) 290.00	(-176.20)
P31842 only	YPE	(20) (20)	(-288.00)	289.80
Spare. Available on Step-Van/Value Van only when P14		(20)	(-286.00)	(-288.20)
or P15 Spare Wheel Carrier is specified.				
P3 Series without R05 Dual Rear Wheels	ZPE	N.C.	211.00	211.00
P3 Series with R05 Dual Rear Wheels or P31842	ZPE	N.C.	222.00	222.00
7.50-16/E Highway Nylon Ply Blackwall				
Maximum Capacity 2780-lbs) Front				
Rear	XPK	.02	(-158.00)	(-157.98)
P2 Series only				
With ZW9 Chassis or E33 Aluminum Body	YPK	07	( 150.00)	
With E32 Steel Body	71 K	.02	(-158.00)	(-157.98)
Without B3J Diesel Equipment	YPK	.02	(-158.00)	(-157.98)
With B3J Diesel Equipment	YPK	(08)	(-190.00)	(-190.08)
P3 Series only	YPK	(08)	(-190.00)	(-190.08)
Spare. Available on Step-Van/Value Van only when P14		141	, ,	(
or P15 Spare Wheel Carrier is specified	ZPK	.06	204.00	204.06
OTI	HER OPTIONS			
ir Conditioning: Available only when E32 Steel or E33				
luminum Body.				
Vithout B3J Diesel Equipment, Also includes K81 Generator				
and VO1 H.D. Radiator is specified	C60	N.A.	1095.00	1095.00
Vith B3J Diesel Equipment	C60	N.A.	1074.00	1074.00
attery: Heavy-Duty. 12-volt. 515 Cold Cranking Amps		A		.0,4.00
elco Freedom. Not available when B3J Diesel Equipment is				
pecified	UA1	N.A.	50.00	50.00
rakes: Heavy-Duty Power. Standard on 178" wheelbase.		••••	-0.00	
P2 Series only	J55	N.A.	105.00	105.00
P3 Series only.		и.м.	100.00	103.00
Without B3J Diesel Equipment	J55	N.A.	218.00	218.00
With B3J Diesel Equipment	J55	N.A.	57.00	57.00
ooler System: Engine Oil. Available only when LT9 5.7				
iter Engine is specified	KC4	N.A.	116.00	116.00

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

## OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price♦
оті	HER OPTIONS			
Cooling System: Radiator, Heavy-Duty. Not available when B3J Diesel Equipment is specified. Included when C60				
Air Conditioning is specified	V01	N.A.	51.00	51.00
Generator: 66-Amp Delcotron. Included with B3J Diesel Equipment or C60 Air Conditioning is specified	K81	N.A.	21.00	21.00
Heater, Engine Block: 600 watts, 120 volts. Not available when B3J Diesel Equipment is specified	К05	A1 A		
Non-School Bus Usage Option: P3 F. C. Chassis only. Not available when B3D School Bus Chassis Equipment or B3M Deluxe School Bus Chassis Equipment is specified. Also	KOS	N.A.	31.00	31.00
not available on P31842	83U	NO ADDITION	AL CHARGE	•
Preliminary Price Information	B3W	N.A.	N.A.	N.A.
Springs: Rear, Heavy-Duty. Capacity 2850-lb each. P2 Series only Rear, Main and Auxiliary. Capacity 4000-lb each. Standard on P31842 only. Available only when R05 Dual Rear Wheels is specified. SE and SF 8-19.5/D Tires not available when LT9 5.7 Liter Engine and 4.10 Rear Axle Ratio are specified. Also not available when 4.56 Rear Axle Ratio and L25 4.8 Liter	G50	N.A.	55.00	55.00
Engine are specified with SE or SF 8-19.5/D Tires  Wheels, Dual Rear: Standard on 178" wheelbase. Available only when J55 HD Brakes is specified. Step-Van/Value Van also available only when E70 Wheelhousings is specified. Includes dual rear chassis	G60	N.A.	149.00	149.00
provisions	R05	N.A.	72.00	72.00
Wheels, Single Rear: P3 Series only. Not available on P31842 or when R05 Dual Rear Wheels are specified Wheel, Spare: $19.5^{\circ} \times 6.00^{\circ}$ . P3 Series only. Included when spare tire is specified. Available only when 8-19.5 tires are specified. E32 Steel or E33 Aluminum Body available only	RO4	NO ADDITION	AL CHARGE	
when P14 or P15 Spare Wheel Carrier is specified	Q34	N.A.	75.00	75.00

 <sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that
it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

# STEP-VAN/VALUE VAN (STEEL) (6800-Ib-10,000-Ib GVW) OPTIONS AND ACCESSORIES WHEN INSTALLED BY UNION CITY BODY COMPANY

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price⇔
Dealer Note: When ordering £32 Body, one of the followin	g options must be specif	ied.		
Regular Body Options only Special Body Options required	YJ1 YJ2	NO ADDITION NO ADDITION		
Air Vent: Passenger Side. Not available when C60 Air Conditioning is specified	4			
Ashtray and Cigarette Lighter: Not available when B3J Diesel Equipment is specified	C56	N.A.	41.00	41.00
Bumper: Painted Rear Step with Recessed Lights. Not available on P20842 or P30842	DT4	N.A.	36.00	36.00
Carrier, Spare Wheel: Inside Mounted.	V35	N.A.	160.00	160.00
Left-hand	P14	N.A.	28.00	28.00
Right-hand	P15	N.A.	28.00	28.00
Doors, Rear: Specify opening width and door type. (Replacing standard double doors with 38' opening)				
Double Doors, 60* Opening. Includes door glass	E76	N.A.	87.00	87.00
Wraparound Double Doors. 74* Opening. Includes door glass	E46 E79	N.A. N.A.	442.00	442.00
Floor, Cargo: Smooth Steel, 11 Gage	E71	N.A. N.A.	195.00 129.00	195.00
Mirrors:	271	N.A.	129.00	129.00
Exterior, Wide-Angle. Bright	D77	N.A.	46.00	46.00
nterior, Rearview	D31	N.A.	36.00	36.00
Paints, Exterior: (See Interior and Exterior Color Selection Chart for ordering information). Solid (Chevrolet/GMC option)				
Special Applications. Contact Union City Body Company for prices.	ZY1	NO ADDITION.	AL CHARGE	
Panel, Sealed: Includes sliding window. Replaces LH side				
door	E89	N.A.	69.00	69.00
Right-hand Sliding Door	AX6	N.A.	200.00	222.22
Center Sliding Door	AX7	N.A. N.A.	388.00 410.00	388.00 410.00
Left-hand Side only	AX5	N.A.	150.00	150.00
Partition, Plywood: With Sliding Door. Located between				
driver's seat and load compartment	AP7	N.A.	252.00	252.00
AM Badio	U63	N.A.	178.00	178.00
AM/FM Radio	U69	N.A.	282.00	282.00
Seat Equipment: (Added weight includes passenger veight allowance of 150-lb per senting position. Refer to rehicle and option weight section of Data Book.)				
Front, Auxiliary. Same as standard driver's seat. Not available when AS1 or AX8 Seat is specified. Includes D20 Sunshade	A57	<b>A</b> 1 <b>A</b>	160.00	100.00
Oriver, Deluxe Bucket	AS1	N.A. N.A.	168.00 114.00	168.00 114.00
river, Deluxe Bucket with fixed pedestal	AX8	N.A.	176.00	176.00
Passenger, Deluxe Bucket. Available only when AS1 or AX8 Bucket Seat is specified. Includes D20 Sunshade	463			
Sunshade, Passenger: Included when A57 Auxiliary or	AS2	N.A.	217.00	217.00
AS2 Bucket Seat is specified	D20	N.A.	43.00	43.00
/entilator: Roof. Crank Type	C55	N.A.	102.00	102.00
Wheelhousing: Dual Rear Type. P3 Series only, Available				
Inly when R05 Dual Rear Wheels are specified	E70	N.A.	67.00	67.00
Nindow, Sliding: Right Front Door.	AC2	N.A.	89.00	89.00

For special body work not covered by the above options, refer to Union City Body Company Sales Department. Subsequent installation and payment for such special body work will be handled between the body company and the dealer.

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

### STEP-VAN/VALUE VAN (ALUMINUM) (6800-lb-10,000-lb GVW)

#### OPTIONS AND ACCESSORIES WHEN INSTALLED BY UNION CITY BODY COMPANY

Description	Option Number	Factory D&H(a)	Liet Price	Mfr's Suggested Retail Price♦
Dealer Note: When ordering E33 Body, one of the following	ontions must be specifi	ed.		
Regular Body Options only	YJ1	NO ADDITIONA	AL CHARGE	
Special Body Options required	YJ2	NO ADDITIONA	AL CHARGE	
No. March. Consultation Cities. New York law has CCO. Alex				
Air Vent: Passenger Side. Not available when C60 Air Conditioning is specified	C56	N.A.	41.00	41.00
Ashtray and Cigarette Lighter: Not available when				
33J Diesel Equipment is specified	DT4	N.A.	36.00	36.00
Burnper: Painted. Rear Step with Recessed Lights. Not available on P20842 or P30842.	V35	N.A.	160.00	160.00
Carrier, Spare Wheel: Inside Mounted.	<b>V</b> 33	N.A.	160.00	100.00
eft-Hand	P14	N.A.	28.00	28.00
Right-Hand	P15	N.A.	28.00	28.00
Doors, Rear: Specify opening width and door type Replacing standard double doors with 38" opening).				
Double Doors. 60" Opening with strap hinges, Includes door	E7.6	N A	97.00	97.00
glass Overhead Door, Includes door glass.	E76	N.A.	87.00	87.00
73" Opening	E46	N.A.	442.00	442.00
82" Opening. Available only when E73 9" Body Width	546	8.1 ·4	440.00	440.00
Addition is specified	E46	N.A.	442.00	442.00
Addition is specified	E46	N.A.	442.00	442.00
Wraparound Double Doors. Includes door glass. Not available	<u> </u>	0.0		
when E73 9" or E74 13" Body Width Addition is specified.				
74" Opening	E79	N.A.	195.00	195.00
83" Opening. Available only when E73 9" Body Width Addition is specified	E52	N.A.	217.00	217.00
87" Opening. Available only when E74 13" Body Width		14,651	217.00	2.7.00
Addition is specified	E53	N.A.	233.00	233.00
Height Addition, Body: 80" Inside. With 10 1/2 ft body				
only	E65	N.A.	206.00	206.00
Length Extensions, Body: P31442 only.	<b>503</b>		222.00	200.00
12" Extension	E67 E72	N.A. N.A.	336.00 450.00	336.00 450.00
Lock, Rear Door: Slam-Type. Not available when E46	C12	13.0.	430.00	430.00
Overhead Rear Door is specified	AX9	N.A.	69.00	69.00
Mirrors:				
Exterior, Wide Angle. Bright	077	N.A.	46.00	46.00
Interior, Rearview	D31	N.A.	36.00	36.00
Paints, Exterior: (See Interior and Exterior Color Selection				
Chart for ordering information).	71/4	A1 A	227.00	227.00
Solid (Chevrolet/GMC option)	ZY1	N.A.	337.00	337.00
prices.				
Panel, Sealed: Includes stiding window. Replaces LH side				
door	E89	NO ADDITION	AL CHARGE	•
Partitions: Expanded Metal.				
Right-Hand Sliding Door	AX6	N.A.	388.00	388.00
Center Sliding Door	AX7	N.A.	410.00 150.00	410.00 150.00
Left-Hand side only	AX5	N.A.	130.00	130.00
driver's seat and load compartment	AP7	N.A.	252.00	252.00
Radio Equipment:				
AM Radio	U63	N.A.	178.00	178.00
AM/FM Radio	U69	N.A.	282.00	282.00
Seat Equipment: (Added weight includes passenger weight allowance of 150-lb per seating position. Refer to vehicle and option weight section of Data Book.)				
Front Auxiliary. Same as standard driver's seat. Not available	۸57	N.A.	168.00	168.00
when AS1 or AX8 Seat is specified. Includes D20 Sunshade Driver, Deluxe Bucket	A57 AS1	N.A. N.A.	114.00	114.00
Driver, Deluxe Bucket with fixed pedestal	AX8	N.A.	176.00	176.00
Passenger, Deluxe Bucket. Available only when AS1 or AX8			0/	
Bucket Seat is specified. Includes D20 Sunshade	AS2	N.A.	217.00	217.00

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that

it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

# STEP-VAN/VALUE VAN (ALUMINUM) (6800-lb-10,000-lb GVW) OPTIONS AND ACCESSORIES WHEN INSTALLED BY UNION CITY BODY COMPANY

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggester Retail Price ()
				FRIC⊕ ♦
Sunshade, Passenger: Included when A57 Auxiliary				
seat or ASZ Bucket Seats is specified	D20	4, 4	40.00	
entilator: Roof. Crank Type	C55	N.A. N.A.	43.00	43.00
Wheelhousing: Dual Rear Type. P3 Series only, Standard on 178" wheelbase Step-Van/Value Van Available only when	333	N.A.	102.00	102.00
(US Dual Rear Wheels are specified	E70	N.A.	67.00	67.00
Width Addition, Body: Includes wider front and rear number.		· ·······	07.00	87.00
* Addition.	E73	N.A.	580.00	580.00
3° Addition Vindow, Sliding: Right Front Door	E74	N.A.	735.00	735.00
	AC2	N.A.	89.00	89.00
For special body work not covered by the above options, refe payment for such special body work wit	il be handled between th	mpany Sales Department. S ie body company and the d	lubsequent i ealer.	nstallation a
			<del></del>	

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

### STEP-VAN/VALUE VAN OR F.C. CHASSIS WITH OPTIONAL 11,000-lb REAR AXLE (12,000-lb or 14,000-lb GVW)

### 1984 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with vehicles produced on and after February 13, 1984

	Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price*	Group Numbe
•	6-Cylinder 4.8 L Step Van/Value Van	iter (292 Cu	J. ln.) 1 BB	L L6 Gasoline	Engine-Engine Ord	ering Co	de L25	
	Steel (10 1/2 ft)		E32	125*				
	F.C. Chassis		ZW9	125*	.30	12777.00		15
	Step-Van/Value Van	•	2.443	123	.30	7558.00	7558.30	14
	Aluminum (10 1/2 ft)		£33	125*				
	Step Van/Value Van		E33	123	.30	14649.00	14649.30	15
	Steel (12 1/2 ft)		E32	133*				
	F.C. Chassis		ZW9	133*	.30	13046.00	13046.30	15
	Step-Van/Value Van	•	2443	133	.30	7622.00	7622.30	14
	Aluminum (12 1/2 ft)		522	122.				
			E33	133*	.30	15153.00	15153.30	15
	Step Van/Value Van			4534				
	Steel (14 1/2 ft)		E32	157*	.30	13288.00	13288.30	15
	F.C. Chassis		ZW9	157*	.30	7686.00	7686.30	14
	Step-Van/Value Van							
	Aluminum (14 1/2 ft)		E33	157*	.30	15672.00	15672.30	15
	F.C Chassis		ZW9	178*	.30	9055.00	9055.30	14
	Step-Van/Value Van							
	Aluminum (18 ft)	CP/TP31842	E33	178*	.30	18004.00	18004.30	15
	8-Cylinder 6.2 L	iter (379 Cı	ı. In.) H.D.	Diesel V8 End	gine-Engine Code LL	4		
•	Step Van/Value Van		•	1	, ag 0000 40	• •		
	Steel (10 1/2 ft)	CP/TP30842	E32 & B3J	125*	.30	15136.00	15136.30	15
	F.C. Chassis	CP/TP30842	ZW9 & B3J	125*	.30	9713.00	9713.30	14
	Step-Van/Value Van	•		*	.50	3713.00	3713.30	14
	Aluminum (10 1/2 ft)	CP/TP30842	E33 & B3J	125*	.30	16990.00	16990.30	4.5
	Step Van/Value Van			. 20	.30	10990.00	16990.30	15
	Steel (12 1/2 ft)		E32 & B3J	133*	20	1540000	45400.00	
	F.C. Chassis		ZW9 & B3J	133"	.30	15403.00	15403.30	15
	Step-Van/Value Van	•	-113 G D30	100	.30	9776.00	9776.30	14
	Aluminum (12 1/2 ft)		E33 & B3J	133*	20	42400.00		
	Step Van/Value Van		F33 & B33	133	.30	17489.00	17489.30	15
	Steel (14 1/2 ft)		E32 & B3J	157°				
	F.C. Chassis				.30	15642.00		15
		•	ZW9 & B3J	157*	.30	9840.00	9840.30	14
	,			400-				
	Aluminum (14 1/2 ft) F.C Chassis		E33 & B3J	157*	.30	18003.00	18003.30	15
	Step-Van/Value Van	,	ZAAA & B37	178*	.30	11042.00	11042.30	14
				4=4-				
	Aluminum (18 ft)	CP/TP31842	E33 & B3J	178°	.30	20159.00	20159.30	15

State and local taxes not included.

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

# STEP-VAN/VALUE VAN OR F.C. CHASSIS WITH OPTIONAL 11,000-lb **REAR AXLE**

# OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price♦
Emission Systems: Dealer Note - One of the following		<del>-</del>		
emission options must be specified. (See Power Teams Chart				
for availability and complete specifications).				
California Emission Requirements. Includes all testing, equipment and/or certification necessary for registration in				
the State of California.				
Without B3J Diesel Equipment	YF5	A. A.	225.00	
With B3J Diesel Equipment	YF5	N.A. N.A.	235.00 235.00	235.00
High Altitude Emission Equipment. Not available when YF5		N.A.	233.00	235.00
California Emission Requirements are specified. Available				
only when B3J Diesel Equipment is specified	NA6	NO ADDITION	AL CHARGE	
Altitude or YF5 California Emission Requirements are				
specified	NA5	110 45517101		_
ingines: (See Power Teams Chart for availability and	NAS	NO ADDITION	AL CHARGE	
complete specifications)				
Gasoline				
5.7 Liter (350 Cu. In.) 4 BBL V8 Gasoline	LT9	N.A.	500.00	500.00
Diesel		A.A.	500.00	500.00
6.2 Liter (379 Cu. In.) H.D. V8 Diesel. Available only when				
83J Diesel Equipment is specified	LL4	NO ADDITION	AL CHARGE	•
Fransmissions:				
3-Speed Automatic. Includes extra cooling Without HA3 11,000-lb Capacity Rear Axle	14144			
With HA3 11,000-lb Capacity Rear Axie	MX1 MX1	N.A.	492.00	492.00
-Speed Manual	MM4	N.A.	1070.00	1070.00
Axles, Rear: (See Power Teams Chart for option number	141141-4	NO ADDITION	AL CHANGE	
selection, availability and complete specifications)				
Capacity 11,000-lb. 5.29 Ratio. Not available when L25 4.8				
Liter Engine is specified. Available only when RO5 Dual Rear				
Wheels, SF, SE or SG 8-19.5 Tubeless Tires are specified.				
KC4 Engine Oil Cooler required when LT9 5.7 Liter Engine				
is specified. MM4 4-Speed Transmission with LT9 5.7 Liter				
Engine is available only when VO1 H.D. Radiator or C60 Air				
Conditioning is specified. Includes H.D. power 4-wheel disc				
brakes, 4500-lb front axle, 5000-lb front springs and 5900-lb each main and auxiliary rear springs and propshaft				
parking brake.				
All except P31842	HA3	N.A.	1866.00	100000
P31842 only	HA3	N.A. N.A.	1648.00	1866.00 1648.00
Fires: (See Tire Charts for Tire Availability)		N.A.	10-0.00	1048.00
All rim sizes are 6.00"				
Dealer Note: When dual rear tires are specified, R05 Dual F	lear Wheels will he	annied to the order		
THIS EQUIPMENT IS NOT PHICED IN THE TIRE OPTION AND U	NIII BE BEELECTE	O ON THE INVOICE CERABATE	LY.	
For complete specifications and ordering information, see "QTI	HER OPTIONS' Sec	tion.		
UBELESS				
3-19.5/D Highway Nylon Ply Blackwall (Maximum Capacity, Front 2800-lbs) (Dual Rear 2460-lbs)				
Front Capacity, Front 2800-ibs) (Dual Rear 2460-ibs)				
All except P31842	XSF	2.00	1 83 001	. 50 00
P31842 only	XSF	2.08 2.08	(-62.00) (-84.00)	(-59.92)
Rear		2.08	(-84.00)	(-81.92)
All except P31842	YSF	4.16	410.00	414.16
P31842	YSF	4.16	(-168.00)	(-163.84)
Spare. Available on Step-Van/Value Van only when P14			, ,	, ,
or P15 Spare Wheel Carrier is specified	ZSF	1.09	252.00	253.09
-19:57D On-Off Road Nylon Ply Blackwall (Maximum Capacity, Dual Rear 2460-lbs)				
Rear				
All except P31842	YSE	7.50	E 2 C 0 0	E20.50
P31842 only	YSE	7.52 7.52	526.00 (-52.00)	533.52
Spare. Available on Step-Van/Value Van only when P14	· <del></del>	7.52	(-52.00)	(-44.48)
or P15 Spare Wheel Carrier is specified	ZSE	1.93	281.00	282.93

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

# STEP-VAN/VALUE VAN OR F.C. CHASSIS WITH OPTIONAL 11,000-lb --- REAR AXLE

# OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price⇔
- <del></del>	· · · · · · · · · · · · · · · · · · ·			
Fires: (Continued)				
8-19.5/E Highway Nylon Ply Blackwall (Maximum Capacity, Front 3170-lbs) (Dual Rear 2780-lbs) Front				
All except P31842	XSG			
P31842 only Rear	XSG	2.54 2.54	46.00 24.00	48.54 26.54
All except P31842 P31842 only	YSG YSG	5.08 5.08	626.00 48.00	631.08 53.08
Spare. Available on Step-Van/Value Van only when P14 or P15 Spare Wheel Carrier is specified.	ZSG	1.32	306.00	307.32
OT	HER OPTIONS	<del></del>		
	HER OF HUNS			
Air Conditioning: Available only when E32 Steel or E33 Alumimum Body is specified. Without B3J Diesel Equipment, Also includes K81 Generator				
and VO1 H.D. Radiator	C60	N.A. 1	095.00	1005.00
Battery: Heavy-Duty. 12-volt 515 Cold Crapking Amon	C60		074.00	1095.00 1074.00
Delco Freedom. Not available when B3J Diesel Equipment is specified				
Cooler: Engine Oil. Available only when LT9 5.7 Liter Engine	UA1	N.A.	50.00	50.00
s specified  Cooling System: Radiator, Heavy-Duty. Not available when 83J Diesel Equipment is specified Included when C60	KC4	N.A.	116.00	116.00
Air Conditioning is specified.  Generator: 66-Amp Delcotron. Included when B3J Diesel	V01	N.A.	51.00	51.00
equipment or C60 Air Conditioning is specified	K81	N.A.	21.00	21.00
vailable when B3J Diesel Equipment is specified.  Von-School Bus Usage Option: F.C. Chassis only. Not	K05	N.A.	31.00	31.00
available on 178" wheelbase	B3U	NO ADDITIONAL		
Wheels, Dual Rear: Standard on CP31842, E32 Steel or E33 Aluminum Body available only when E70 Wheelbousings		NO ADDITIONAL	CHARGE	
re specified, includes dual rear chassis provisions	R05	N.A.	72.00	72.00
Wheels, Spare: 19.5° x 6.00°	Q34	N.A.	75.00	75.00
	<del></del>			
		<del> </del>		

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

## STEP-VAN/VALUE VAN (STEEL) WITH OPTIONAL 11,000-Ib REAR **AXLE** (12,000-lb or 14,000-lb GVW)

## OPTIONS AND ACCESSORIES WHEN INSTALLED BY UNION CITY BODY COMPANY

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggester Retail Price ♦
Dealer Note: When ordering £32 Body, one of the following	g options must be spec	ified		
Regular Body Options only	YJ1	NO ADDITION	AL CHARGE	•
Special Body Options required	YJ2	NO ADDITION		
Ale Vente Conserve City No. 1 11 1 2 2 2 2				
Air Vent: Passenger Side. Not available when C60 Air Conditioning is specified	C56		44.00	
Ashtray and Cigarette Lighter: Not available when	C56	N.A.	41.00	41.00
B3J Diesel Equipment is specified	DT4	N.A.	36.00	36.00
Bumper: Painted. Rear Step with Recessed Lights, Not			00.00	30.00
available on P30842	V35	N.A.	160.00	160.00
Carrier, Spare Wheel: Inside mounted.				
Left-Hand Right-Hand	P14	N.A.	28.00	28.00
Doors, Rear: Specify opening width and door type.	P15	N.A.	28.00	28.00
Replacing standard double doors with 38" opening). Includes door glass				
Double Doors. 60" opening with strap hinges	E76	N.A.	87.00	87.00
Overhead Door. 66" Opening	E46	N.A.	442.00	442.00
Wraparound Double Doors. 74" opening with strap hinges.	E79	N.A.	195.00	195.00
Floor, Cargo: Smooth Steel	E71	N.A.	129.00	129.00
Mirrors:				
Exterior, Wide-Angle. Bright	D77 D31	N.A.	46.00	46.00
Paints, Exterior: (See Interior and Exterior Color Selection Chart for ordering information)	031	N.A,	36.00	36.00
Solid (Chevrolet/GMC option)  Special Applications. Contact Union City Body Company for prices.	ZY1	NO ADDITION	AL CHARGE	
Panel, Sealed: Includes sliding window. Replaces LH side				
door,	E89	N.A.	69.00	69.00
Partitions: Expanded metal.				
Right-Hand Sliding Door	AX6	N.A.	388.00	388.00
Center Sliding Door	AX7 AX5	N.A.	410.00	410.00
Partition, Plywood: With sliding door. Located between	AXS	N.A.	150.00	150.00
driver's seat and load compartment	AP7	N.A.	252.00	252.00
Radio Equipment:		TVA.	232.00	232.00
AM Radio	U <b>63</b>	N.A.	178.00	178.00
AM/FM Radio	U69	N.A.	282.00	282.00
Seat Equipment: (Added weight includes passenger weight allowance of 150-lb per seating position. Refer to rehicle and option weight section of Data Book.)				
Front, Auxiliary. Same as standard driver's seat. Not available when AS1 or AX8 Bucket Seat is specified, Includes D20				
Sunshade	A57	N.A.	168.00	168.00
Driver, Deluxe Bucket	AS1	N.A.	114.00	114.00
Oriver, Deluxe Bucket with fixed pedestal	AX8	N.A.	176.00	176.00
Bucket Seat is specified. Includes D20 Sunshade	AS2	N.A.	217.00	217.00
Sunshade, Passenger: Included when A57 Auxiliary	70E	N.A.	217.00	217.00
Seat or AS2 Bucket Seats is specified	D20	N.A.	43.00	43.00
Ventilator: Roof. Crank Type	C55	N.A.	102.00	102.00
Wheelhousing: Dual Rear Type. Available only when ROS		N.A.	102.00	102.00
Oual Rear Wheels are specified	E70	N.A.	67.00	67.00

 <sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

## STEP-VAN/VALUE VAN (STEEL) WITH OPTIONAL 11,000-16 REAR **AXLE**

## OPTIONS AND ACCESSORIES WHEN INSTALLED BY UNION CITY BODY COMPANY

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price⇔
Window, Sliding: Right Front Door	AC2	N.A.	89.00	89.00
For special body work not covered by the above of		npany Sales Department. See body company and the o	Subsequent lealer.	
	<u>-</u> -			
			<del></del>	
				<del></del>
			<u></u>	·
				<del>-</del>
			·-···	
				···
				<del> </del>
			<del></del>	
			<del></del>	
		<del> </del>	VT 18-12	<del></del> ,
		-	<u>.                                    </u>	

 <sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that
it has paid, incurred or agreed to pay thereon.
 ♦ State and local taxes not included.

# STEP-VAN/VALUE VAN (ALUMINUM) WITH OPTIONAL 11,000-lb REAR AXLE (12,000-lb or 14,000-lb GVW)

## OPTIONS AND ACCESSORIES WHEN INSTALLED BY UNION CITY BODY COMPANY

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail _ Price♦
Dealer Note: When ordering E33 Body, one of the followin	a cations must be speci	Gad.		
Regular Body Options only	g options must be speci YJ1	NO ADDITIONAL	CHARGE	
Special Body Options required	YJ2	NO ADDITIONAL		
		<del></del>	74.0	
Air Vent: Passenger Side. Not available when C60 Air				
Conditioning is specified	C56	N.A.	41.00	41.00
Ashtray and Cigarette Lighter: Not available when B3J Diesel Equipment is specified	DT4	N.A.	20.00	20.00
Bumper: Painted. Rear Step with Recessed Lights. Not	014	N.A.	36.00	36.00
available on P30842	V35	N.A.	160.00	160.00
Carrier, Spare Wheel: Inside mounted.		11,51	100.00	100.00
Left-Hand	P14	N.A.	28.00	28.00
Right-Hand	P15	N.A.	28.00	28.00
Doors, Rear: Specify opening width and door type.				
Replacing standard double doors with 38° opening). Includes a door glass.				
Double Doors: 60" opening	E76	N.A.	87.00	87.00
Overhead Door.		14.74	07.00	37.00
73" Opening	E46	N.A.	442.00	442.00
82" Opening. Available only when E73 9" Body Width Addition is specified	E46	N.A.	442.00	440.00
85" Opening. Available only when E74 13" Body Width	E40	N.A.	442.00	442.00
Addition is specified,	E46	N.A.	442.00	442.00
Wraparound Double Doors. Includes door glass				
74" Opening	E79	N.A.	195.00	195.00
Addition is specified	E52	N.A.	217.00	217.00
87" Opening. Available only when E74 13" Body Width				217.00
Addition is specified	E53	N.A.	233.00	233.00
Height Addition, Body 80" Inside	E65	N.A.	206.00	206.00
Length Extensions, Body: P31442 only.	503			
12" Extension	<b>E67</b> E72	N.A. N.A.	336.00 450.00	336.00 450.00
Lock, Rear Door: Slam Type. Not available when E46	C/2	N.A.	450.00	450.00
Overhead Rear Door is specified	AX9	N.A.	69.00	69.00
Mirrors:				
Exterior, Wide Angle. Bright	D77	N.A.	46.00	46.00
Interior, Rearview	D31	N.A.	36.00	36.00
Paints, Exterior: (See Interior and Exterior Color Selection Chart for ordering information).				
Solid (Chevrolet/GMC option)	ZY1	N.A.	337.00	337.00
Special Applications. Contact Union City Body Company for	<b>-</b>	14.6.	007.00	007.00
prices.				
Panel, Sealed: Includes sliding window. Replaces LH side	F00			_
door	E89	NO ADDITIONAL	CHARGE	Ī
Partitions: Expanded metal. Right-Hand Sliding Door	AX6	N.A.	388.00	388.00
Center Sliding Door	AX7	N.A.	410.00	410.00
Left-Hand side only	AX5	N.A.	150.00	150.00
Partition, Plywood: With sliding door. Located between				
driver's seat and load compartment	AP7	N.A.	252.00	252.00
Radio Equipment:	1100			.==
AM RadioAM/FM Radio	U63 U69	N.A.	178.00	178.00
TRIVIT IN MOUID	009	N.A.	282.00	282.00

Published: FEBRUARY, 1984

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that

it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

# STEP-VAN/VALUE VAN (ALUMINUM) WITH OPTIONAL 11,000-Ib

## OPTIONS AND ACCESSORIES WHEN INSTALLED BY UNION CITY BODY COMPANY

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price♦
-				
Seat Equipment: (Added weight includes passenger veight allowance of 150-lb per seating position. Refer to				
vehicle and option weight section of Data Book.) Front Auxiliary. Same as standard driver's seat. Not available				
when AS1 or AX8 Bucket Seat is specified. Includes D20 Sunshade.	457			
Driver, Deluxe Bucket	A57 AS1	N.A. N.A.	168.00 114.00	168.00 114.00
Driver, Deluxe Bucket with fixed pedestal	AX8	N.A.	176.00	176.00
Bucket Seat is specified. Includes D20 Sunshade  Sunshade, Passenger: Included when A57 Auxiliary	AS2	N.A.	217.00	217.00
Seat or AS2 Bucket Seats is specified	D20	N.A.	43.00	43.00
Ventilator: Roof. Crank Type	C55	N.A.	102.00	102.00
Wheelhousings: Dual Rear Type. Standard on 178" wheelbase Step-Van/Value Van. Available only when RO5			-	
Dual Rear Wheels are specified	E70	N.A.	67.00	67.00
Width Addition, Body: Includes wider front and rear				
bumper. 9* Addition	E73	At 4	500.00	E00.00
13° Addition	E74	N.A. N.A.	580.00 735.00	580.00 735.00
Window, Sliding: Right Front Door	AC2	N.A.	89.00	89.00
		<u> </u>		

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

## F.C. CHASSIS WITH B3D SCHOOL BUS CHASSIS (11,500-Ib - 14,500-Ib GVW)

### 1984 VEHICLES WITH STANDARD EQUIPMENT

Prices shown are effective with vehicles produced on and after February 13, 1984

Description	Model Number	Body Code	Wheel Base	Factory D&H(a)	List Price	Mfr's Suggested Retail Price*	Group Number
6-Cylinder 4.8	Liter (292 C	u. In.) 1 BE	L L6 Gasoline E	ngine-Engine Ord	ering Co	de I 25	
r.C. Chassis	CP/TP30842	: ZW9	125*	N.A.	7558.00	7558.00	14
F.C. Chassis			133*	N.A.	7622.00		14
F.C. Chassis	CP/TP31442	ZW9	157°	N A	7686.00	7696 00	14
8-Cylinder 6.2	Liter (379 C	u. In.) H.D.	Diesel V8 Engin	e-Engine Orderin	Code L	.L4	14
F.C. Chassis			125*	N.A.	9713.00	9713.00	14
F.C. Chassis			133*	N.A.	9776.00	9776.00	14
F.C. Chassis	. CP/TP31442	ZW9 & B3J	157*	N.A.	9840.00	9840.00	14

<sup>★</sup> Manufacturer's Suggested Retail Prices do not include applicable destination charges, state and local taxes, license fees, optional equipment or accessories or special items or services.

Dealer Note: Be advised that to attain a 11,500-14,500 lb. GVW rating, these models require B3D School Bus Chassis.

Please Note: Anyone ordering a vehicle for completion or modification and use as a bus and/or school bus is solely responsible for assuring that such completed vehicle and associated equipment, which might be ordered for the vehicle, comply with all applicable Local, State and Federal Government requirements.

## OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory List D&H(a) Price	Mfr's Suggested Retail Price♦
Emission Systems: Dealer Note — One of the following emission options must be specified. (See Power Teams Chart for availability and complete specifications)			
California Emission Requirements. Includes all testing, equipment and/or certification necessary for registration in the State of California.			
Without B3J Diesel Equipment	YF5	N.A. 235.00	235.00
With B3J Diesel Equipment High Altitude Emission Requirements. Available only when B3J Diesel Equipment is specified. Not available wnen YF5 California Emission or NA5 Standard Emission	YF5	N.A. 235.00	235.00
Requirements is specified  Standard Emission Equipment. Not available when NA6 High Altitude or YF5 California Emission Requirements are	NA6	NO ADDITIONAL CHARGE	Ī
specified	NA5	NO ADDITIONAL CHARGE	
Engines: (See Power Teams Chart for availability and complete specifications) Gasoline.			
4.8 Liter (292 Cu. In.) 1 BBL L6	L25	NO ADDITIONAL CHARGE	-
5.7 Liter (350 Cu. In.) 4 BBL V8	LT9	N.A. 500.00	500.00
Diesel (270 Communication of the Communication of t			000.00
6.2 liter (379 Cu. In.) H.D. V8 Diesel. Available only when			
83J Diesel Equipment is specified	LL4	NO ADDITIONAL CHARGE	
i ransmission: 3-Speed Automatic. Includes extra cooling.			
Without HA3 11,000-Ib Capacity Rear Axle	MX1	A) A	100.55
With HA3 11,000-lb Capacity Rear Axle	MX1	N.A. 492.00 N.A. 1070.00	492.00
4-Speed Manual	MM4	NO ADDITIONAL CHARGE	1070.00

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

Refer to Dealer Order Guide for California Requirements.

State and local taxes not included.

## F.C. CHASSIS WITH B3D SCHOOL BUS CHASSIS

## OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggester Retail Price
				FIICEO
ixles, Rear: (See Power Teams Chart for option number election, availability and complete specifications)				
Ocking Differential. Available only when 4.56 Rear Axle Ratio		N.A.	36.00	36.00
is specified Capacity 11,000-lb. 5.29 Ratio. Not available when L25 4.8 Liter Engine is specified. Available only when R05 Dual Rear Wheels and SG 8-19.5 Tubeless Tires are specified. KC4 Engine Oil Cooler required when LT9 5.7 Liter Engine is specified. When MM4 4-Speed Transmission and LT9 5.7 Liter Engine are specified, available only when V01 H.D. Radiator is specified. Includes H.D. power 4-wheel disc brakes, 5000-lb front springs and 5900-lb each main and	G80	N.A.	230.00	230.00
auxiliary rear springs and prop shaft parking brake  ires: (See Tire Charts for Tire Availability)  Il rim sizes are 6.00°	на3	N.A,	1866.00	1866.00
Dealer Note: When dual rear tires are specified, RO5 Dual R HIS EQUIPMENT IS NOT PRICED IN THE TIRE OPTION AND V For complete specifications and ordering information, see *OTH UBE-TYPE 7.50-16/C Highway Nylon Ply Blackwall Maximum Capacity Each. Front 2060-lbs)	VILL BE REFLECTED ON IER OPTIONS* Section.	ied to the order. I THE INVOICE SEPARAT	ELY.	
Front 50-16/D Highway Nylon Ply Blackwall Aaximum Capacity Each. Front 2440-lbs) (Dual Rear 2140-lbs)	XPB	N.C.	(-200.00)	(-200.00)
Front	XPF	N.C.	(-168.00)	/ 160 000
Rear	YPF	N.C.	198.00	(-168.00) 198.00
Spare	2PF	N.C.	199.00	199.00
Front	XPE	N.C.	(-122.00)	(-122.00)
Rear	YPE	N.C.	290.00	290.00
Spare	ZPE	N,C.	222.00	222.00
Rear	YPG	N.C.	314.00	314.00
Spare	ŹPG	N.C.	228.00	228.00
19.5/D Highway Nylon Ply Blackwall  aximum Capacity Each. Front 2800-lbs)(Dual Rear 2460-lbs)				-
Front	XSF	N.C.	(-62.00)	(62.00)
Rear	YSF	N.C.	410.00	(-62.00) 410.00
Spare	ZŞF	N.C.	252.00	252.00
Rear	YSE	N 5	FBC	
Spare	ZSE	N.C. N.C.	526.00	526.00
19.5/E Highway Nylon Ply Blackwall  Iaximum Capacity Each. Front 3170-lbs)(Dual Rear 2780-lbs)		14.6.	281.00	281.00
Front	XSG	N.C.	46.00	46.00
Rear Spare	YSG	N.C.	626.00	626.00
215/85H16-C Highway Steel Belted Radial Ply Blackwall aximum Capacity Each. Front 1940-lbsl	ZSG	N.C.	306.00	306.00
Front	XYJ	N.C.	22.00	22.00
Front	XYK	N.C.	54.00	54.00 -
Rear Spare	YYK	N.C.	642.00	842.00
215/85R16/D On-Off Road Steel Belted Radial Blackwall  aximum Capacity Each, Dual Rear 2105-lbs	ZYK	N.C.	310.00	310.00~
				** **
Rear Spare	YYL	N.C.	750.00	750.00

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

### F.C. CHASSIS WITH B3D SCHOOL BUS CHASSIS

### OPTIONS AND ACCESSORIES WHEN INSTALLED BY GENERAL MOTORS

Description	Option Number	Factory D&H(a)	List Price	Mfr's Suggested Retail Price♦
оті	HER OPTIONS			
Battery: Heavy-Duty. 12-volt. 515 Cold Cranking Amps Delco Freedom. Not available when B3J Diesel Equipment is				
pecified	UA1	N.A.	50.00	50.00
Brake Warning Indicator  Brakes: Heavy-Duty Power. Not available when HA3 Rear Axle is specified Without B3J Diesel Equipment	UJ:1	N.A.	40.00	40.00
With 83J Diesel Equipment  Cooler: Engine Oil. Available only when LT9 5.7 Liter Engine	J55	N.A. N.A.	218.00 57.00	218.00 57.00
s specified	KC4	N.A.	116.00	116.00
vhen B3J Diesel Equipment is specified	V01	N.A	51.00	51.00
Deluxe School Bus Chassis Equipment is specified. Included when 83J Diesel Equipment is specified	K81	N.A.	21.00	21.00
vailable when B3J Diesel Equipment is specified	K05	N.A.	31.00	31.00
Preliminary Price Information School Bus Chassis Equipment: Available only when that Rear Axle and YSG 8-19.5/E Rear Tires are specified or when G60 Rear Springs and R05 Dual Rear Wheels are specified. Includes 30-gallon shielded rear mounted fuel tank	B3W	N.A.	N.A.	N.A.
sind rear frame alterations.  School Bus Chassis Equipment: Deluxe. Available by the B3D School Bus Equipment is specified. Not existed by the B3D School Bus Equipment is specified. Includes the B3D School B3D	B3D	N.A.	249.00	249.00
Without Diesel Equipment	B3M B3M	N.A. N.A.	325.00 260.00	325.00 260.00
Springs: Rear, Main and Auxiliary. Capacity 4000-lb each.  Not available when HA3 11,000-lb Capacity Rear Axle is specified	G <b>60</b>	N.A.	149.00	149.00
Wheels, Dual Rear: Available only when J55 H.D. Brakes or HA3 Rear Axle is specified	R05	N.A.	72.00	72.00
Wheel, Spare: 19.5*x 6.00*. Available only when SF or SE 3-19.5/D or SG 8-19.5/E Tires are specified	Q34	N.A.	75.00	75.00
***************************************				

<sup>(</sup>a) D & H Charges on vehicle and optional equipment include reimbursement to ordering Division for any tax that it has paid, incurred or agreed to pay thereon.

State and local taxes not included.

CAB & BODY FEATURES
CHASSIS FEATURES
BODY CONSTRUCTION
COLOR & TRIM CHARTS

#### **EXTERIOR FEATURES—STANDARD MODELS**

The Standard models include the following items as standard equipment.


#### **FC CHASSIS**

- Bumper: Front; painted white
- Color: Chassis and components painted black
- Emblem: Bright Chevrolet emblem/GMC letters (furnished loose in parts box)
- Hom: Single; low note; electric
- Hub Caps: Bright metal with black and othre trim (single rear wheels only)
- Instruments:
  - Gages: Speedometer, odometer, fuel, voltmeter, oil pressure, and engine temperature
  - Switches: Exterior lights; instrument lights; headlight beam (foot); ignition; direction signal with lane change position;
  - and hazard warning Warning lights: Service-parking brake system; direction/hazard signals, and high beam
- NOTE: Ignition, direction signal, and hazard warning switches are installed; all other gages, switches, and warning lamps are furnished loose in parts box
- Lights: Furnished loose in parts box
  - ombination parking/direction/hazard: Two froid Combination tail/stop/direction/hazard: Two rear
  - Headlamps: Two; Power Beam License Plate: Two rear
- Steering Wheel: 16" diameter; 2-spoke; black soft vinyl
- Wheels: Painted white


#### **ALL STEP-VANS/VALUE VANS**

- Bright Appearance Items:
  - Combination Step-Van/Value Van/Senes Nameplate: Front side panel
- Bumpers: Front painted white and rear painted black; top surface of rear step bumper is slip resistant
- Color: See Exterior and Interior Color Selection Chart
- Door Body Protection Bumpers: Rubber, mounted at rear of body to prevent body damage when opening rear doors
- Door Opening and Locking Methods: Front sliding side doors: RH & LH; rotary latch pushbutton release; outside key lock cylinder in RH side door Rear Panel Doors: RH & LH; RH door contains turn handle
  - latch release and outside key lock cylinder; LH door opened by inside release at top of door
- Front Hood: Access to battery, radiator, oil filler and dipstick and brake master cylinder
- Glass:
  - Two piece windshield: tinted
  - Stationary front quarter glass: Between front windshield pillar and side door opening on each side Sliding side glass in LH side door; stationary glass in RH side


  - Stationary glass in each rear door panel
- Horn: Single; low note; electric
- Hub Caps: Bright metal with black and ochre trim (single rear wheels only)
- Identification: "CHEVROLET/GMC" on roof over rear doors
- Instruments: Same as for FC Chassis, except that all switches, gages and lamps are installed
- Keys: Two-key system with separate keys for ignition switch and doors
- Lights: Back-up lamps: Two rear
  - Combination parking/direction/hazard: Two front
  - Combination tail/stop/direction/hazard: Two rear
  - Headlamps: Two; Power Beam License Plate: Two rear
  - Side Marker and Reflectors: Two front and two rear
  - Five amber front identification and clearance lamps
- Five red rear identification and clearance lamps • Mirrors: RH & LH; painted white; adjustable arm with two separate adjustable heads; one with flat glass and one with convex
- glass Steering Wheel: 16" diameter; 2 spoke, black soft vinyl
- Undercoating: Fully coated under floor, on side panels below floor, and on wheelhousings
- Wheels: Painted white
- Windshield Wipers and Washers: Electric; 2-speed wipers; coordinated washers



FC CHASSIS



STEEL STEP-VAN/VALUE VAN Chevrolet model shown (GMC model available)



ALUMINUM STEP-VAN/VALUE VAN GMC model shown (Chevrolet model available)

### EXTERIOR FEATURES—STANDARD MODELS

The Standard models include the following items as standard equipment.



### STEEL STEP-VANS/VALUE VANS

In addition to those items listed on the preceding page for all Step-Vans/Value Vans, the following items are also standard equipment:

Body Panels and Framing: Painted steel
 Grille Area:
 Grille Panel Openings: Painted white
 Headlamp—Parking Lamp Bezels: Painted silver
 Lettering: Painted white or black, depending upon exterior

color Moldings: Bright


#### **ALUMINUM STEP-VANS/VALUE VANS**

In addition to those items listed on the preceding page for all Step-Vans/Value Vans, the following items are also standard equipment:

- Body Panels and Framing: Aluminum

rille Area: Grille Panel: Aluminum Grille Panel Openings: Aluminum Headlamp—Parking Lamp Bezels: Bright brushed aluminum

Moldings: Bright

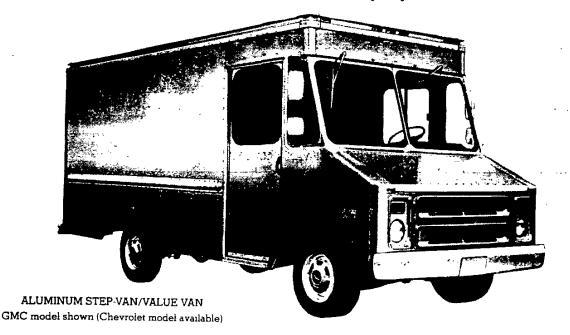

#### INTERIOR FEATURES—STANDARD MODELS


The standard models include the following items as standard equipment

#### **ALL STEP-VANS/VALUE VANS**

- Air Vent: Integral with Deluxe-air heater and vent with door on driver's side
- Colors: Driver area painted with Dark Blue non-reflective paint; area covers entire front-end interior in driver's line of vision. Remainder of interior painted Silver Gray (steel vans only)
- Door Locks: Inside lever lock/release
- Engine Access Cover: One piece molded fiberglass cover is held down by two rubber T-handles and catches and is entirely removable; with fiberglass insulation and rubber edge seals
- Heater and Defogger: Deluxe-air; two speed blower
- Instruments:
  - Gages: Speedometer, odometer, fuel, voltmeter, oil pressure, and engine temperature
  - Switches: Main, for control of exterior lights; instrument lights; front and cargo compartment dome lights; wiper-washer; head-

- light beam (foot); ignition; direction signal with lane change
- position; hazard warning; and heater fan Warning lights: Service-parking brake system; direction/hazard signals, and high beam
- Interior Lights: Instrument, front and rear compartment dome
- operated by main light switch

   Parcel Tray: Top of engine housing with raised edge
- Seat: Individual driver, foam padded, Dark Red grained vinyl; pedestal mounted, fold-forward type; pedestal lock secures seat in driving position; fully-adjustable: forward, backward, up, or down
- Seat Belt: Includes belt holder loops on seat frame; pushbutton
- Steering Wheel: 16" diameter; 2-spoke; black soft vinyl Visor: Driver's side, 8" x 10" tinted plexiglass, adjustable

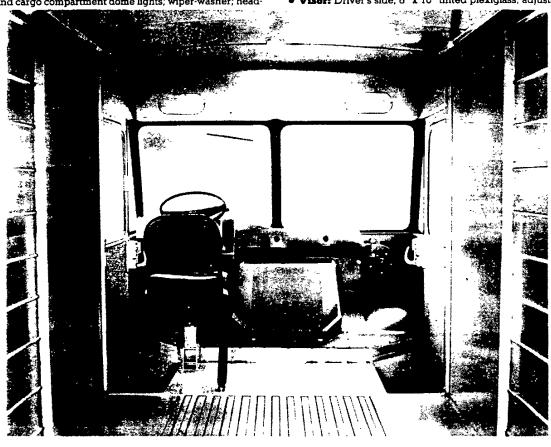

STEEL STEP-VAN/VALUE VAN


#### STEEL STEP-VAN/VALUE VAN

In addition to the items listed above for all Step-Vans/ Value Vans, the following items are also included

- Door Seals: Molded rubber; forward edge of front doors
- Floor Area:
  - Driver floor: Smooth steel
  - Floor between seat and load area and stepwells: Steel treadplate
- Load area: Corrugated 18-gage steel

  Inner Trim Panels: Covers inner side walls, rear end, and entire roof area (ribbed steel on sidewalls, smooth on roof)
- Insulation and Sound Deadening Material: Between outer and inner panels, the area is lined with 1" fiberglass; engine access cover underside fully insulated with fiberglass

#### INTERIOR FEATURES—STANDARD MODELS

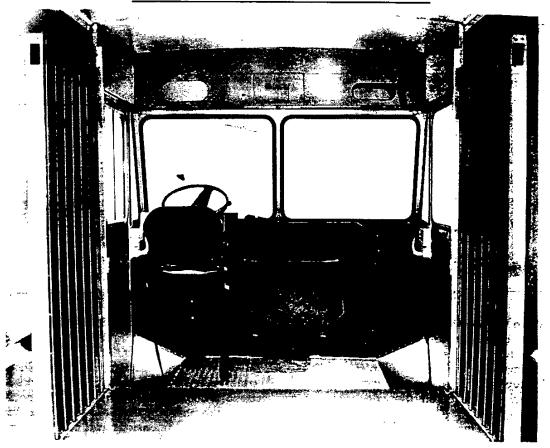

ALUMINUM STEP-VAN/VALUE VAN

#### **ALUMINUM STEP-VAN/VALUE VAN**


In addition to the items listed for all Step-Vans/Value Vans on the preceding page, the following items are also included:

- Door Seals: Foam rubber; recessed in the extrusion at the front of the side door opening; compresses against the front edge of the side door when door is closed
- Floor Area:

Driver area: Smooth steel
Load area: Smooth aluminum
Floor between seat and load area and stepwells: Aluminum
treadplate

- Inner Roof Trim Panel: Embossed aluminum; covers entire roof area
- Insulation and Sound Deadening Material: Between outer and inner roof panels the area is lined with 1" fiberglass; engine access cover underside fully insulated with fiberglass
- Side Sliding Door Guide: Aluminum extrusions; mounted on bottom of door opening; contains polypropylene inserts to guide opening of door; provides weather seal and eliminates door rattles
- Side Sliding Door Pockets: Corrugated rigid aluminum; completely encloses door when opened

## STEP-VAN/VALUE VAN — STEEL GENERAL FEATURES

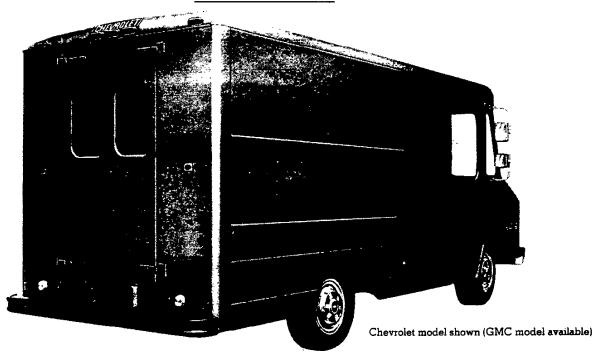

Step-Van/Value Van models are available in three standard nominal lengths of ten feet six inches, twelve feet six inches and fourteen feet six inches. The fourteenfoot six inch model is available only in the 30/3500 Series. All Step-Van/Value Van steel bodies feature rugged welded and bolted all-steel construction for maximum strength.

Front and rear side marker lights and roof-mounted identification and clearance lights are provided as stan-

dard equipment, mounted below the roof line for protection. Left- and right-hand dual-head outside rearview mirrors and rear door glass are also standard.

One-piece steel bathtub-type front wheelhousings help to protect the body from corrosion, and thick steel radiator supports help to strengthen overall structural rigidity.

See the chart on the Step-Van/Value Van dimension page for dimensions and cubic capacities of all the bodies.

#### SERVICE FEATURES



GMC model shown (Chevrolet model available)

The design features a front opening hood for better service access to the engine, battery, radiator, and other chassis items.


Note: See white tabs Special Equipment for Union City Bodies and Special Equipment Options for a listing of special items.

Step-Van/Value Van—Page F

**General Motors Corporation** 

September, 1983

## STEP-VAN/VALUE VAN—STEEL BODY FEATURES

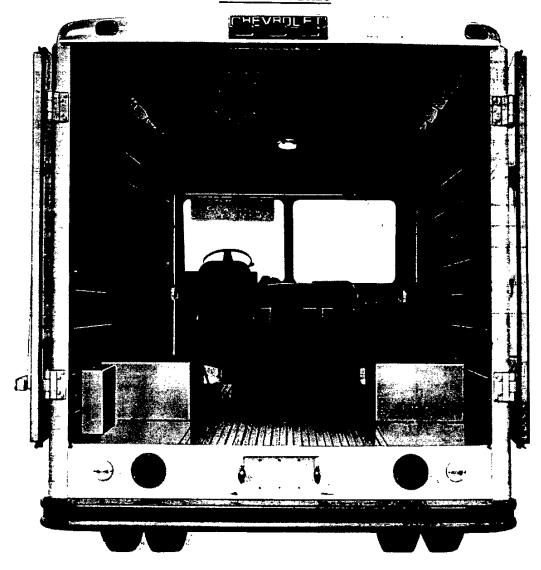

Steel panels line the body interior, providing a smooth surface that is both durable and practical. One inch thick fiberglass pads are used between the inner and outer panels of the sides, rear end and roof for sound deadening and insulation against heat and cold. The load compartment floor is constructed of 18-gage steel with corrugated center panel for rugged strength and ease in sliding loads in and out. The wheelhousings are rectangular for simplicity when loading all around them. A smooth floor of 11-gage steel is also available optionally.


The double-wall constructed sliding front doors are completely enclosed in door pockets when opened, which prevent objects from wedging or interfering with their sliding operation. An outside key lock is provided for the passenger side door. The glass in the driver side door is the aluminum-framed sliding type while the passenger side has fixed glass. Sliding glass is available for this window as an option.


The rear bumper has a treadplate type upper surface to give safer footing while climbing in and out of the load space.


Double rear doors with a window in each and a total width of 38" are standard. The right-hand door has an inside latch which engages at both the top and bottom and can be operated either by an inside handle or an outside key-locking handle. The left hand door has an inside latch at the top. Optional rear doors include double rear doors similar to the standard ones, but with a 60" width. Also available is a 74" wide wraparound door option with strap hinges. Extensive corrosion protection measures are employed, including use of corrosion-resistant steels, special sealers, corrosion-resistant coatings or fasteners, and underbody coatings.


#### STEP-VAN/VALUE VAN -- STEEL

#### **DIMENSIONS**

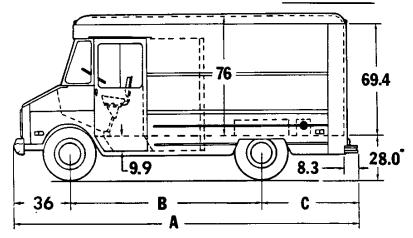



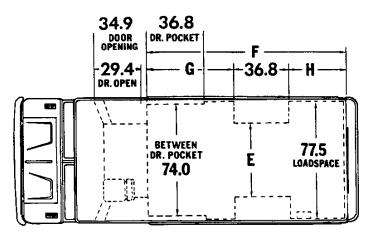



		Model Availability				
		Body Ordering Code—E32				
	DIMENSIONS With Standard Equipment, Unloaded	P208-30842	P210-31042	P31442		
		- <u>-</u> -	Body Length			
		Std 10'6"	Std 12'6"	Std 14'6"		
A	Overail Length (In)	226.7	250.7	274.7		
В	Wheelbase (In)	125	133	157		
С	Rear Overhang (In)	65.7	81.7	81.7		
D	Standard Rear Door Width (In) Optional Rear Door Width (In) Optional Rear Door Width (In)	38 60 74.1	38 60 74.1	38 60 74.1		
E	Width Between Wheelhousings—Single Rear (In) Optional—with Dual Rear Wheels (In)	48 40	48 40	48 40		
F	Overall Load Space Length (In)	129.6	153.6	177.6		
G	Front of Wheelhousing (In)	55.6	63.6	87.6		
Н	Rear of Wheelhousing (In)	37.2	53.2	53.2		
	Cubic Capacity (Cu Ft)	415.5	496.5	577.5		
	Sign Panel Area (In x In)	54 x 125.5	54 x 149.5	54 x 173.5		

<sup>\*</sup>This dimension varies depending on spring, tire and wheel size.

### STEP-VAN/VALUE VAN STEP-VAN/VALUE VAN — ALUMINUM GENERAL FEATURES




Step-Van/Value Van Aluminum models are available in standard nominal lengths of ten feet six inches and twelve feet six inches on P20/2500 Series and ten feet six inches, twelve feet six inches, and fourteen feet six inches on P30/3500 Series. Body construction is of aluminum extrusions forming a rigid integral framework, covered with riveted heavy-gage aluminum panels which can be removed for repair or replacement if damaged. The light weight and freedom from rust offer more efficient transport of goods and lower body maintenance costs. Payload capacity is greater than that of a comparable steel van.

All Step-Van/Value Van Aluminum models feature square front end styling with a front opening hood for better engine access. Front and rear side marker lights, roof-mounted identification and clearance lights are standard as are left-hand and right-hand outside dual-head rearview mirrors and rear door glass.

One-piece steel bathtub-type front wheelhousings help to protect the body from road splash, and a one-piece steel radiator support helps to strengthen overall structural rigidity. The hood panel is thick aluminum with liberal reinforcement by especially designed extrusions, and is secured by a two-position plunger automotive type latch.

Optional increases in width and height are available, either separately or in combination with each other, making a total of six possible body sizes on each wheelbase. See the chart on the dimension page for dimensions and cubic capacities of all the bodies.

#### **SERVICE FEATURES**



Chevrolet model shown (GMC model available)

The design features a front opening hood for better service access to the engine, battery, radiator and other chassis items.

Note: See white tabs Special Equipment For Union City Bodies and Special Equipment Options for a listing of special items.

September, 1983

**General Motors Corporation** 

Step-Van & FC Chassis—Page I

## STEP-VAN/VALUE VAN—ALUMINUM BODY FEATURES



Embossed aluminum headlining with 1" insulation is standard. Driver's compartment header trim panels with access plates provide a finished appearance without reducing service ease. Unobstructed load space features rectangular wheelhousings for simplicity in loading. The load compartment floor is smooth for ease in sliding loads in and out.

The solid laminate sliding front doors are completely enclosed in rigid corrugated door pockets when opened, which prevent objects from wedging or interfering with their sliding operation.

An aluminum-framed sliding window is standard in the driver's side door, while the passenger's side has fixed glass. Sliding glass is available for this window as an option.


The steel rear bumper has a treadplate-type upper surface to give safer footing while entering or leaving the load space. Double rear doors with a window in each and a total width of 38" are standard. The left-hand door has an inside latch at the top, while the right-hand door utilizes a latch which engages at both the top and bottom and can be operated either by an inside handle or an outside key-locking handle. Heavy-duty hardware is standard and both the right side and rear doors have outside key locks keyed alike. Rugged heavy-duty strap hinges are also standard.


Optional rear doors include double rear doors similar to the standard doors but with a 60" width. Also available are three wrap-around door options in widths of 74," 83," and 87." The 83" door option is available only with the optional 9" additional body width, while the 87" door option is available only with the optional 13" additional body width.


The underside of the body, front and rear wheel-housings, and side panels below floor level are fully undercoated.


## STEP-VAN/VALUE VAN—ALUMINUM












		Model Availability			
			Body Orderi	ng Code – E33	
	DIMENSIONS With Standard Equipment, Unloaded	P208-30842	P210-31042	P31442	P31842
	Milli bernand adminent america		Body	Length	
		Std 10'6"	Std 12'6"	Std 14'6"	Std 18'
A	Overall Length (In)	226.6	250.6	274.6	316.6
В	Wheelbase (In)	125	133	157	178
С	Rear Overhang (In)	65.6	81.6	81.6	102.6
D	Standard Rear Door Width (In) Optional Rear Door Widths (In)	38 60, 73, 82, 85.7	38 60, 73, 82, 85.7	38 60, 73, 82, 85.7	38 60, 73, 82, 85.7
E	Width Between Wheelhousings—Single Rear (In) Optional—with Dual Rear Wheels (In)	48 40	48 40	48 40	- 40
F	Overall Loadspace Length (In)	128	152	176	218
G	Front of Wheelhousing (In)	54.5	62.5	86.5	107.5
Н	Rear of Wheelhousing (In)	34.3	50.3	50.3	71.3
J	Standard Interior Height (In) Optional Interior Height (In)	76.2 80.2	76.2 80.2	76.2 80.2	76.2 80.2
К	Standard Rear Door Height (In) With Optional 80" Interior Height (In)	70 74	70 74	70 74	70 74
*L	Standard Overall Height (In) With Optional 80" Interior Height (In)	113.7 117.7	113.7 117.7	113.7 117.7	113.7 117.7
М	Standard Overall Width (In) With Optional 9" Additional Width With Optional 13" Additional Width	83.1 92.1 95.8	83.1 92.1 95.8	83.1 <sup>2</sup> 92.1 95.8	92.1 95.8
	Cubic Capacity (Ft)			Std Opt Opt 14'6" 15'6" 16'	
	With Standard 76" Interior Height With 9" Additional Body Width With 13" Additional Body Width With Optional 80" Interior Height With 9" Additional Body Width With 13" Additional Body Width	421.5 469.5 488.5 443.5 493.5 515.5	501.5 560.5 583.5 529.5 590.5 615.5	583.5 624.4 644.9 652.5 698.1 720.9 679.5 727.3 751.1 615.5 658.6 680.1 686.5 734.5 758.5 715.5 765.8 790.9	726.5 811.5 845.5 765.5 853.5 890.5
	Standard Sign Panel Area (In x In) With Optional 80" Interior Height (In x In)	54 x 125.5 58 x 125.5	54 x 149.5 58 x 149.5	54 x 173.5 58 x 173.5	54 x 215.5 58 x 215.5

<sup>\*</sup>This dimension varies depending on spring, tires and wheel size.

## STEP-VAN/VALUE VAN BODY CONSTRUCTION

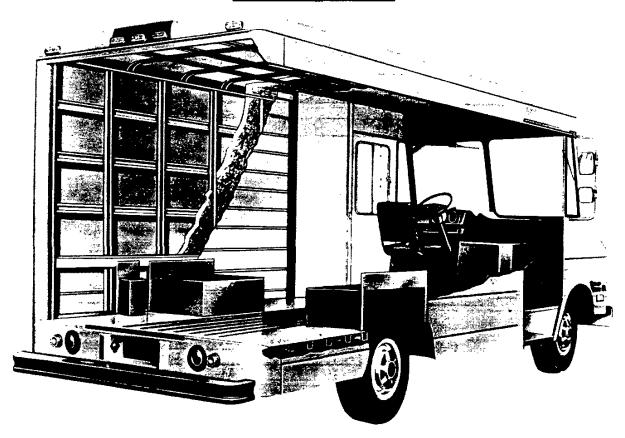

#### STEEL BODIES

The Step-Van/Value Van Steel bodies consist of six major fabricated assemblies; the front end, floor, right and lefthand sides, roof, and rear end. Each of these assemblies consists of a rigid framework of heavy, stamped structural members with the outer skin panels joined to them by welding. The six major assemblies are positioned in massive welding fixtures that align and hold all structural members and panels rigidly and accurately to insure uniformity during final welding and assembly.

Prior to final assembly the sub-assemblies are run through a three-stage acid, phosphate and water wash to remove oil and prepare the surfaces for painting. Any areas which will be hidden during the assembly process are then primed, which includes most of the inner surfaces and the underfloor structure.


To resist corrosion, extensive use is made of weldthrough primers and all coach seams and joints are thoroughly sealed. The exterior body panels, front stepwells and rear wheelhouses are fabricated of ironzinc alloy steel, and the chassis splash fenders are integrated into the front end structure to afford additional protection from road splash. Corrosion-resistant coatings are used on fasteners, with cadmium-plated rear door strap hinges.

The major body assemblies are then mounted on the chassis, and are joined by bolting, welding and riveting. Mastic is applied to the inside of the body shell and one inch-thick fiberglass mats applied in the roof, sides and rear end. Steel interior trim panels are primed on both sides before installation.

The Step-Van/Value Van body is then primed and baked in a two-stage oven before the finish coat is applied. The interior is finished in grey hammertone and the exterior is finished in highgloss enamel and are again baked in two-stage ovens. The underbody is then undercoated in its entirety, and rustproofing compound applied to the interior and side doors to inhibit corrosion.

STEP-VAN/VALUE VAN

#### **BODY CONSTRUCTION**

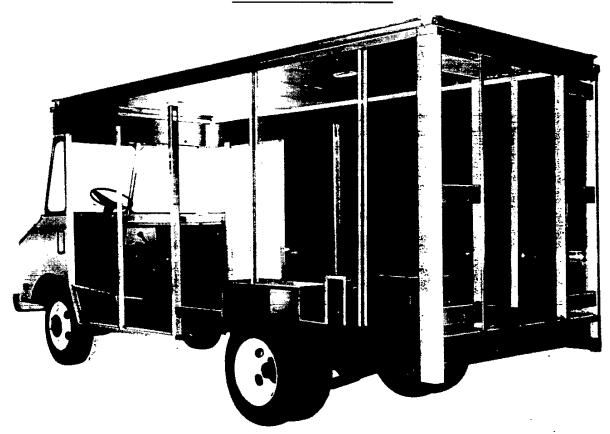

#### **ALUMINUM BODIES**

The Step-Van/Value Van Aluminum with aluminum body features complete framing of the body with aluminum extrusions. All extrusions are joined, by riveting or welding, to form an extremely rigid integral framework. These extrusions are designed for their specific application.

Special alloy body panels are riveted to this extrusion framework and can be removed for repair or replacement.

The aluminum load floor panels are smooth. Wheelhousing structure is of heavy aluminum sheet reinforced and welded together to form a strong rectangular box. Floor panels are welded to transverse cross-sills of sturdy hat-shaped aluminum extrusions, with the wheelhousings riveted into the assembly. Cross-sill spacing is closer at the rear of the loadspace floor, where loading impacts are greatest.

The front end structure consists of specially designed aluminum extrusions, riveted and welded together to form a rugged framework. The outer skin of aluminum sheet is riveted to the frame structure. The front opening hood is reinforced aluminum. The driver's compartment floor rearward of the seat and step area of the stepwells are of aluminum treadplate.

The sides are of frame and skin construction. Special alloy aluminum sheet panels are riveted to the extrusion framework, wheelhousings, floor, and a sturdy half-round crash rail to form rigid structures.

The roof is built around symmetrical side, front and rear extrusions. At each corner the extrusions bolt to castings designed to fit this complex shape. The outer skin is a flat sheet which is rolled over the extrusion flanges around its outer edge, with all rivets being outside the roof structure to prevent leaks. Transverse roof bows of H-shaped extrusions provide support for the outer skin.

The rear end is a riveted and welded assembly of aluminum panels and heavy-duty extrusions. The rear door frames are special complex shaped extrusions, miter cut and welded. Thick aluminum exterior panels are riveted to these frames, and inner reinforcements support door hinges and hold-open stops.

A sturdy steel transmission cross-sill assembly and one-piece steel bathtub front wheelhousings are shared with the steel Step-Van/Value Van and afford even greater rigidity and protection to the front end assembly.

## STEP-VAN/VALUE VAN INTERIOR AND EXTERIOR COLOR AVAILABILITY CHART

Note: For Special Paint Applications Please Contact the Zone Office. When dealer arrangements for special paint have been made with Union City Body Company, Code 0101 must be added to the primary and secondary paint area of dealer order. Seat(s) are trimmed in Dark Red grained vinyl.

EXTERIOR COLORS	Primary	Secondary	Interior Color Silver
BLUE, GALAXY (Metallic)	28	28	Х
BLUE, LIGHT (Metallic)	21	21	Х
BRONZE, INDIAN (Metallic)	66	66	X
RED, APPLE	72	72	x
RED, AUTUMN (Metallic)	76	76	X
SAND, DESERT (Metallic)	64	64	X
SILVER (Metallic)	16	16	x
TAN, DOESKIN	61	61	X
WHITE, FROST	12	12	Х
YELLOW, COLONIAL	53	53	X
BODY, BARE ALUMINUM (Aluminum Step-Van/Value Van Only)	02	02	х
BODY IN PRIME	00	00	X

#### SOLID PAINT-ZY1



## FC CHASSIS EXTERIOR COLOR CODE CHART

,			
٠, [	EXTERIOR COLOR	Primary	Secondary
	SPECIAL PAINT	01	01

